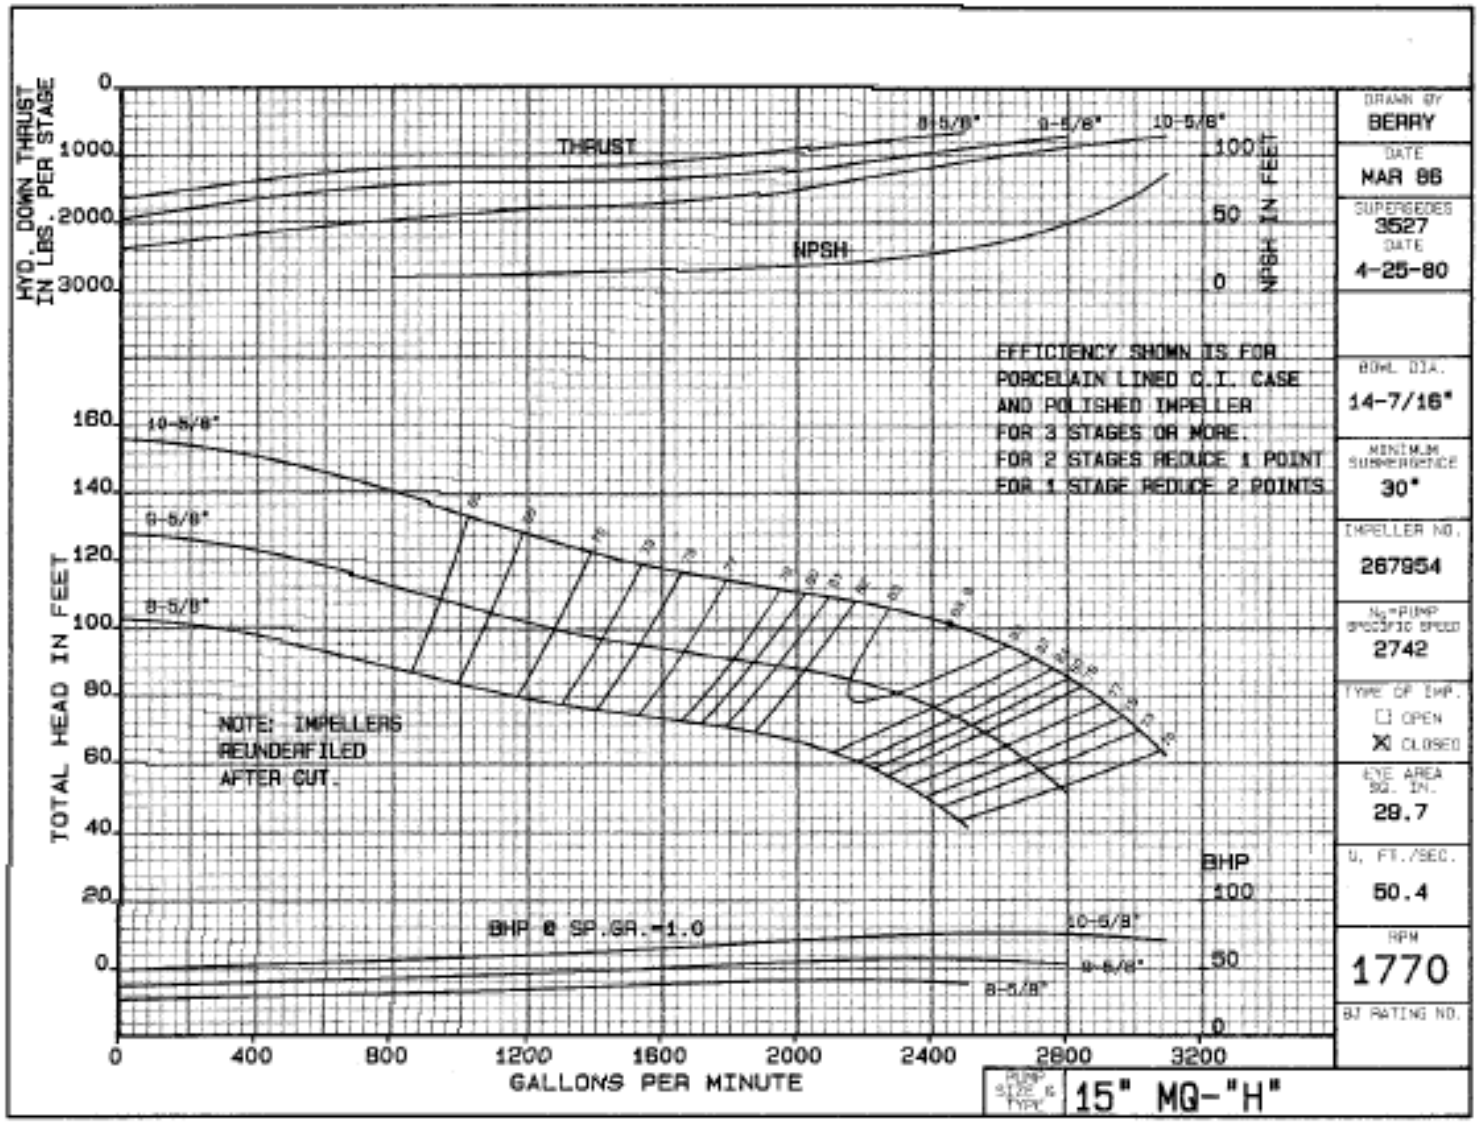
HYD. DOWN THRUST IN LBS. PER STAGE
THRUST
8-5/8"
9-5/8"
10-5/8"
NPSH
NPSH IN FEET
EFFICIENCY SHOWN IS FOR PORCELAIN LINED C.I. CASE AND POLISHED IMPELLER FOR 3 STAGES OR MORE. FOR 2 STAGES REDUCE 1 POINT FOR 1 STAGE REDUCE 2 POINTS
TOTAL HEAD IN FEET
NOTE: IMPELLERS REUNDERFILED AFTER CUT.
BHP
BHP @ SP.GR.=1.0
GALLONS PER MINUTE
DRAWN BY
BERRY
DATE
MAR 86
SUPERSEDES
3527
DATE
4-25-80
BOWL DIA.
14-7/16"
MINIMUM SUBMERGENCE
30"
IMPELLER NO.
267954
Ns=PUMP SPECIFIC SPEED
2742
TYPE OF IMP.
OPEN
X CLOSED
EYE AREA SQ. IN.
29.7
U, FT./SEC.
50.4
RPM
1770
BJ RATING NO.
PUMP SIZE & TYPE
15" MQ-"H"