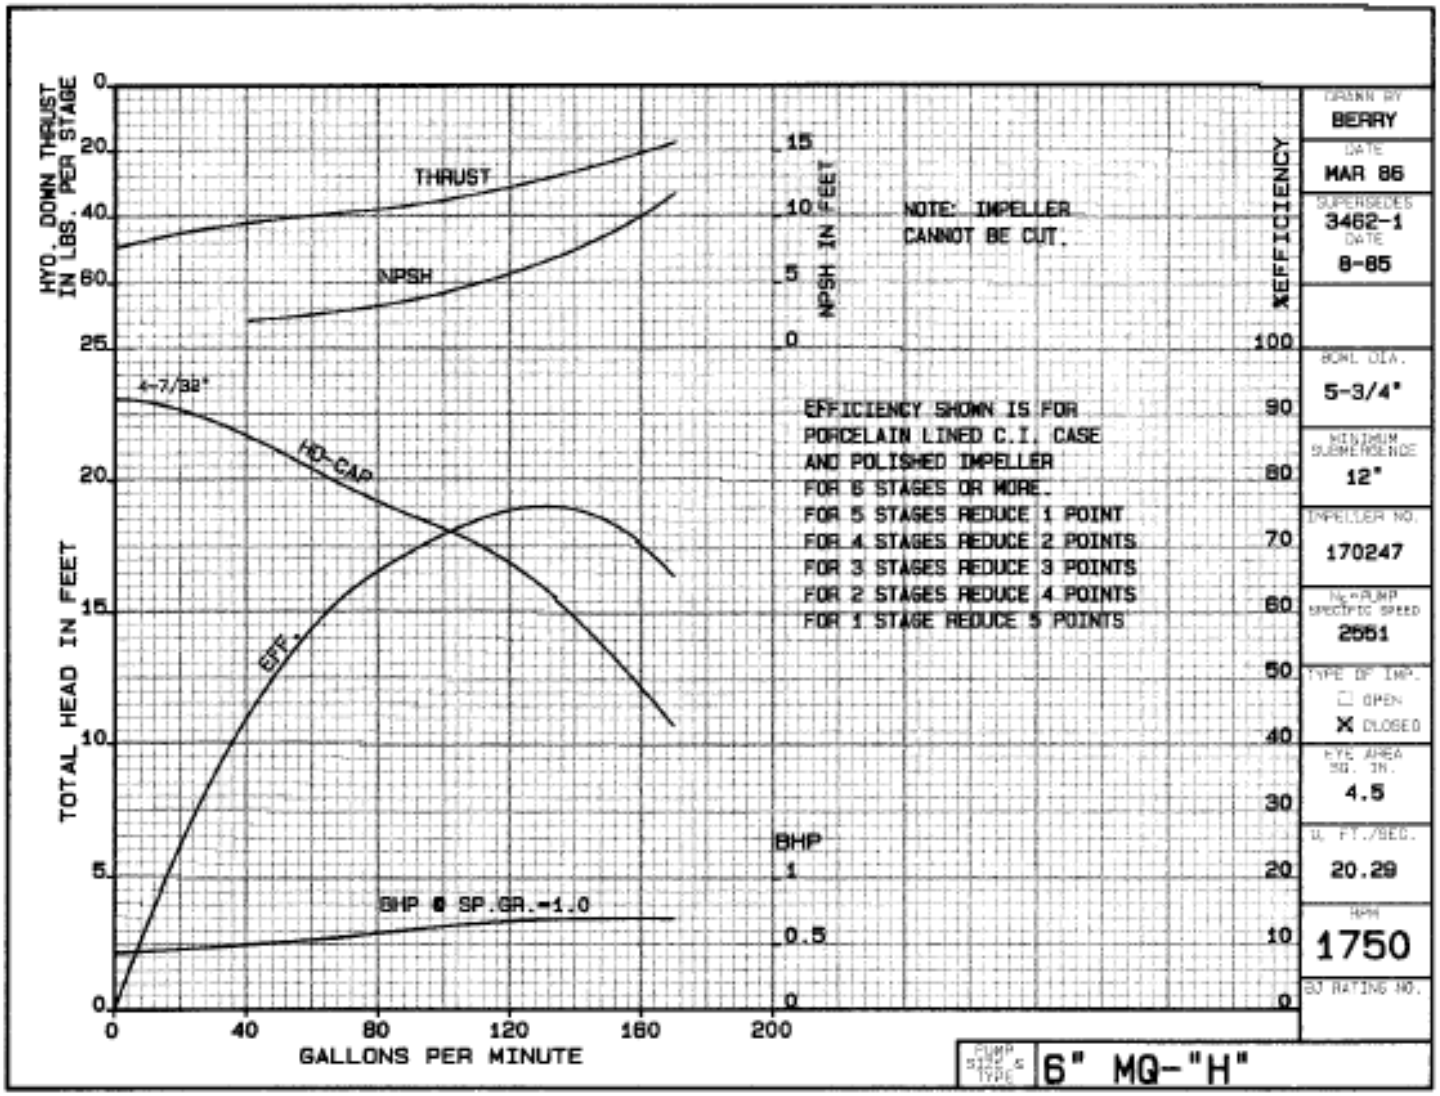
HYD. DOWN THRUST IN LBS. PER STAGE
THRUST
NPSH
NPSH IN FEET
NOTE: IMPELLER CANNOT BE CUT.
%EFFICIENCY
4-7/32"
HD-CAP
EFF.
EFFICIENCY SHOWN IS FOR PORCELAIN LINED C.I. CASE AND POLISHED IMPELLER
FOR 6 STAGES OR MORE.
FOR 5 STAGES REDUCE 1 POINT
FOR 4 STAGES REDUCE 2 POINTS
FOR 3 STAGES REDUCE 3 POINTS
FOR 2 STAGES REDUCE 4 POINTS
FOR 1 STAGE REDUCE 5 POINTS
TOTAL HEAD IN FEET
BHP
BHP @ SP.GR.=1.0
GALLONS PER MINUTE
DRAWN BY
BERRY
DATE
MAR 86
SUPERSEDES
3462-1
DATE
8-85
BOWL DIA.
5-3/4"
MINIMUM SUBMERGENCE
12"
IMPELLER NO.
170247
Ns=PUMP SPECIFIC SPEED
2551
TYPE OF IMP.
☐ OPEN
X CLOSED
EYE AREA SQ. IN.
4.5
U. FT./SEC.
20.29
RPM
1750
BJ RATING NO.
PUMP SIZE & TYPE
6" MQ-"H"