



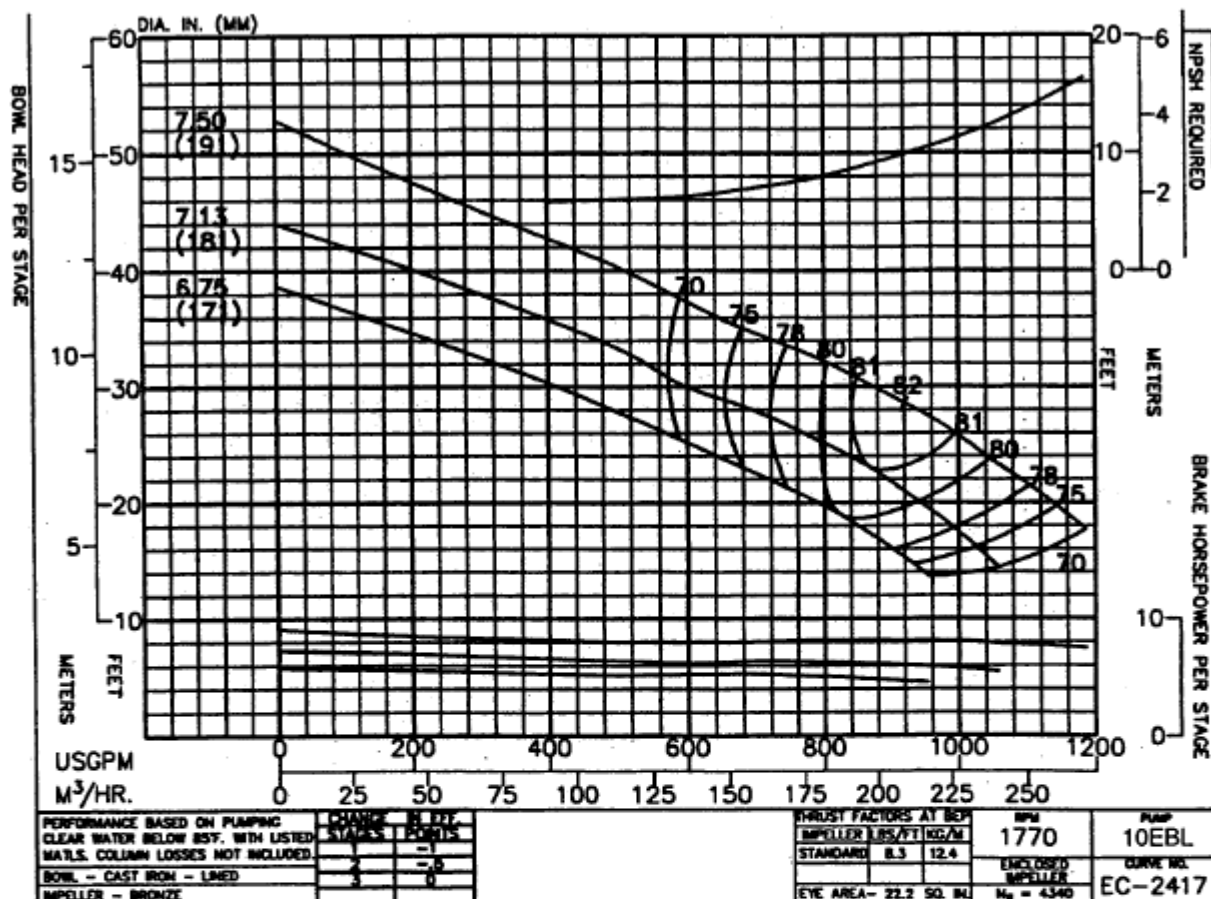

Column	Nom. Size	Max. GPM	"A" Flanged	"B" Threaded
Optional	6"	600	9.50"	9.50"
Standard	8"	1500	11.50"	9.63"
Optional				

RATINGS			
Max. Pressure = 472 psi based on Class 30 Iron bowls			
Impeller and Shaft Weight = 16.7 pounds per stage			
Pump Shaft	Diameter = 1.50 inches		
	Max. HP = 200 with 416 SS Pump Shaft		
Line Shaft Size	1.00	1.25	1.50
Line Shaft H.P.	57	115	200

Additional Data	
Max. Operating Speed	2100
Max. No. of Stages	20
Max. Sphere Size	.25
End Play	.50
WR 2 Per Stage	.49
Bowl Ring Clearance	.004 - .006
Impeller Running Clearance (3)	0.125

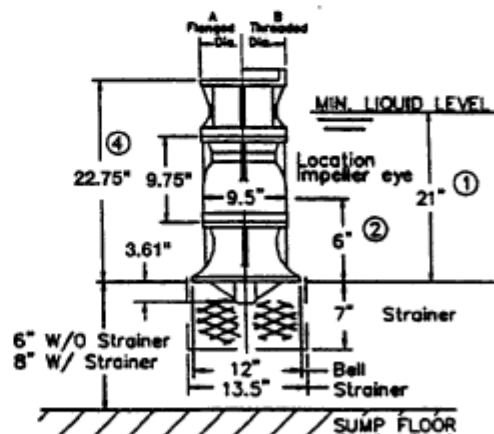

- | | |
|---|--|
| <p>(1) Minimum submergence required to prevent vortex formation. The submergence needed to provide adequate NPSH to the first stage. Impeller may be greater or less than shown. The larger of the two values must be used to determine actual minimum allowable submergence.</p> | <p>(2) Location of eye of first stage impeller. Used to calculate NPSH. This is also the minimum priming submergence. (See note 1).</p> <p>(3) Vertical impeller to Bowl running clearance after shaft stretch.</p> <p>(4) For Suction Case dimensions see sheets 20.25 and 20.27.</p> |
|---|--|

All Specifications Subject to Change Without Notice.