



Company: Bonneville Power Administration

Name:

Date: 2/8/2007

Selection: FPI

Pump:

Size: AF-60-54-236

Type: AXIAL FLOW
Synch speed: 240 rpm

Curve:
Specific Speeds:

Dimensions:

Speed: 236 rpm
Line: A

Impeller:
Ns: ---
Nss: ---

Suction: --- in
Discharge: --- in

Search Criteria:

Flow: --- US gpm

Head: --- ft

Fluid:

Water
Density: 62.25 lb/ft³
Viscosity: 1.105 cP
NPSHa: --- ft

Temperature: 60 °F
Vapor pressure: 0.2563 psi a
Atm pressure: 14.7 psi a

Motor:

Standard: NEMA
Enclosure: TEFC

--- hp
Speed: ---
Frame: ---


Sizing criteria: Max Power on Design Curve

Pump Limits:

Temperature: --- °F
Pressure: --- psi g
Sphere size: --- in

Power: --- hp
Eye area: --- in²

---- Data Point ----	
Flow:	77527 US gpm
Head:	9.19 ft
Eff:	85%
Power:	212 hp
NPSHr:	14.6 ft
---- Design Curve ----	
Shutoff head:	12.5 ft
Shutoff dP:	5.39 psi
Min flow:	--- US gpm
BEP:	85% @ 77527 US gpm
NOL power:	254 hp @ 59906 US gpm
-- Max Curve --	
Max power:	254 hp @ 59906 US gpm

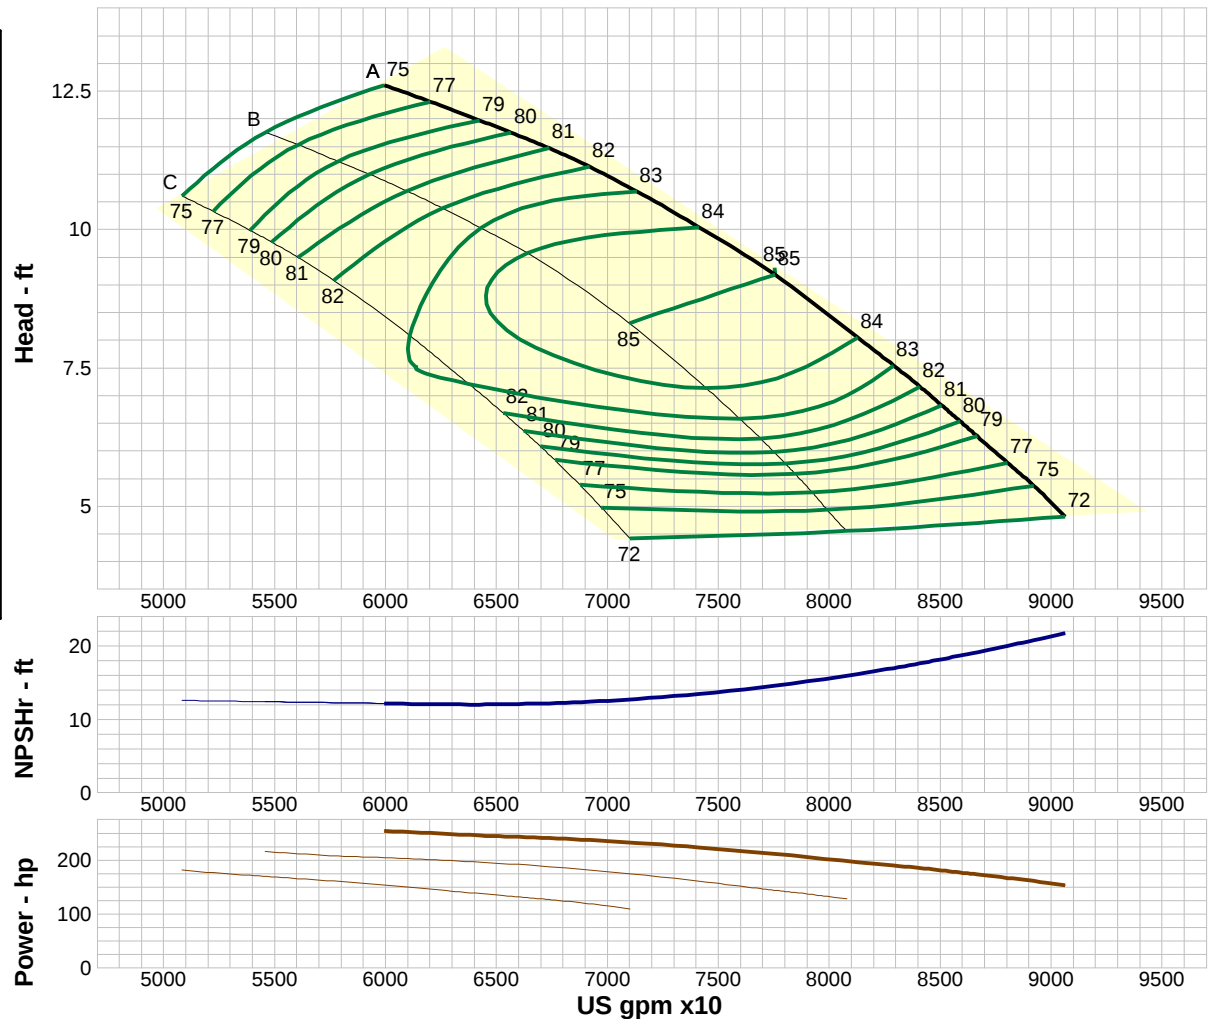

The performance is guaranteed for the design point only when pumping clean water at 85 degrees F. Consult factory for certified performance curve.

Performance Evaluation:

Flow US gpm	Speed rpm	Head ft	Efficiency %	Power hp	NPSHr ft
86981	236	6.15	78.5	172	19.4
72484	236	10.4	83.4	228	13.1
57987	236	---	---	---	---
43490	236	---	---	---	---
28994	236	---	---	---	---