



Company: Bonneville Power Administration

Name:

Date: 2/8/2007

Selection: FPI

Pump:

Size: AF30-26-505

Type: AXIAL FLOW

Synch speed: 515 rpm

Curve:

Specific Speeds:

Dimensions:

Speed: 505 rpm

Line: A (30)

Impeller:

Ns: ---

Nss: ---

Suction: --- in

Discharge: --- in

Search Criteria:

Flow: --- US gpm

Head: --- ft

Fluid:

Water

Density: 62.25 lb/ft³

Viscosity: 1.105 cP

NPSHa: --- ft

Temperature: 60 °F

Vapor pressure: 0.2563 psi a

Atm pressure: 14.7 psi a

Motor:

Standard: NEMA

Enclosure: TEFC

--- hp

Speed: ---

Frame: ---

Sizing criteria: Max Power on Design Curve

Pump Limits:


Temperature: --- °F

Pressure: --- psi g

Sphere size: --- in

Power: --- hp

Eye area: --- in²

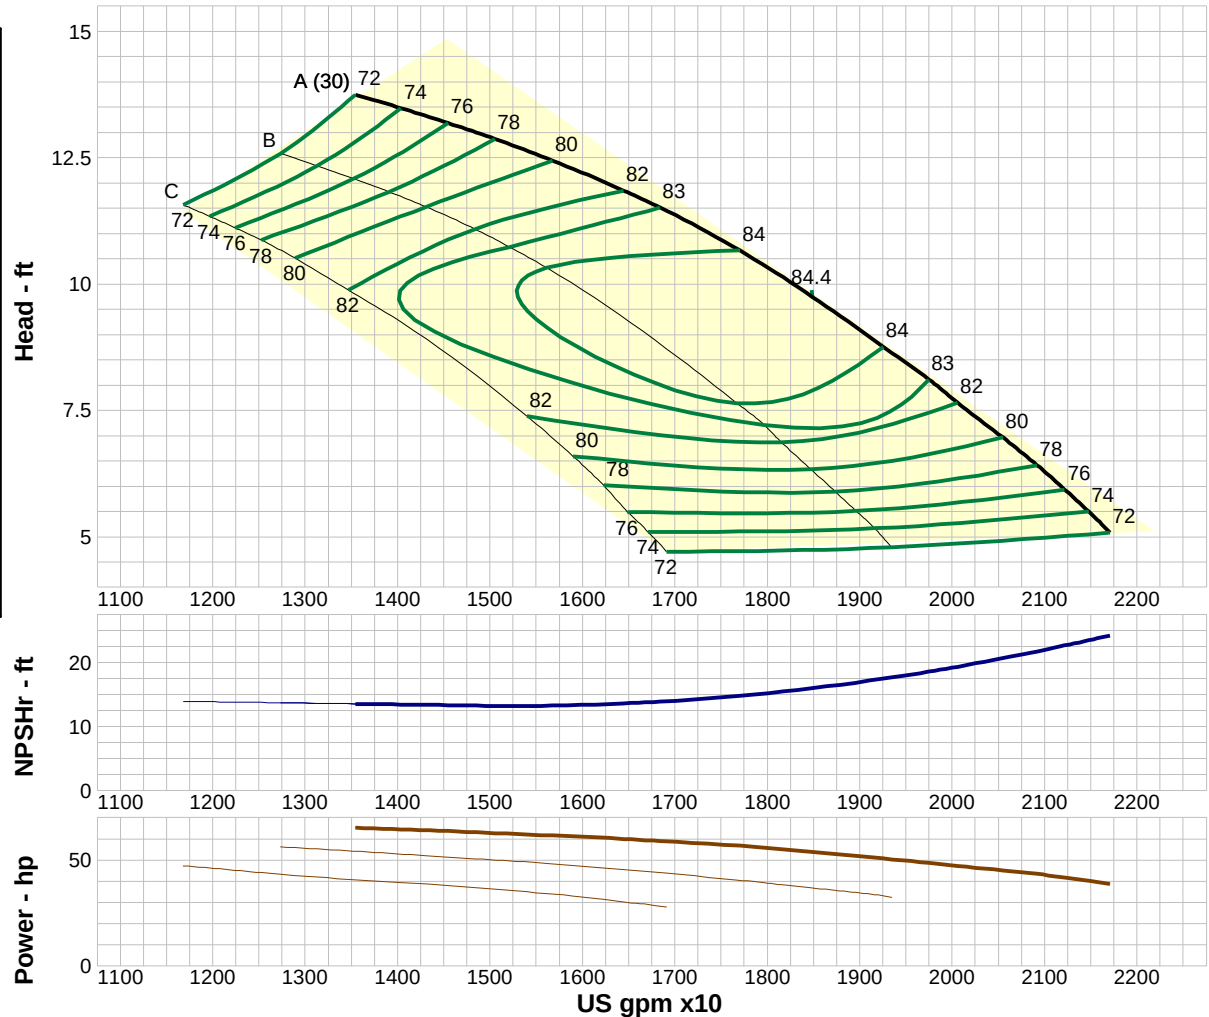

The performance is guaranteed for the design point only when pumping clean water at 85 degrees F. Consult factory for certified performance curve.

Performance Evaluation:

Flow US gpm	Speed rpm	Head ft	Efficiency %	Power hp	NPSHr ft
20836	505	6.53	78.4	43.8	21.6
17363	505	11	83.6	57.6	14.5
13890	505	13.6	73.4	64.8	13.5
10418	505	---	---	---	---
6945	505	---	---	---	---