



Company: Bonneville Power Administration

Name:

Date: 2/8/2007

Selection: FPI

Pump:

Size: AF18-16-585

Type: AXIAL FLOW
Synch speed: 600 rpm

Curve:

Specific Speeds:

Dimensions:

Speed: 585 rpm
Line: A (18)

Impeller:

Ns: ---
Nss: ---

Suction: --- in
Discharge: --- in

Search Criteria:

Flow: --- US gpm

Head: --- ft

Fluid:

Water
Density: 62.25 lb/ft³
Viscosity: 1.105 cP
NPSHa: --- ft

Temperature: 60 °F
Vapor pressure: 0.2563 psi a
Atm pressure: 14.7 psi a

Motor:

Standard: NEMA
Enclosure: TEFC

--- hp
Speed: ---
Frame: ---


Sizing criteria: Max Power on Design Curve

Pump Limits:

Temperature: --- °F
Pressure: --- psi g
Sphere size: --- in

Power: --- hp
Eye area: --- in²

---- Data Point ----	
Flow:	5007 US gpm
Head:	4.97 ft
Eff:	84.1%
Power:	7.47 hp
NPSHr:	9.09 ft
---- Design Curve ----	
Shutoff head:	6.73 ft
Shutoff dP:	2.91 psi
Min flow:	--- US gpm
BEP:	84.1% @ 5007 US gpm
NOL power:	8.89 hp @ 3807 US gpm
-- Max Curve --	
Max power:	8.89 hp @ 3807 US gpm

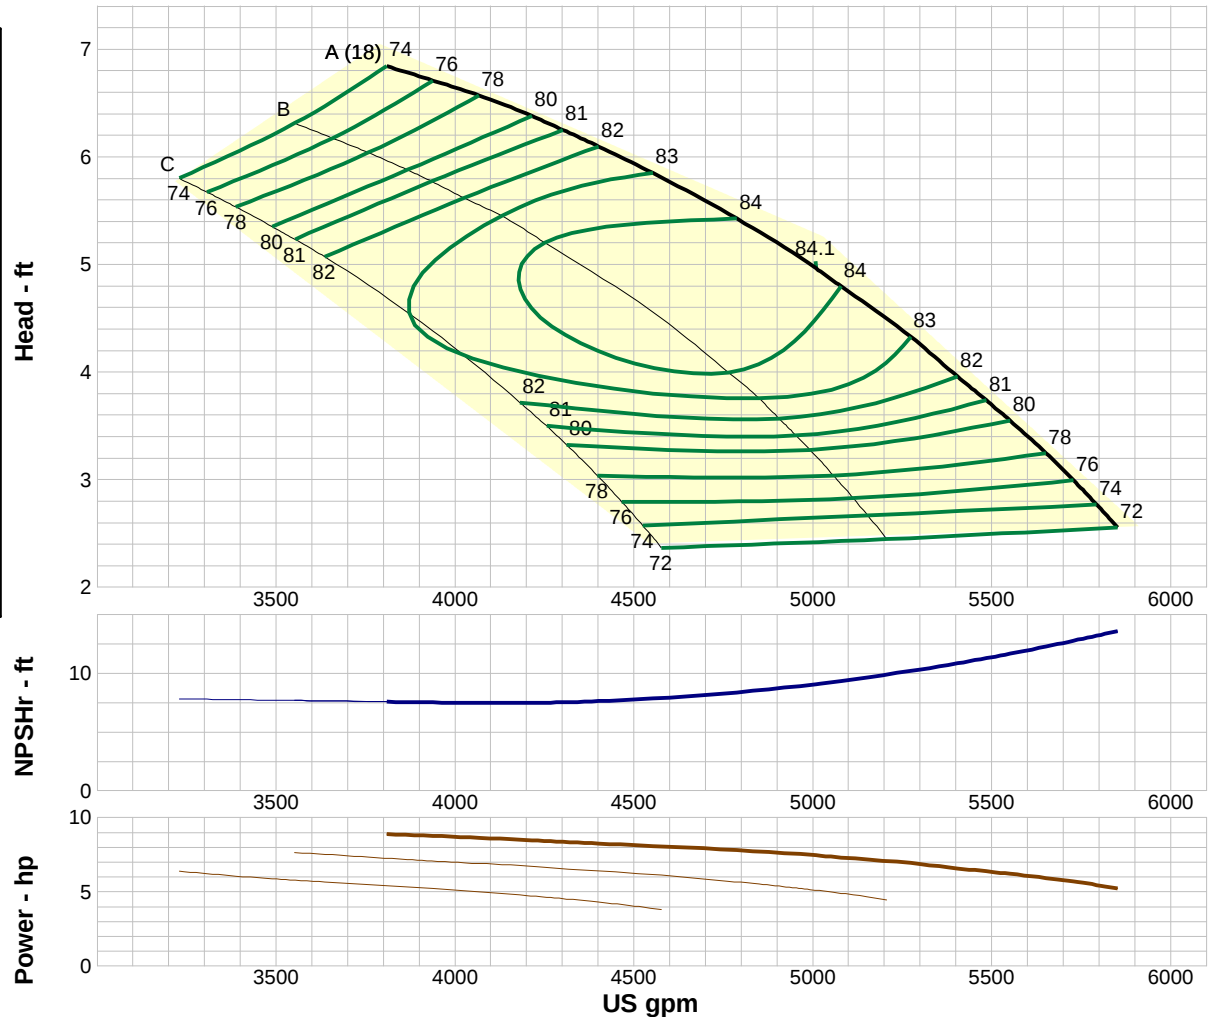

The performance is guaranteed for the design point only when pumping clean water at 85 degrees F. Consult factory for certified performance curve.

Performance Evaluation:

Flow US gpm	Speed rpm	Head ft	Efficiency %	Power hp	NPSHr ft
5616	585	3.35	78.7	6.04	12.1
4680	585	5.62	83.5	7.94	8.15
3744	585	---	---	---	---
2808	585	---	---	---	---
1872	585	---	---	---	---