



Company: Bonneville Power Administration

Name:

Date: 2/8/2007

Selection: FPI

Pump:

Size: AF18-16-705

Type: AXIAL FLOW

Synch speed: 720 rpm

Curve:

Specific Speeds:

Dimensions:

Speed: 705 rpm

Line: A (18)

Impeller:

Ns: ---

Nss: ---

Suction: --- in

Discharge: --- in

Search Criteria:

Flow: --- US gpm

Head: --- ft

Fluid:

Water

Density: 62.25 lb/ft³

Viscosity: 1.105 cP

NPSHa: --- ft

Temperature: 60 °F

Vapor pressure: 0.2563 psi a

Atm pressure: 14.7 psi a

Motor:

Standard: NEMA

Enclosure: TEFC

--- hp

Speed: ---

Frame: ---

Sizing criteria: Max Power on Design Curve

Pump Limits:

Temperature: --- °F


Pressure: --- psi g

Sphere size: --- in

Power: --- hp

Eye area: --- in²

---- Data Point ----	
Flow:	6034 US gpm
Head:	7.21 ft
Eff:	84.1%
Power:	13.1 hp
NPSHr:	12.3 ft
---- Design Curve ----	
Shutoff head:	9.78 ft
Shutoff dP:	4.23 psi
Min flow:	--- US gpm
BEP:	84.1% @ 6034 US gpm
NOL power:	15.6 hp @ 4588 US gpm
-- Max Curve --	
Max power:	15.6 hp @ 4588 US gpm

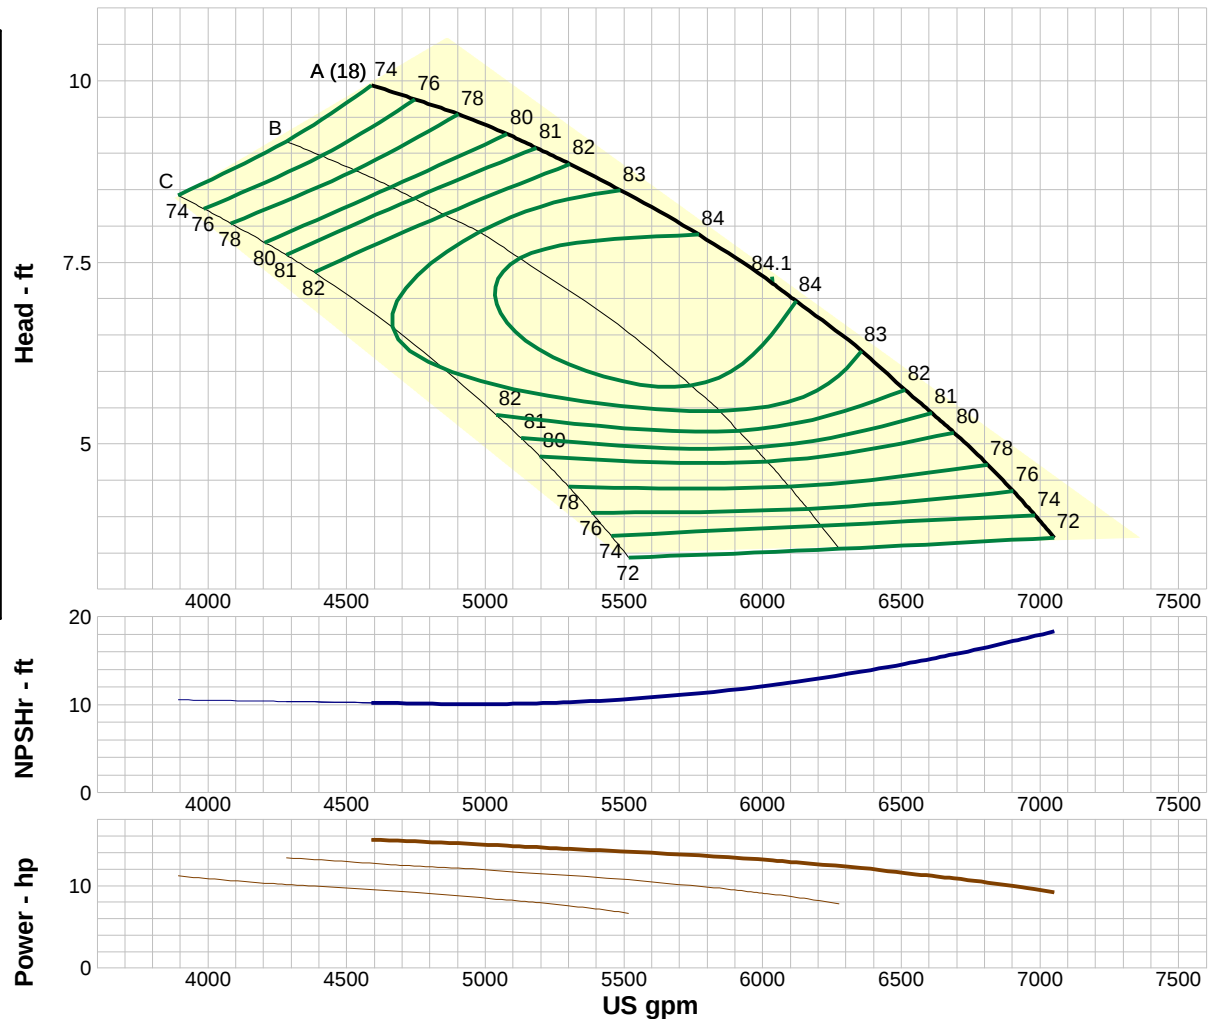

The performance is guaranteed for the design point only when pumping clean water at 85 degrees F. Consult factory for certified performance curve.

Performance Evaluation:

Flow US gpm	Speed rpm	Head ft	Efficiency %	Power hp	NPSHr ft
6768	705	4.87	78.7	10.6	16.3
5640	705	8.16	83.5	13.9	11
4512	705	---	---	---	---
3384	705	---	---	---	---
2256	705	---	---	---	---