GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER

PROJECT	SERVICE	GPM CAPACITY	FT. TDH	% EFFICIENCY	RPM

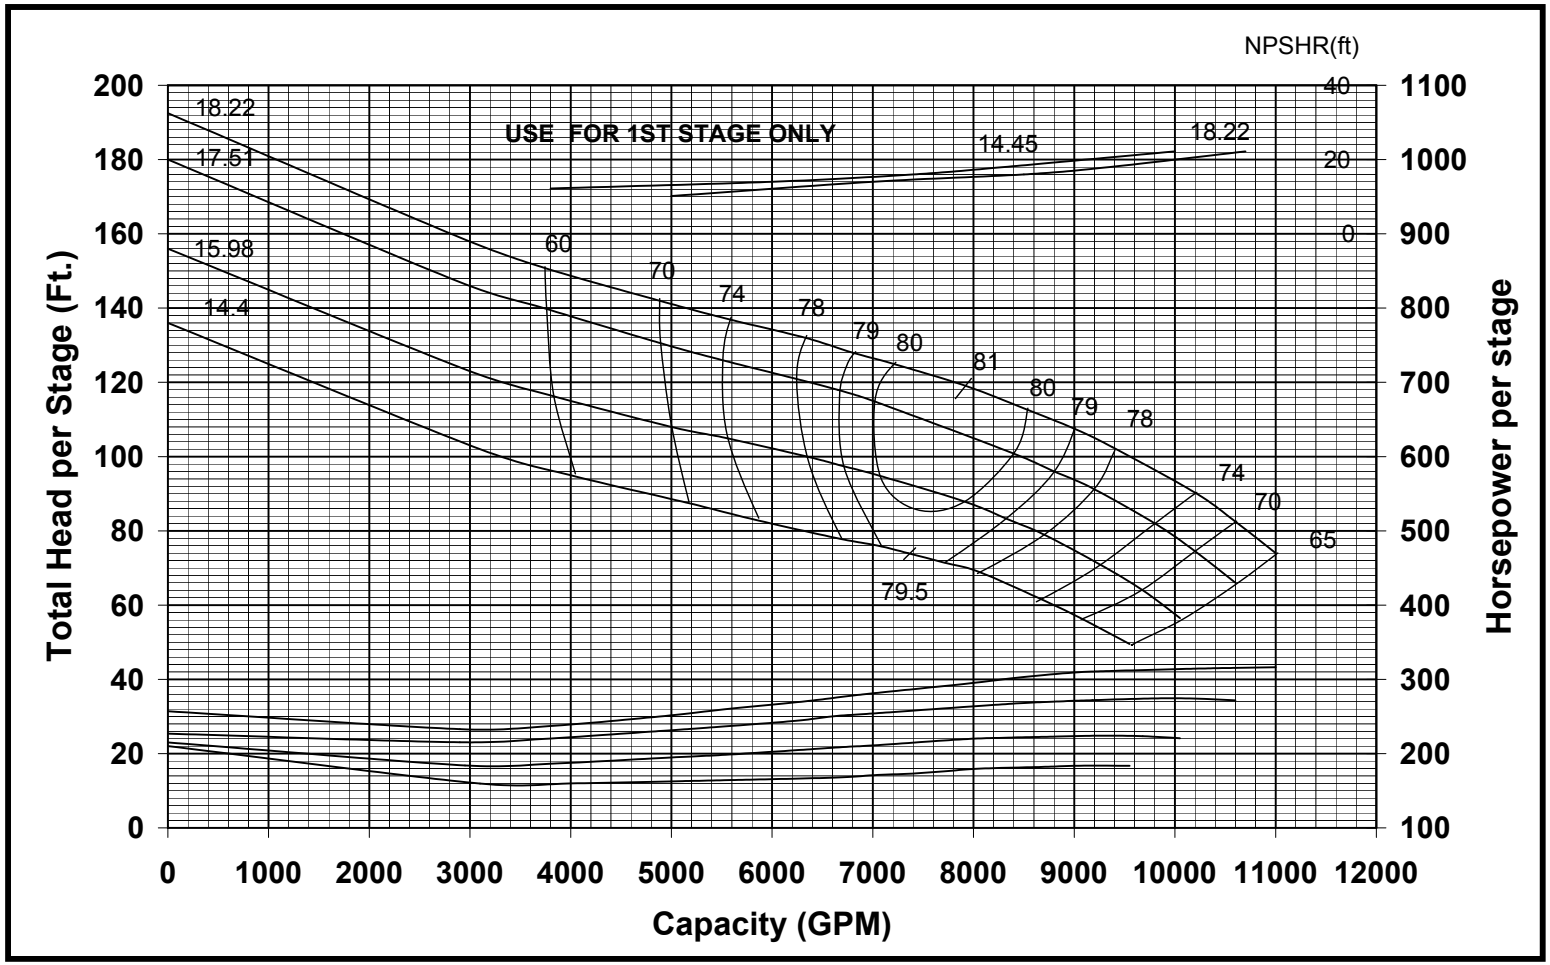

Curve No.
E6624DMPC0

Model 24DX

RPM 1180

EFFIEIENCY CORRECTION	
1-STAGE	
2-STAGE	
3-STAGE	
Bal. Imps.	-1.0

Impeller **ENCLOSED**

Ns = **2912**

K = **59.2 LBS/FT**

K(Bal.)= **14.8 LBS/FT**

Bowl O.D.	24.25"
Bowl Lateral	1.15"
Max. PSI	256
Mim. Subm,	51"

GOULDS PUMPS

TURBINE OPERATIONS
Lubbock, Texas

BOWL PERFORMANCE CURVE BASED ON PUMPING CLEAR, NON-AERATED WATER. RATED POINT ONLY IS GUARATEED. CURVES REPRESENT SINGLE STAGE PERFORMANCE BASED ON TEST OF MULTI-STAGE BOWL ASSEMBLY. EFFICIENCY CORRECTION IS REQUIRED FOR LESSER STAGES.

8/6/2003