GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER

PROJECT	SERVICE	GPM CAPACITY	FT. TDH	% EFFICIENCY	RPM

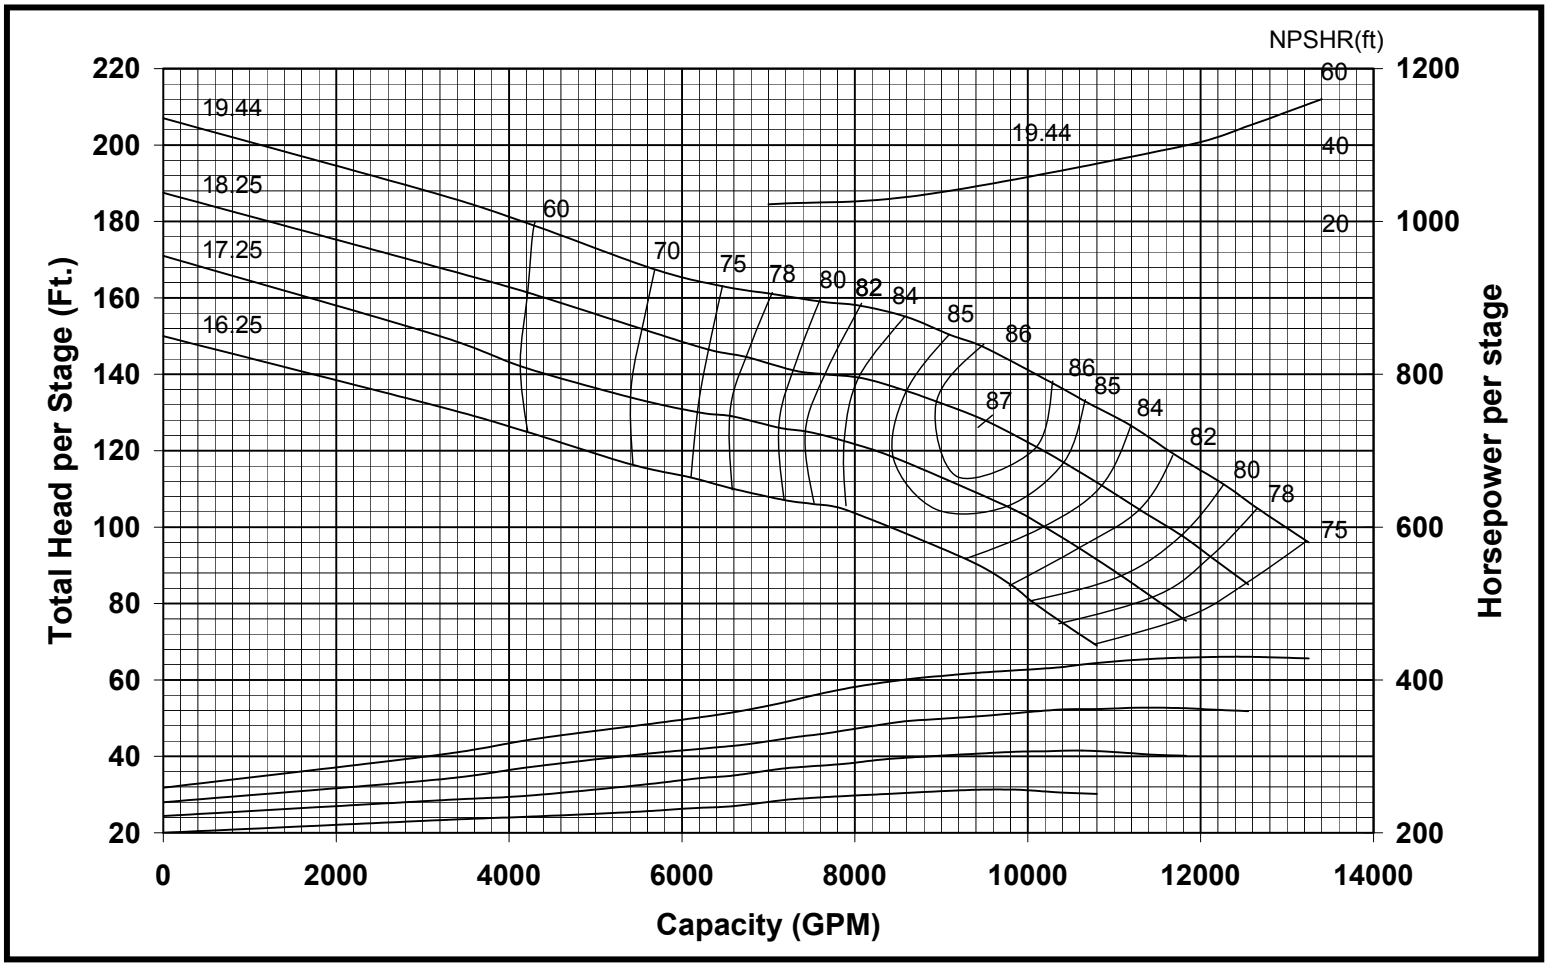

Curve No.
E6628BBPC0

Model **28BHC**

RPM **1180**

EFFIEIENCY CORRECTION	
1-STAGE	-1.0
2-STAGE	
3-STAGE	
Bal. Imps.	-2.0

Impeller **ENCLOSED**

Ns = **2836**

K = **68.5 LBS/FT**

K(Bal.)= **17.1 LBS/FT**

Bowl O.D.	26.80"
Bowl Lateral	0.87"
Max. PSI	285
Mim. Subm,	56"

GOULDS PUMPS

TURBINE OPERATIONS
Lubbock, Texas

BOWL PERFORMANCE CURVE BASED ON PUMPING CLEAR, NON-AERATED WATER. RATED POINT ONLY IS GUARATEED. CURVES REPRESENT SINGLE STAGE PERFORMANCE BASED ON TEST OF MULTI-STAGE BOWL ASSEMBLY. EFFICIENCY CORRECTION IS REQUIRED FOR LESSER STAGES.

8/6/2003