


GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER
PROJECT		SERVICE		GPM CAPACITY	FT. TDH	% EFFICIENCY
						RPM

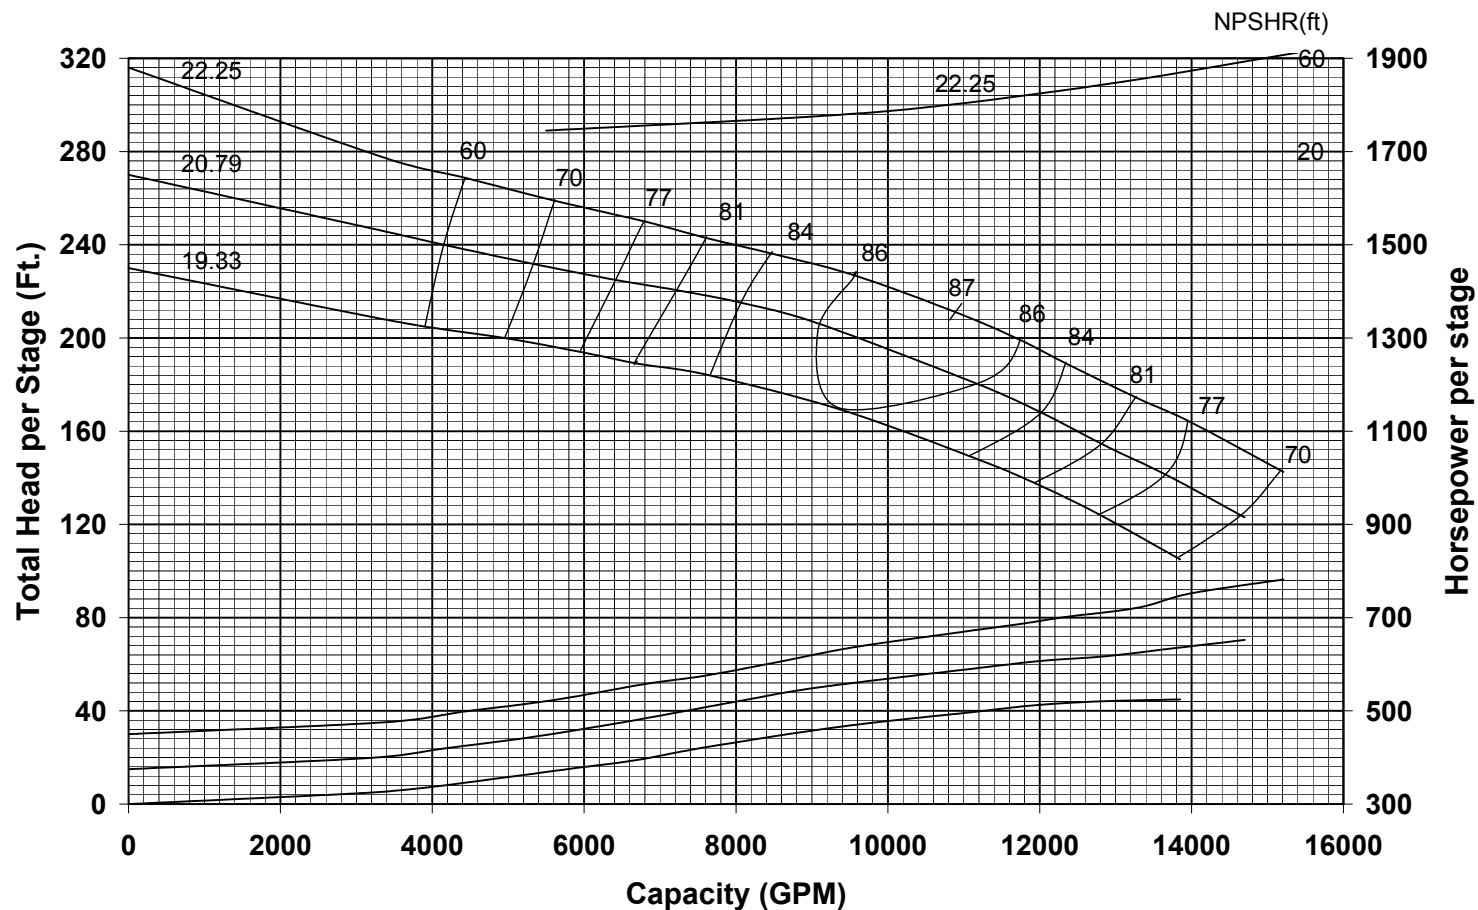

Curve No. E6628CCPC1	
Model 28CHC	
RPM 1180	
EFFICIENCY CORRECTION	
1-STAGE	-1.5
2-STAGE	
3-STAGE	
Bal. Imps.	-1.0
Impeller ENCLOSED	
Ns = 2232	
K = 51.4 LBS/FT	
K(Bal.)= 12.9 LBS/FT	
Bowl O.D.	29.12"
Bowl Lateral	1.00"
Max. PSI	200
Mim. Subm.	60"
GOULDS PUMPS	
TURBINE OPERATIONS	
Lubbock, Texas	
BOWL PERFORMANCE CURVE BASED ON PUMPING CLEAR, NON-AERATED WATER. RATED POINT ONLY IS GUARANTEED. CURVES REPRESENT SINGLE STAGE PERFORMANCE BASED ON TEST OF MULTI-STAGE BOWL ASSEMBLY. EFFICIENCY CORRECTION IS REQUIRED FOR LESSER STAGES.	