


- PER STAGE
 - TOTAL HEAD
 - TOTAL HEAD
 CAPACITY
 U.S. GPM
 CU. METRES
 PER HR.

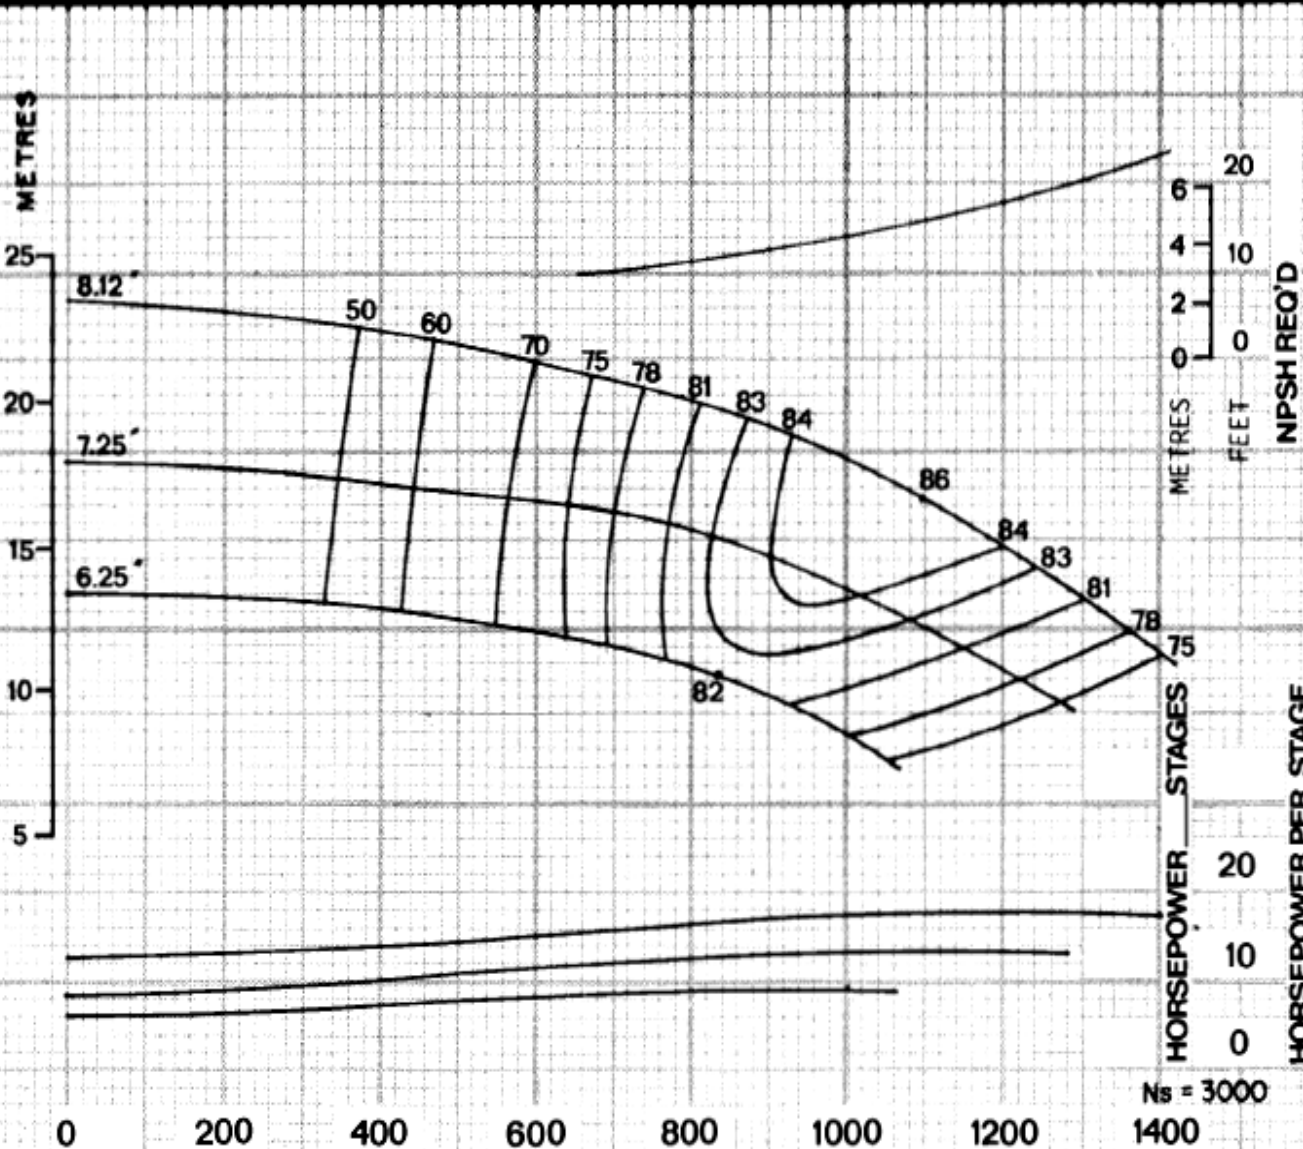

Curve No. 1114

Size: 12 JMO

RPM: 1760

EFFICIENCY CHANGE

STGS.	1	-3.0
	2	-1.5
	3	-1.0

PERF. BASED ON:
 BRZ. IMPELLERS &
 C.I. VITRIGLASS
 ENAMELLED BOWLS

Impeller = OPEN

K = 13.7 Lbs./Ft.
 20.4 Kg./M.

K(Bal.) =



Characteristic based
 upon pumping clear,
 non-aerated water.
 Rating point only is
 guaranteed. Column
 losses not included.

PAGE
 5C45
 DATE
 July 22, 1977
 SUPERSEDES
 New