GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER

PROJECT	SERVICE	GPM CAPACITY	FT. TDH	% EFFICIENCY	RPM

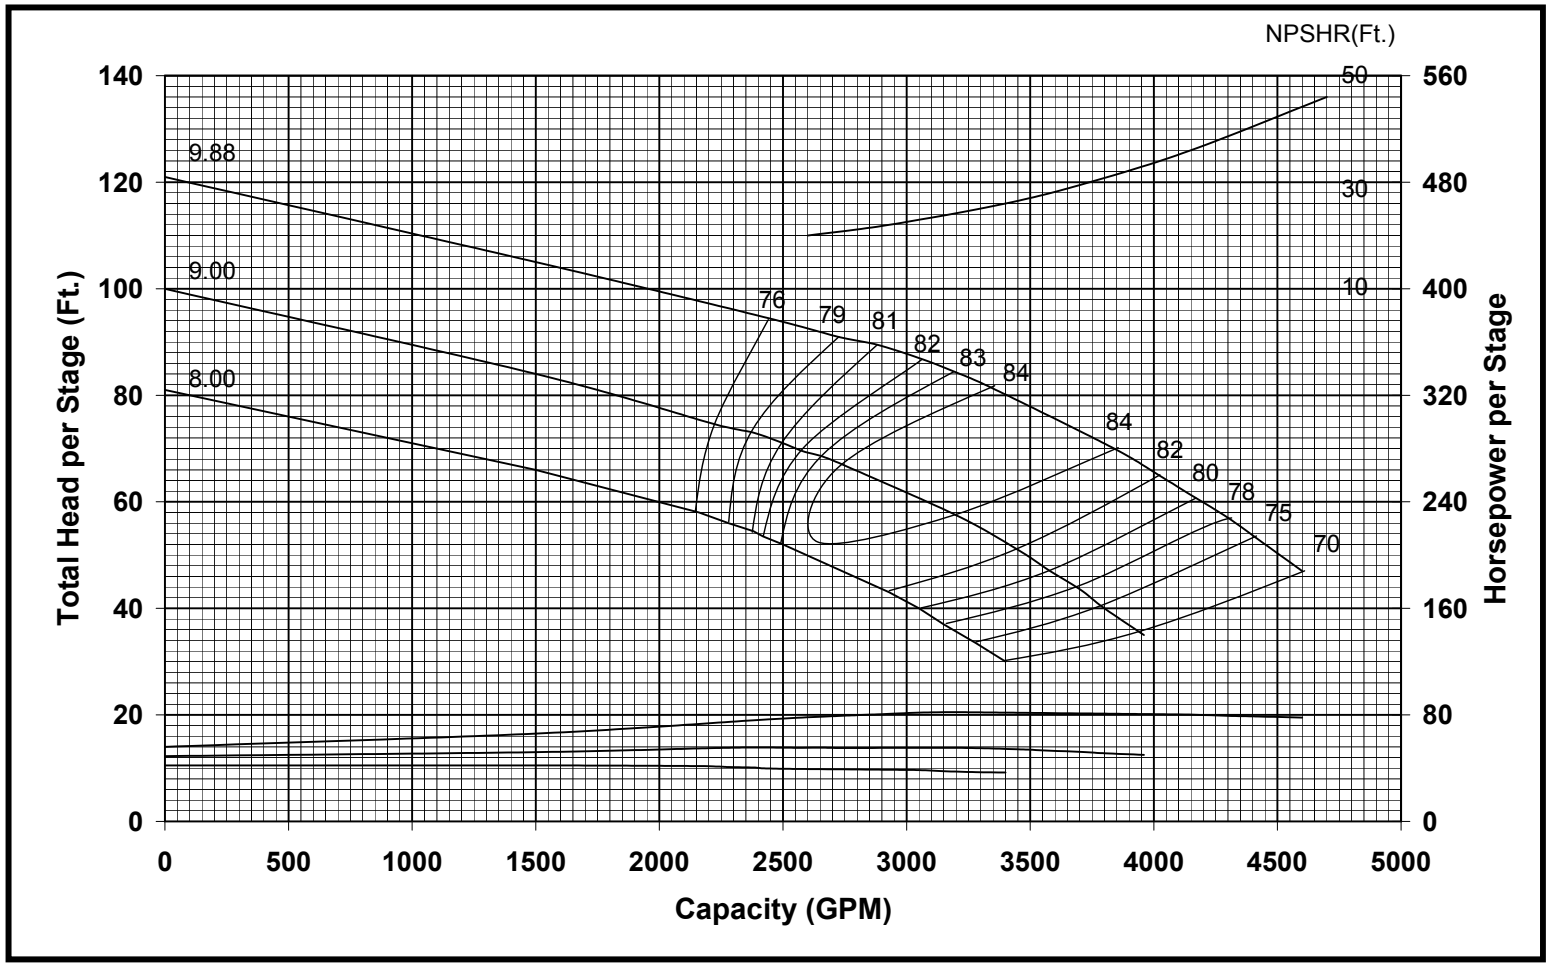

Curve No.	**E6414FAPC0**
Model	**14FHC**
RPM	**1770**
EFFIEIENCY CORRECTION	
1-STAGE	-2.0
2-STAGE	-1.0
3-STAGE	-0.5
4-STAGE	0.0
Impeller	**ENCLOSED**
Ns =	**4000**
K =	**17 LBS/FT**
K(Bal.)=	**N/A**
Bowl O.D.	14.00"
Bowl Lateral	1.00"
Max. PSI	330
Disch size	10", 12"

GOULDS PUMPS

TURBINE OPERATIONS

Lubbock, Texas

BOWL PERFORMANCE CURVE BASED ON PUMPING CLEAR, NON-AERATED WATER. RATED POINT ONLY IS GUARATEED. CURVES REPRESENT SINGLE STAGE PERFORMANCE BASED ON TEST OF MULTI-STAGE BOWL ASSEMBLY. EFFICIENCY CORRECTION IS REQUIRED FOR LESSER STAGES.

8/26/2003