


GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER
PROJECT		SERVICE		GPM CAPACITY		FT. TDH
						% EFFICIENCY
						RPM

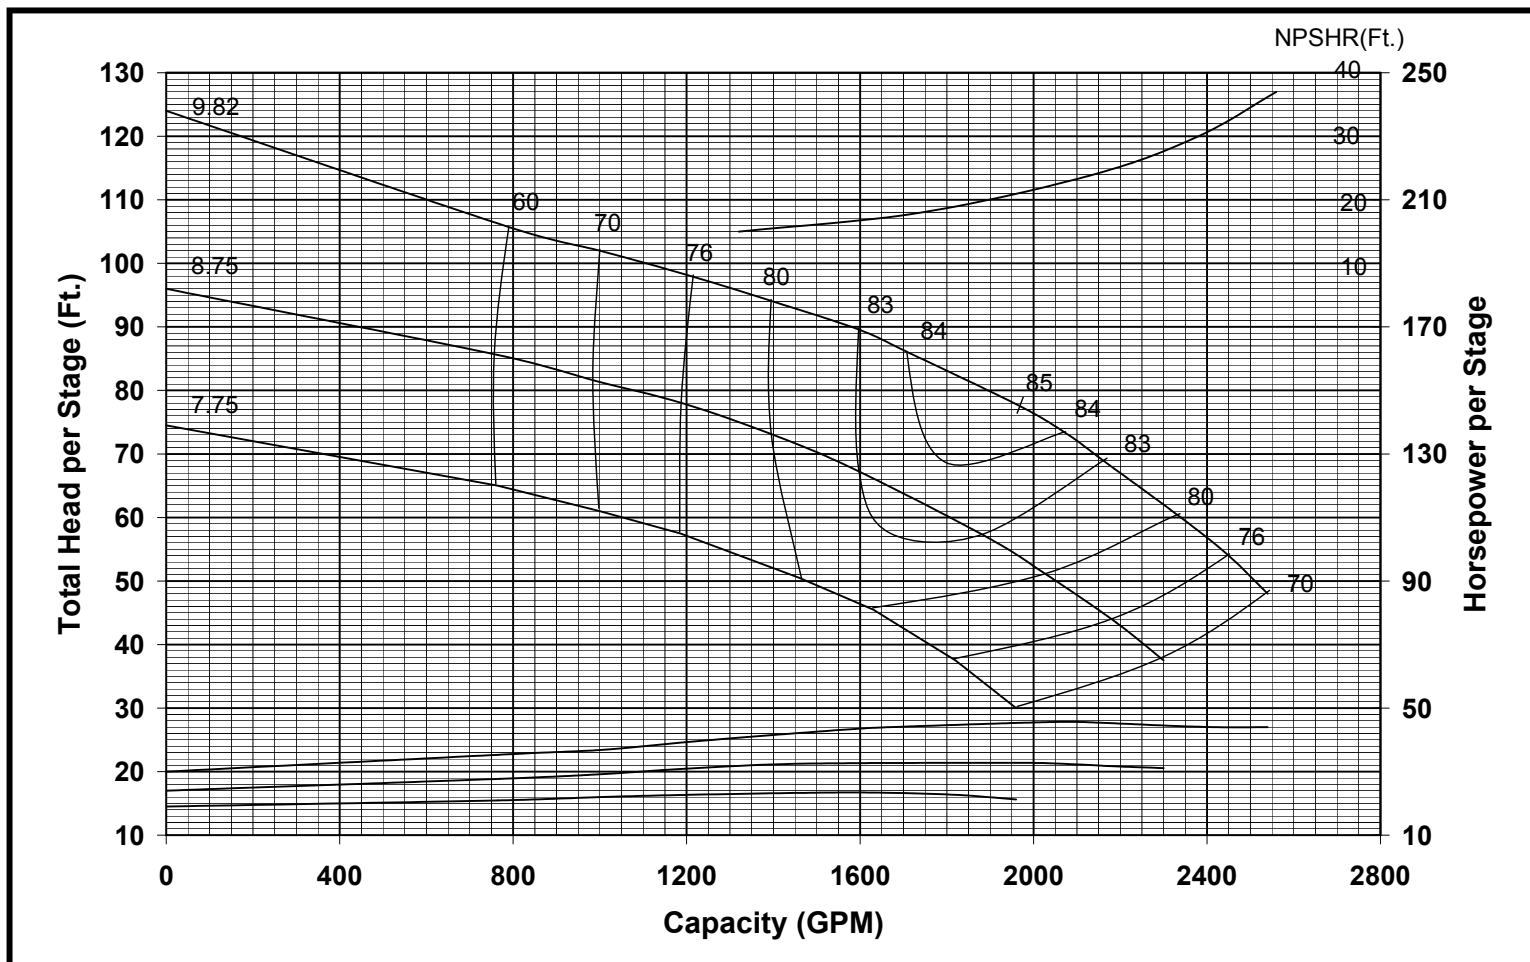

Curve No. E6414RGPC2	
Model 14RJMC	
RPM 1770	
EFFICIENCY CORRECTION	
1-STAGE	0.0
2-STAGE	
3-STAGE	
4-STAGE	
Impeller ENCLOSED	
Ns = 2990	
K = 10.0 LBS/FT	
K(Bal.)= N/A	
Bowl O.D.	13.63"
Bowl Lateral	1.00"
Max. PSI	340
Disch size	8", 10", 12"
GOULDS PUMPS	
TURBINE OPERATIONS	
Lubbock, Texas	
BOWL PERFORMANCE CURVE BASED ON PUMPING CLEAR, NON-AERATED WATER. RATED POINT ONLY IS GUARANTEED. CURVES REPRESENT SINGLE STAGE PERFORMANCE BASED ON TEST OF MULTI-STAGE BOWL ASSEMBLY. EFFICIENCY CORRECTION IS REQUIRED FOR LESSER STAGES.	