


GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER		
PROJECT			SERVICE		GPM CAPACITY	F.T. TDH	% EFFICIENCY	RPM

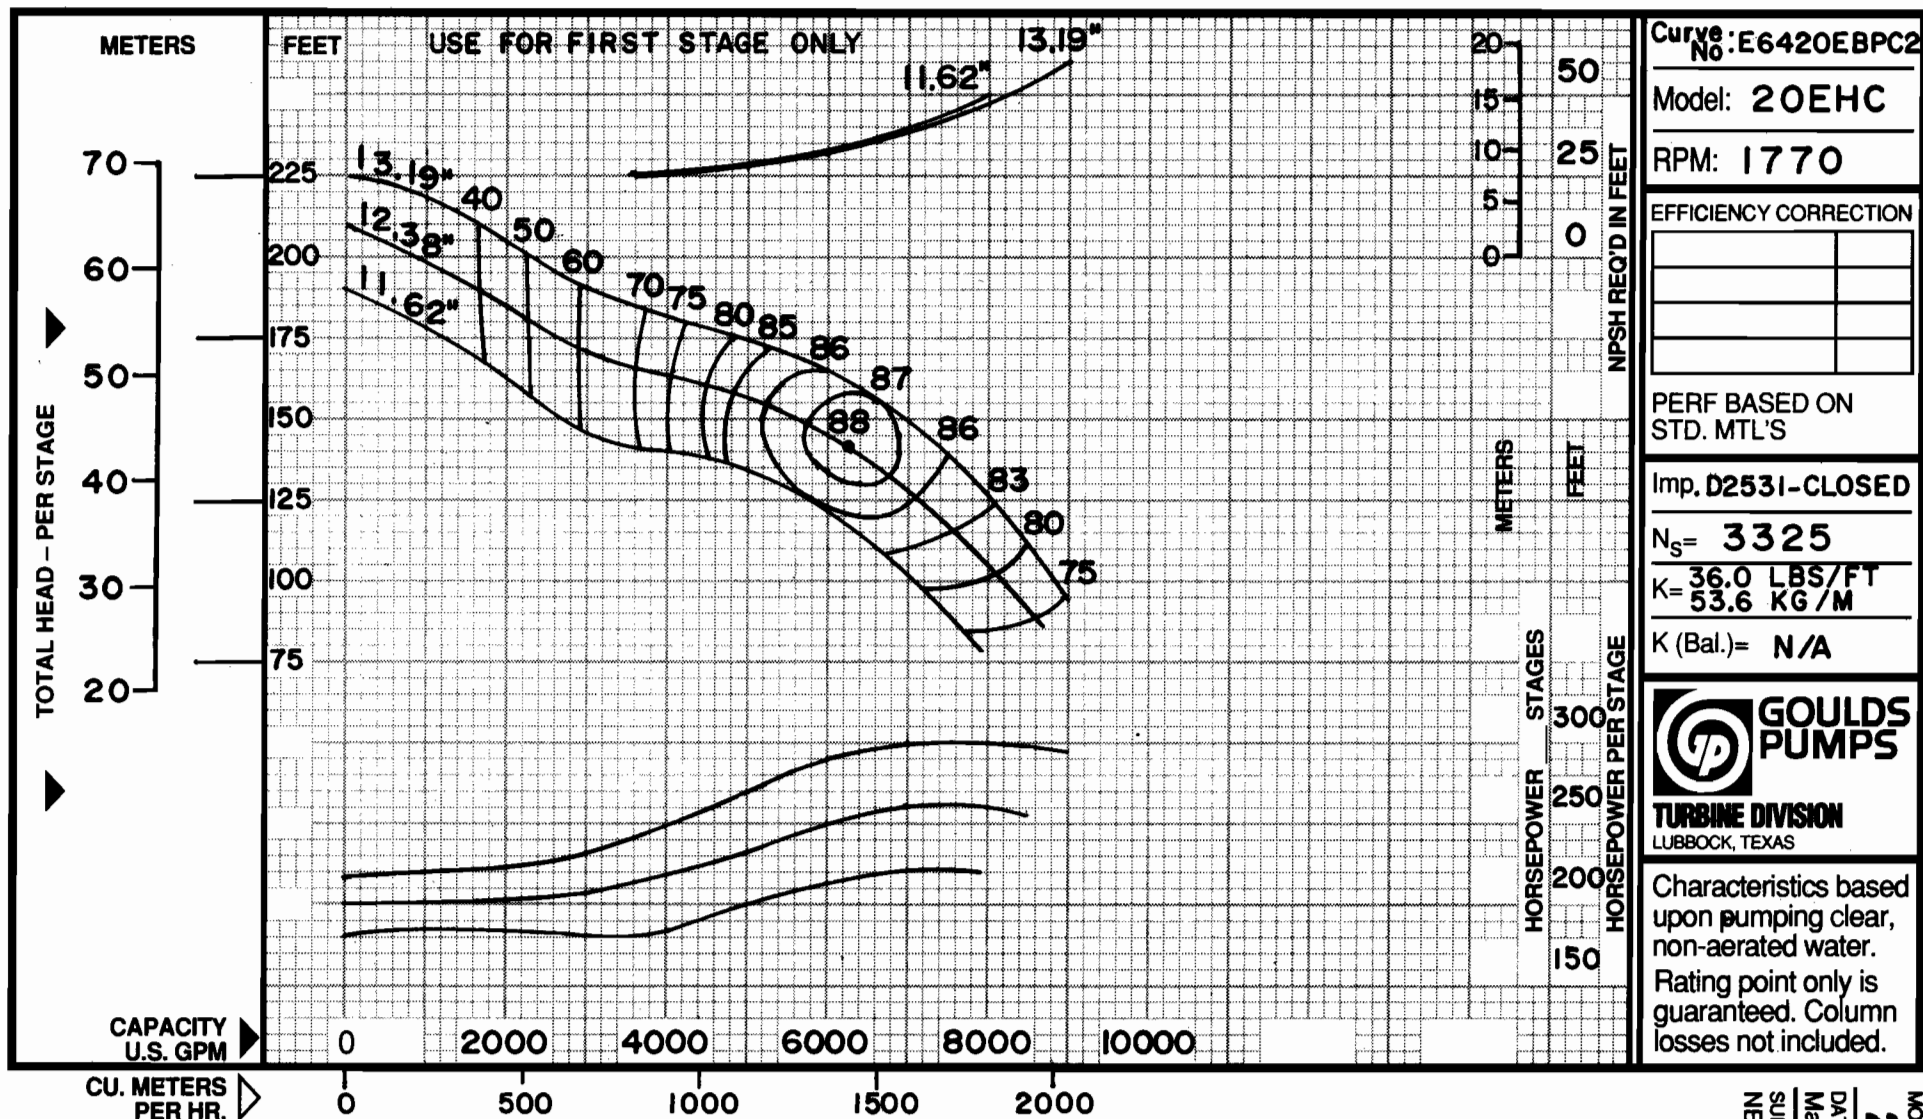

Curve No: E6420EBPC2

Model: 20EHC

RPM: 1770

EFFICIENCY CORRECTION

PERF BASED ON STD. MTL'S

Imp. D2531-CLOSED

$N_s = 3325$

$K = \frac{36.0 \text{ LBS/FT}}{53.6 \text{ KG/M}}$

$K (\text{Bal.}) = \text{N/A}$



TURBINE DIVISION
LUBBOCK, TEXAS

Characteristics based upon pumping clear, non-aerated water. Rating point only is guaranteed. Column losses not included.

MODEL

20EHC/1ST

DATE

March 1995

SUPERCEDES

NEW

C20EHC/1ST.1