


- PER STAGE -
 TOTAL HEAD
 STAGES
 TOTAL HEAD
 CAPACITY
 U.S. GPM
 CU. METRES
 PER HR.

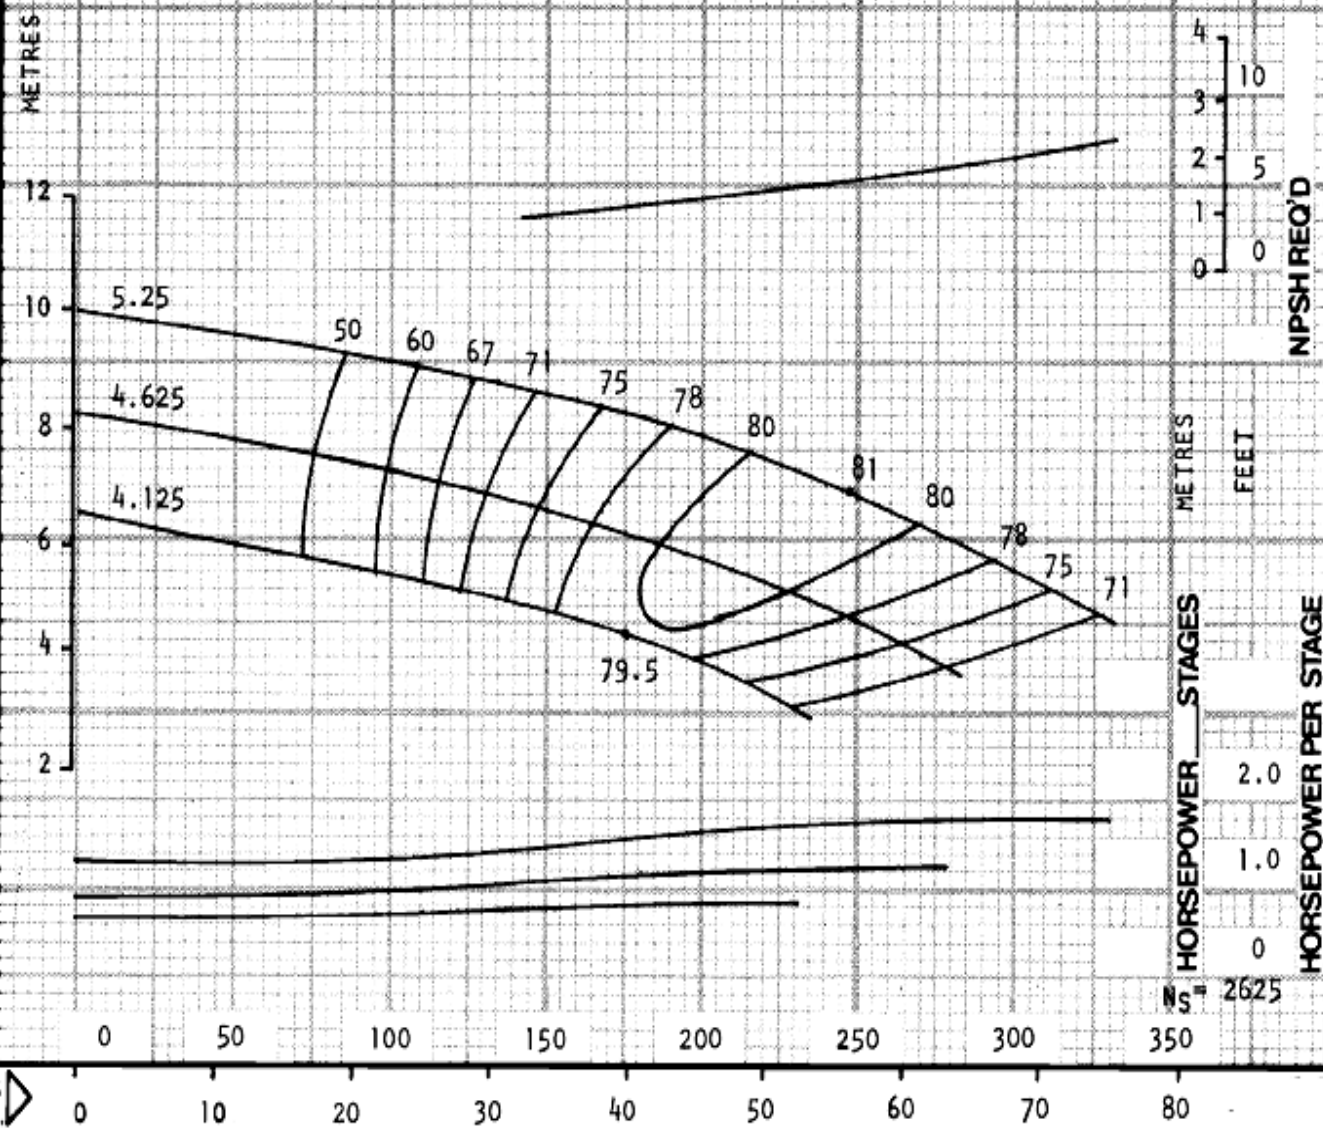

Curve No. 1139
 Size: 8JL0
 RPM: 1760

EFFICIENCY CHANGE

STGS.	1	4
"	2	2.5
"	3	1.5
"	4	1.0

Perf. based on:
 Brz. Impellers &
 C.I. Vitriglass
 Enamelled Bowls.

Impeller= OPEN
 K= 5.3 LBS./FT.
 7.9 Kg./M.
 K(Bal.)=



Characteristic based
 upon pumping clear,
 non-aerated water.
 Rating point only is
 guaranteed. Column
 losses not included.