GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER

PROJECT	SERVICE	GPM CAPACITY	FT. TDH	% EFFICIENCY	RPM

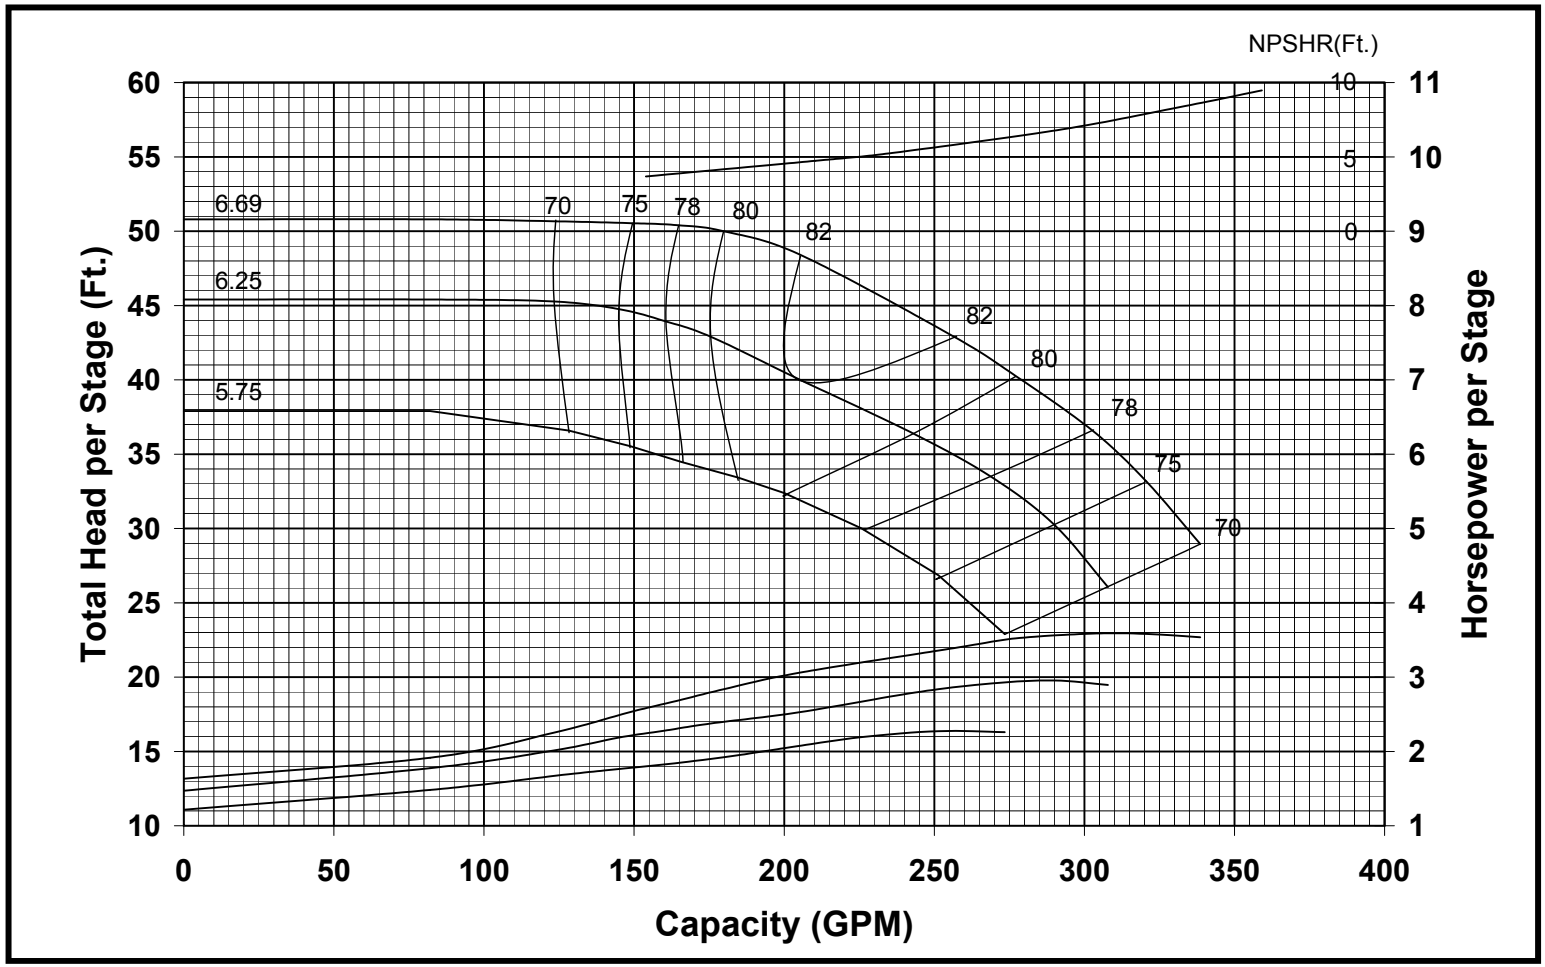

Curve No.
E6409WAPC1

Model **9WAHC**

RPM **1770**

EFFIEIENCY CORRECTION	
1-STAGE	-2.0
2-STAGE	-1.0
3-STAGE	0.0
4-STAGE	0.0

Impeller **ENCLOSED**

Ns = **1530**

K = **3.75 LBS/FT**

K(Bal.)= **N/A**

Bowl O.D.	9.25"
Bowl Lateral	0.56"
Max. PSI	530
Disch size	5", 6", 8"

GOULDS PUMPS

TURBINE OPERATIONS
Lubbock, Texas

BOWL PERFORMANCE CURVE BASED ON PUMPING CLEAR, NON-AERATED WATER. RATED POINT ONLY IS GUARATEED. CURVES REPRESENT SINGLE STAGE PERFORMANCE BASED ON TEST OF MULTI-STAGE BOWL ASSEMBLY. EFFICIENCY CORRECTION IS REQUIRED FOR LESSER STAGES.

9/28/2003