


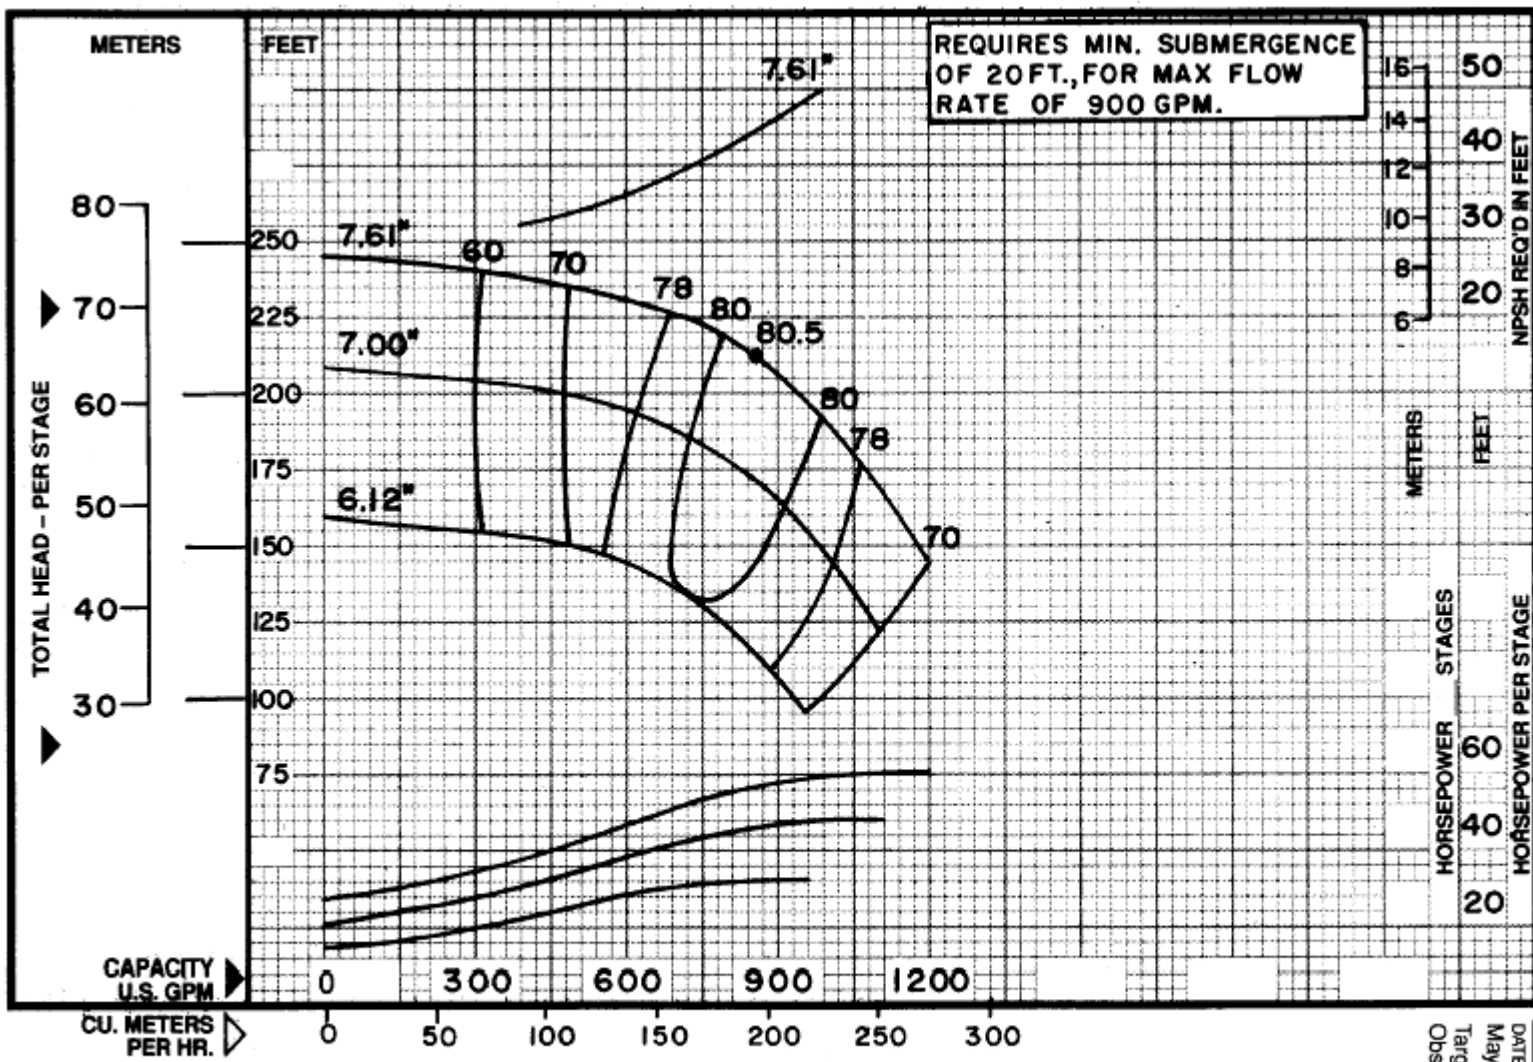

REQUIRES MIN. SUBMERGENCE
OF 20FT., FOR MAX FLOW
RATE OF 900 GPM.

Curve No. 3008

Model: 10IHC

RPM: 3500

EFFICIENCY CORRECTION

PERF BASED ON
STD. MTL'S

Impeller= B00955B

N_s= 1890

K= 4.5 LBS/FT
6.69 KG/M

K (Bal.)=



Characteristics based
upon pumping clear,
non-aerated water.
Rating point only is
guaranteed. Column
losses not included.

MODEL
10IHC

DATE
May 2, 1988
Targeted for
Obsolescence