GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER

PROJECT	SERVICE	GPM CAPACITY	FT. TDH	% EFFICIENCY	RPM

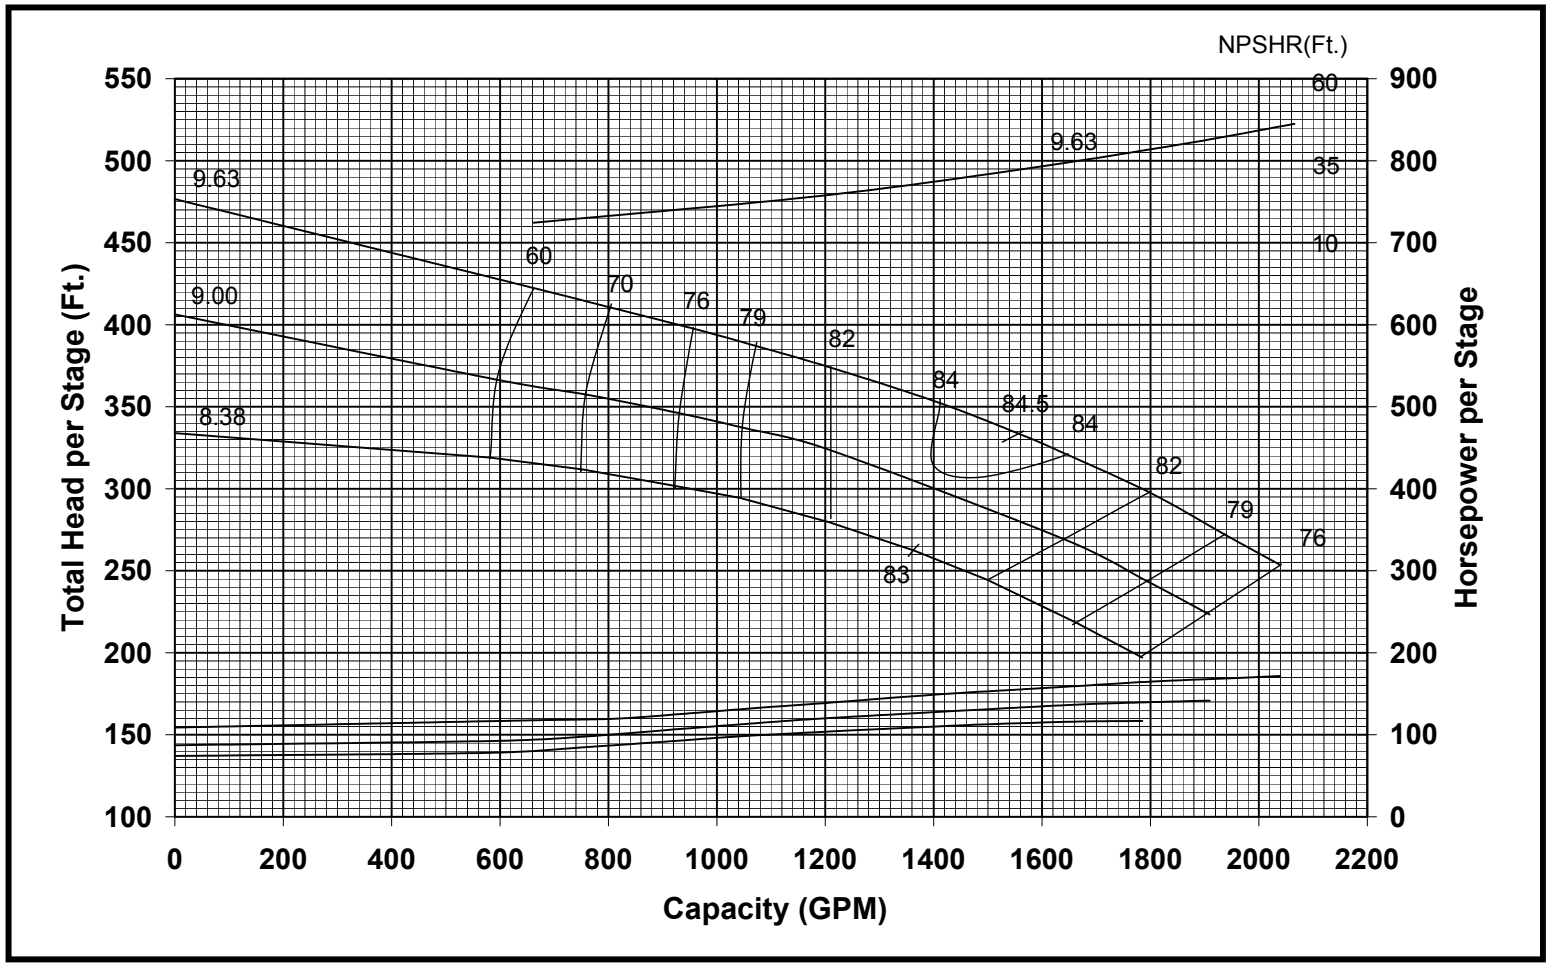

Curve No.	**E6213AAPC4**
Model	**13RAHC**
RPM	**3550**
EFFIEIENCY CORRECTION	
1-STAGE	-5.0
2-STAGE	-2.0
3-STAGE	-1.0
4-STAGE	0.0
Impeller	**ENCLOSED**
Ns =	**1790**
K =	**7.9 LBS/FT**
K(Bal.)=	**N/A**
Bowl O.D.	13.38"
Bowl Lateral	0.50"
Max. PSI	430
Disch size	8",10",12"

GOULDS PUMPS

TURBINE OPERATIONS

Lubbock, Texas

BOWL PERFORMANCE CURVE BASED ON PUMPING CLEAR, NON-AERATED WATER. RATED POINT ONLY IS GUARATEED. CURVES REPRESENT SINGLE STAGE PERFORMANCE BASED ON TEST OF MULTI-STAGE BOWL ASSEMBLY. EFFICIENCY CORRECTION IS REQUIRED FOR LESSER STAGES.

8/8/2003