


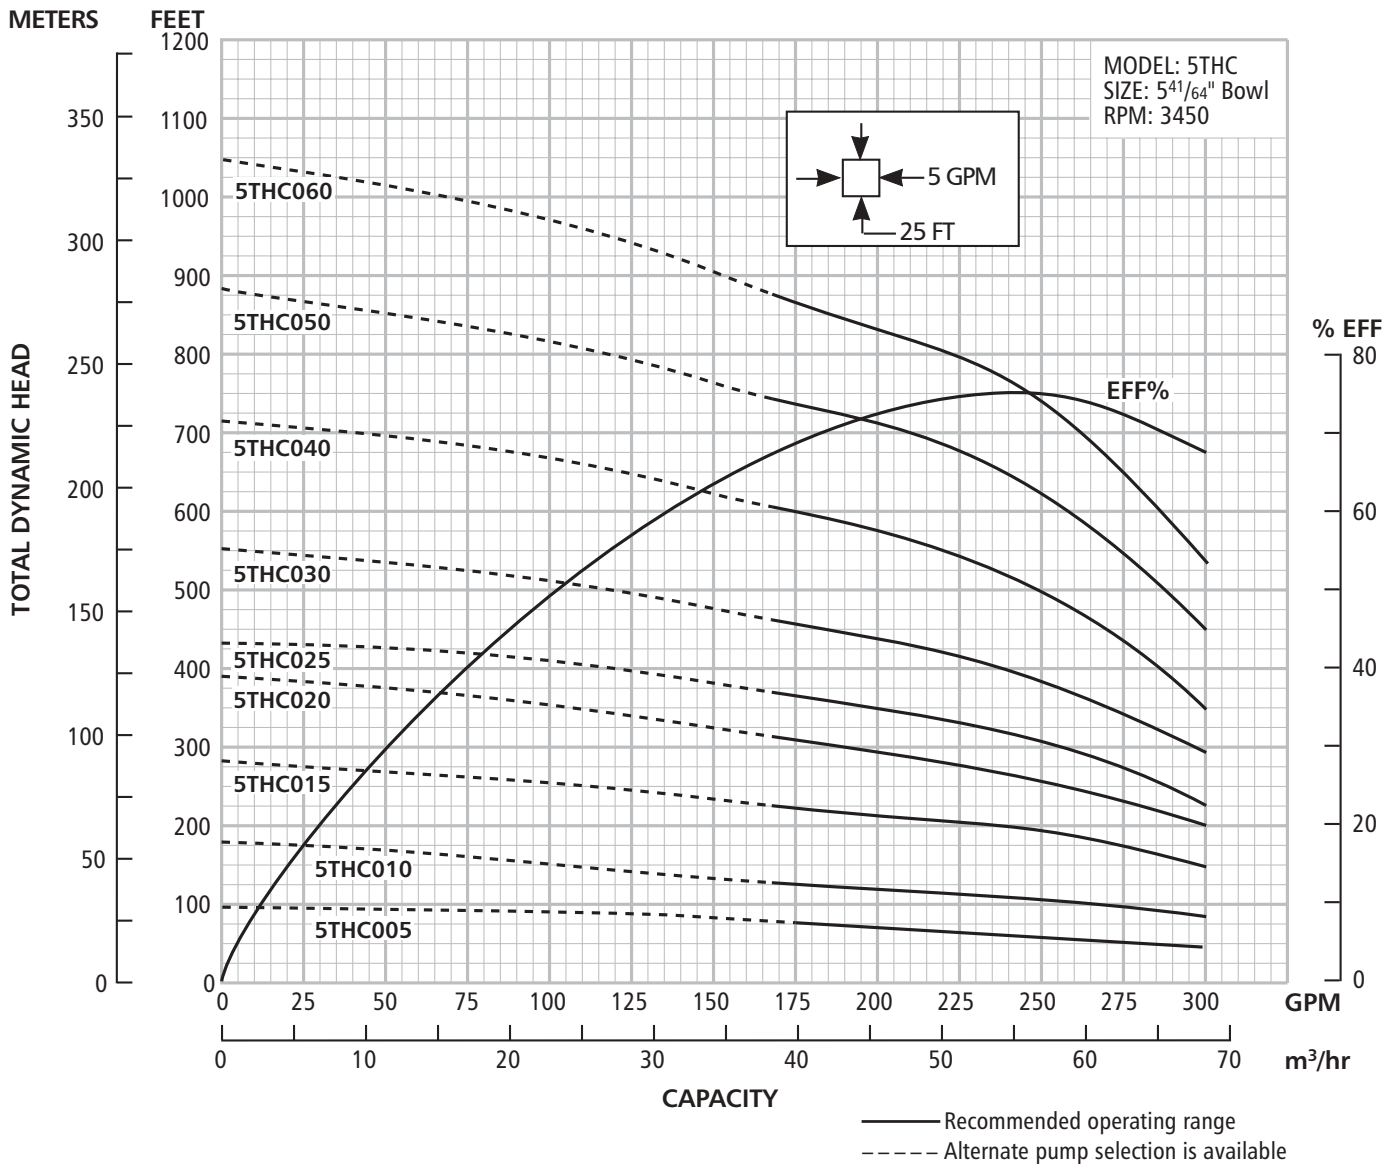

DIMENSIONS AND WEIGHTS


HP	Stages	W.E. Order Number	W.E. Length	W.E. Wt. (lbs.)
5	2	05THC00544CTB	20.9	60
		05THC00564CTB	23.3	62
10	3	05THC01064CTB	28.0	75
15	5	05THC01564CTB	37.6	101
20	7	05THC02064CTB	47.3	127
25	8	05THC02564CTB	52.0	153
30	10	05THC03064CTB	61.7	166
40	13	05THC04064CTB	76.0	218
50	16	05THC05064CTB	90.6	257
60	19	05THC06064CTB	105.0	296

(All dimensions in inches and weights in lbs. Do not use for construction purposes.)

PLEASE NOTE:

- Order motors separately.
- For intermediate horsepower pumps consult factory.
- Solid line is recommended operating range. The dotted line (---) signifies an alternate pump selection is available.
- Please specify all options changes in W.E. order number.

4" NPT DISCHARGE CONNECTION

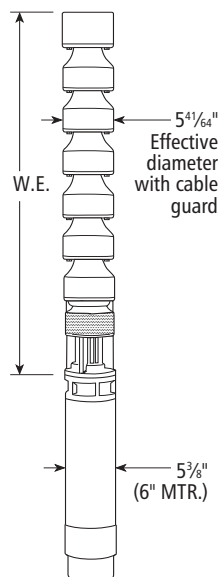

MATERIALS OF CONSTRUCTION

Part Name	Material
Shaft	ASTM A582 TYPE 416
Coupling	ASTM A582 S41600 CD
Suction Adapter	Ductile Iron ASTM A536
Discharge Bowl	ASTM A48 CL 30B
Bronze Bearings	ASTM B584
Discharge Bowl Bearing	ASTM B584
Taperlocks	ASTM A108 GR 101B
Bowl	ASTM A48 CL 30B
Upthrust Collar	Polyethylene
Impeller	ASTM B584
Fasteners	SAEJ429 GR 8
Cable Guard	ASTM A240 S 30400
Suction Strainer	ASTM A240 S 30400

