


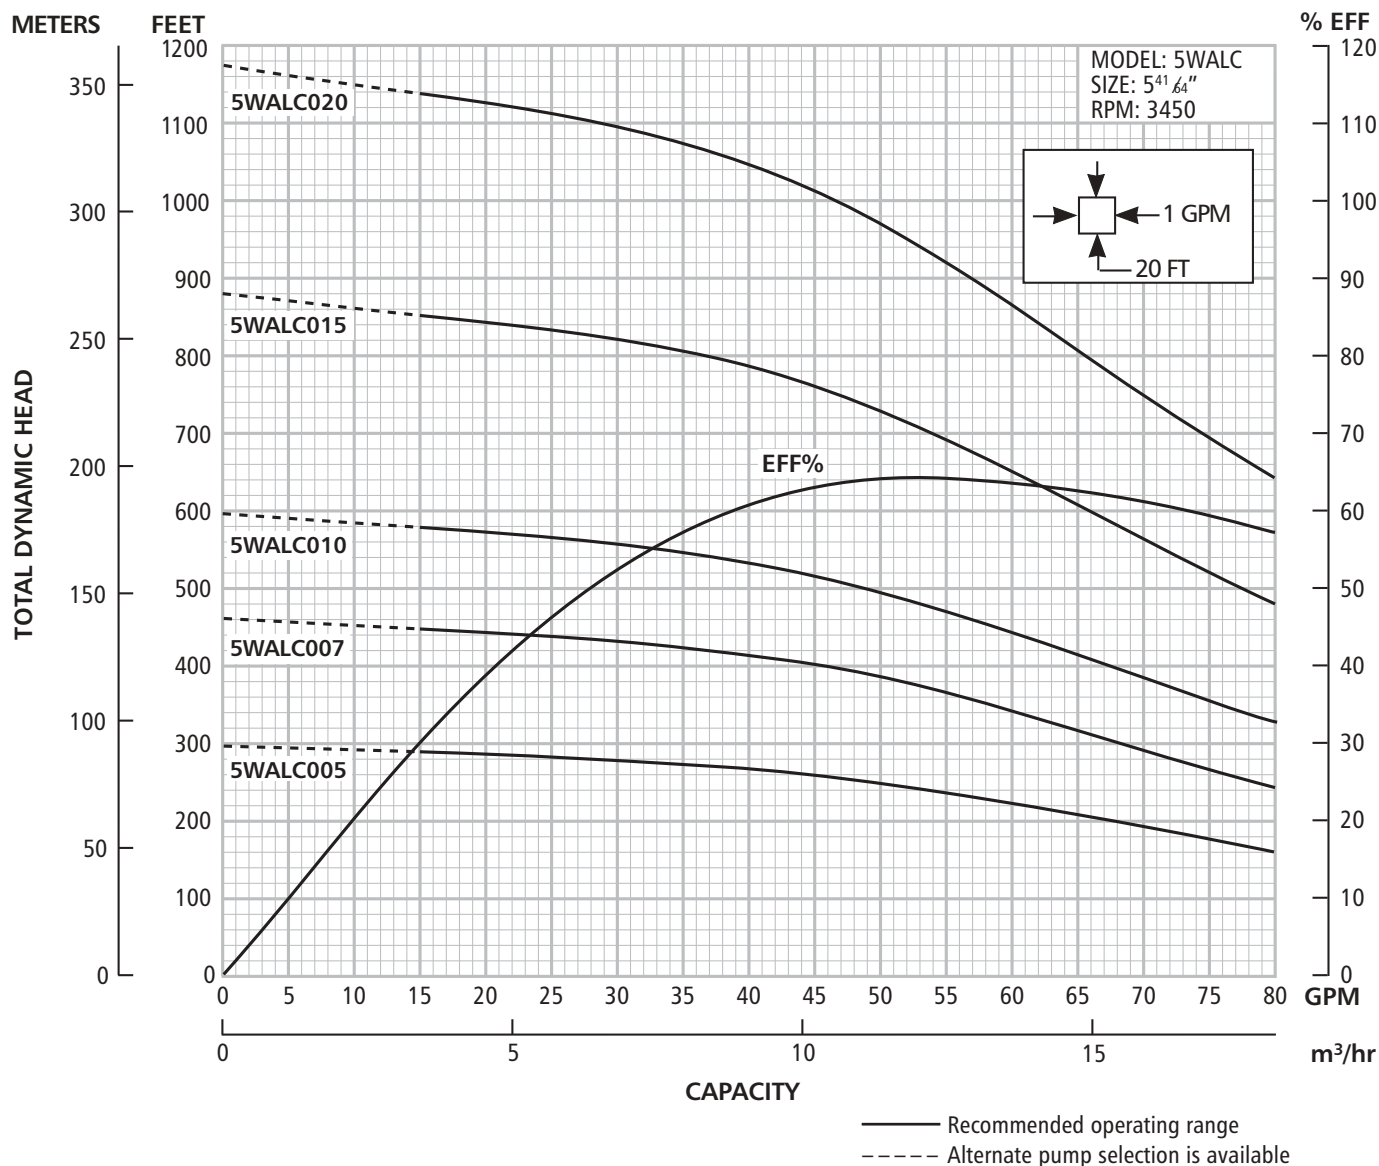

DIMENSIONS AND WEIGHTS


HP	Stages	W.E. Order Number	W.E. Length	W.E. Wt. (lbs.)
5	5	05WALC00544CTB	29.3	89
		05WALC00564CTB	31.4	97
7.5	8	05WALC00744CTB	41.3	125
		05WALC00764CTB	43.4	133
10	10	05WALC01064CTB	51.4	157
15	15	05WALC01564CTB	71.4	217
20	20	05WALC02064CTB	91.4	277

(All dimensions in inches and weights in lbs. Do not use for construction purposes.)

PLEASE NOTE:


- Order motors separately.
- For intermediate horsepower pumps consult factory.
- Solid line is recommended operating range. The dotted line (---) signifies an alternate pump selection is available.
- Please specify all options changes in W.E. order number.

4" NPT DISCHARGE CONNECTION

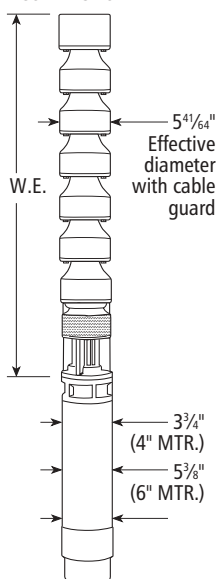

MATERIALS OF CONSTRUCTION

Part Name	Material
Shaft	ASTM A582 TYPE 416
Coupling	ASTM A582 S41600 CD
Suction Adapter	Ductile Iron ASTM A536
Discharge Bowl	ASTM A48 CL 30B
Bronze Bearings	ASTM B584
Discharge Bowl Bearing	ASTM B584
Taperlocks	ASTM A108 GR 101B
Bowl	ASTM A48 CL 30B
Upthrust Collar	Polyethylene
Impeller	ASTM B584
Fasteners	SAEJ429 GR 8
Cable Guard	ASTM A240 S 30400
Suction Strainer	ASTM A240 S 30400

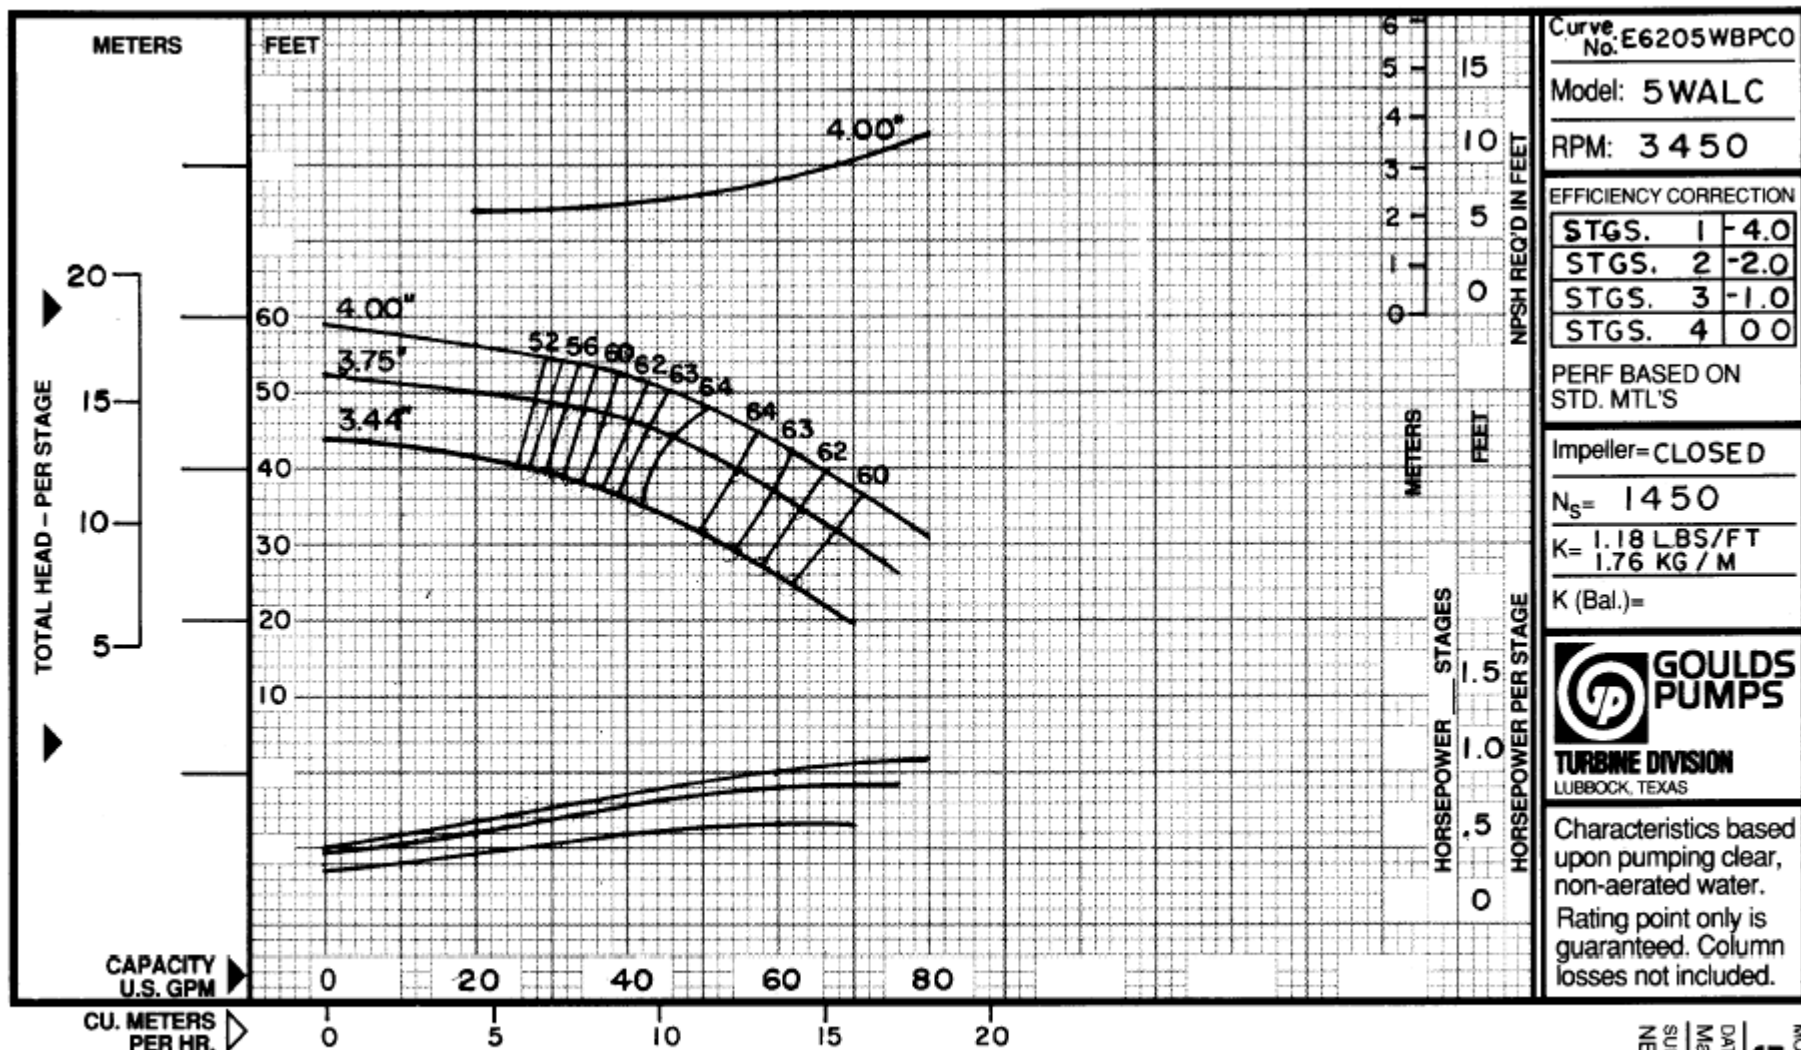

MODEL
5WALC
 DATE
 May 2000
 SUPERCEDES
 NEW