



GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER
PROJECT			SERVICE	GPM CAPACITY	F.T. TDH	% EFFICIENCY
						RPM

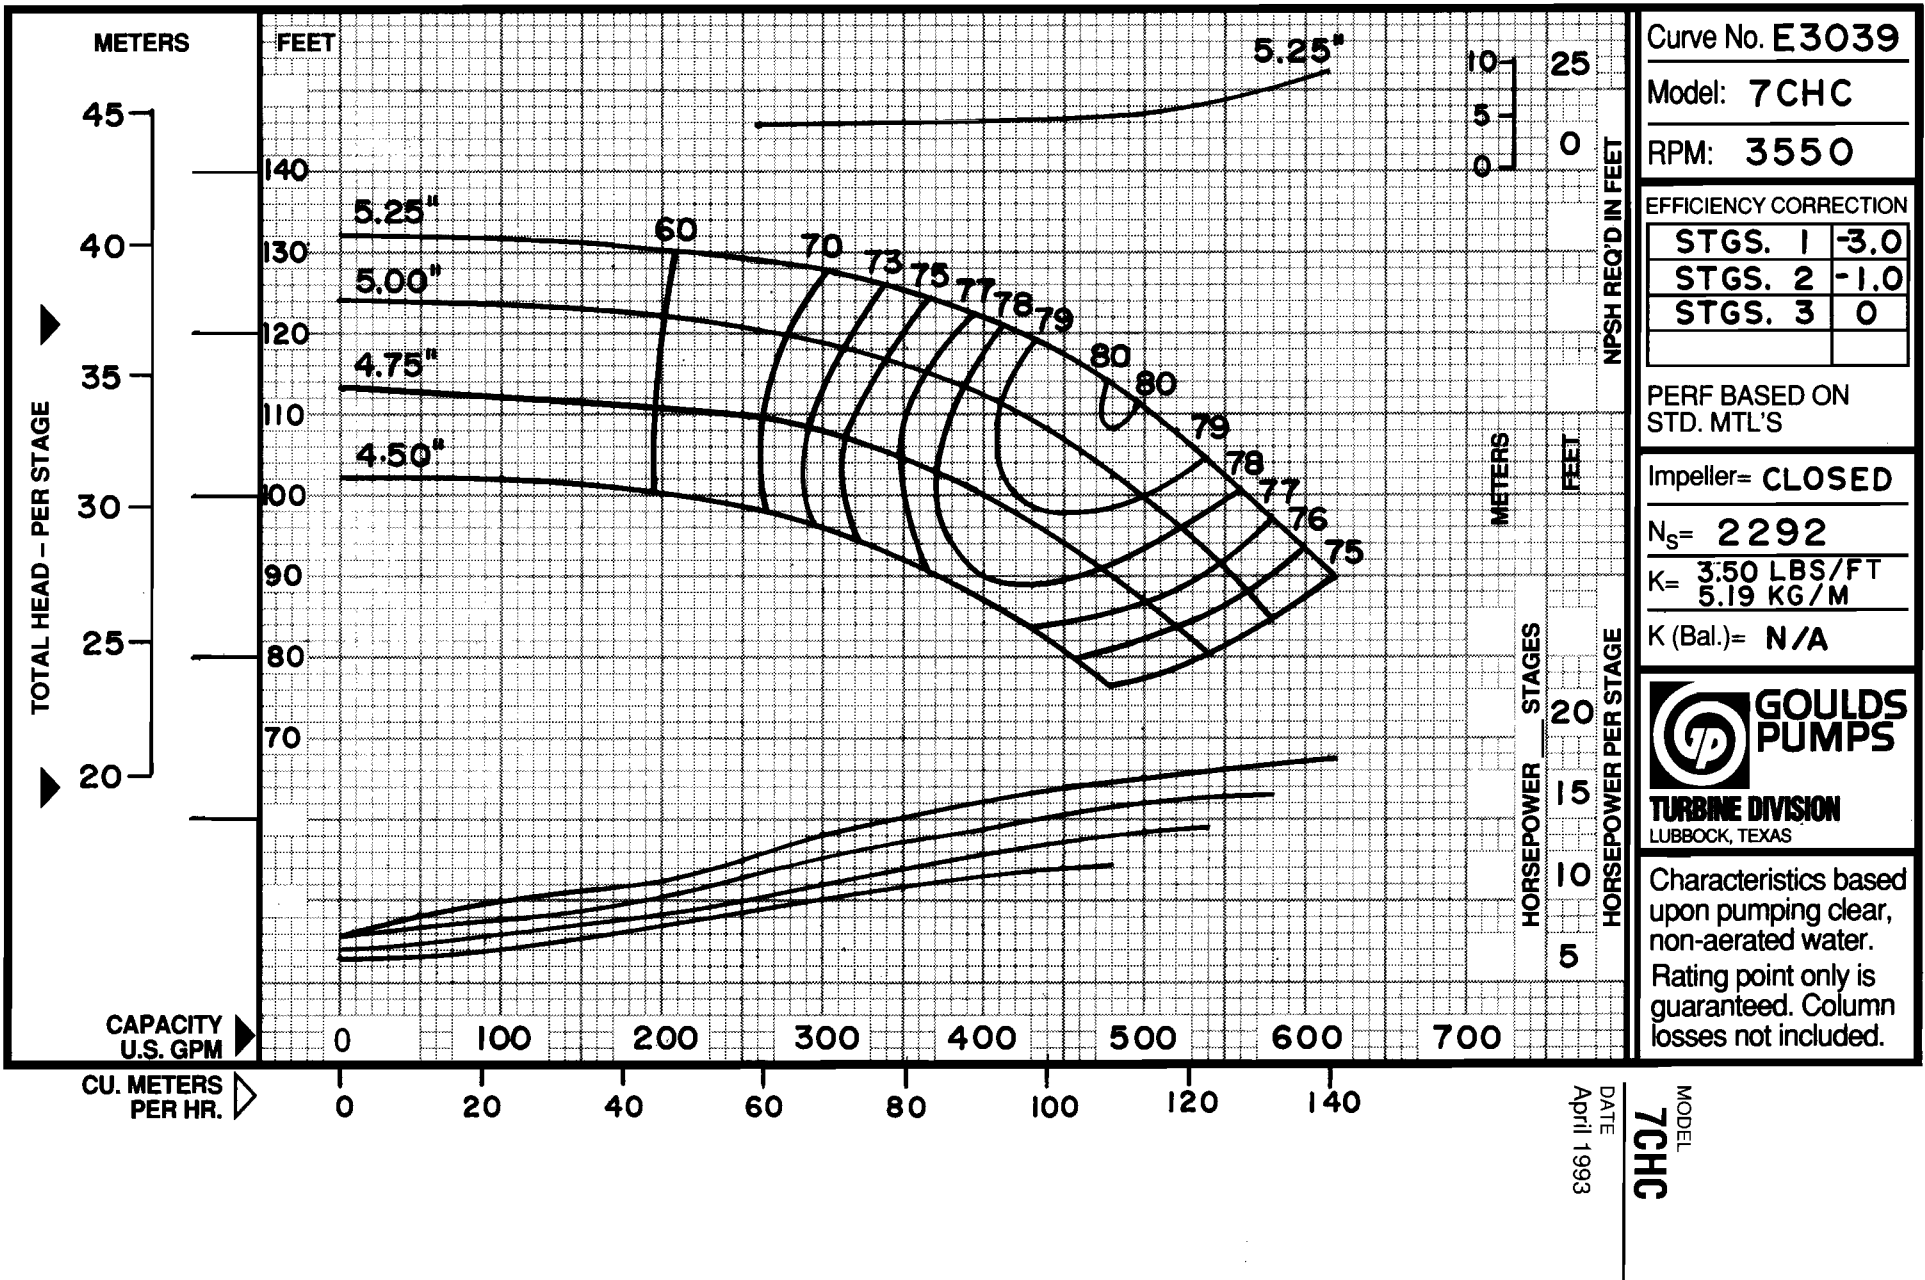

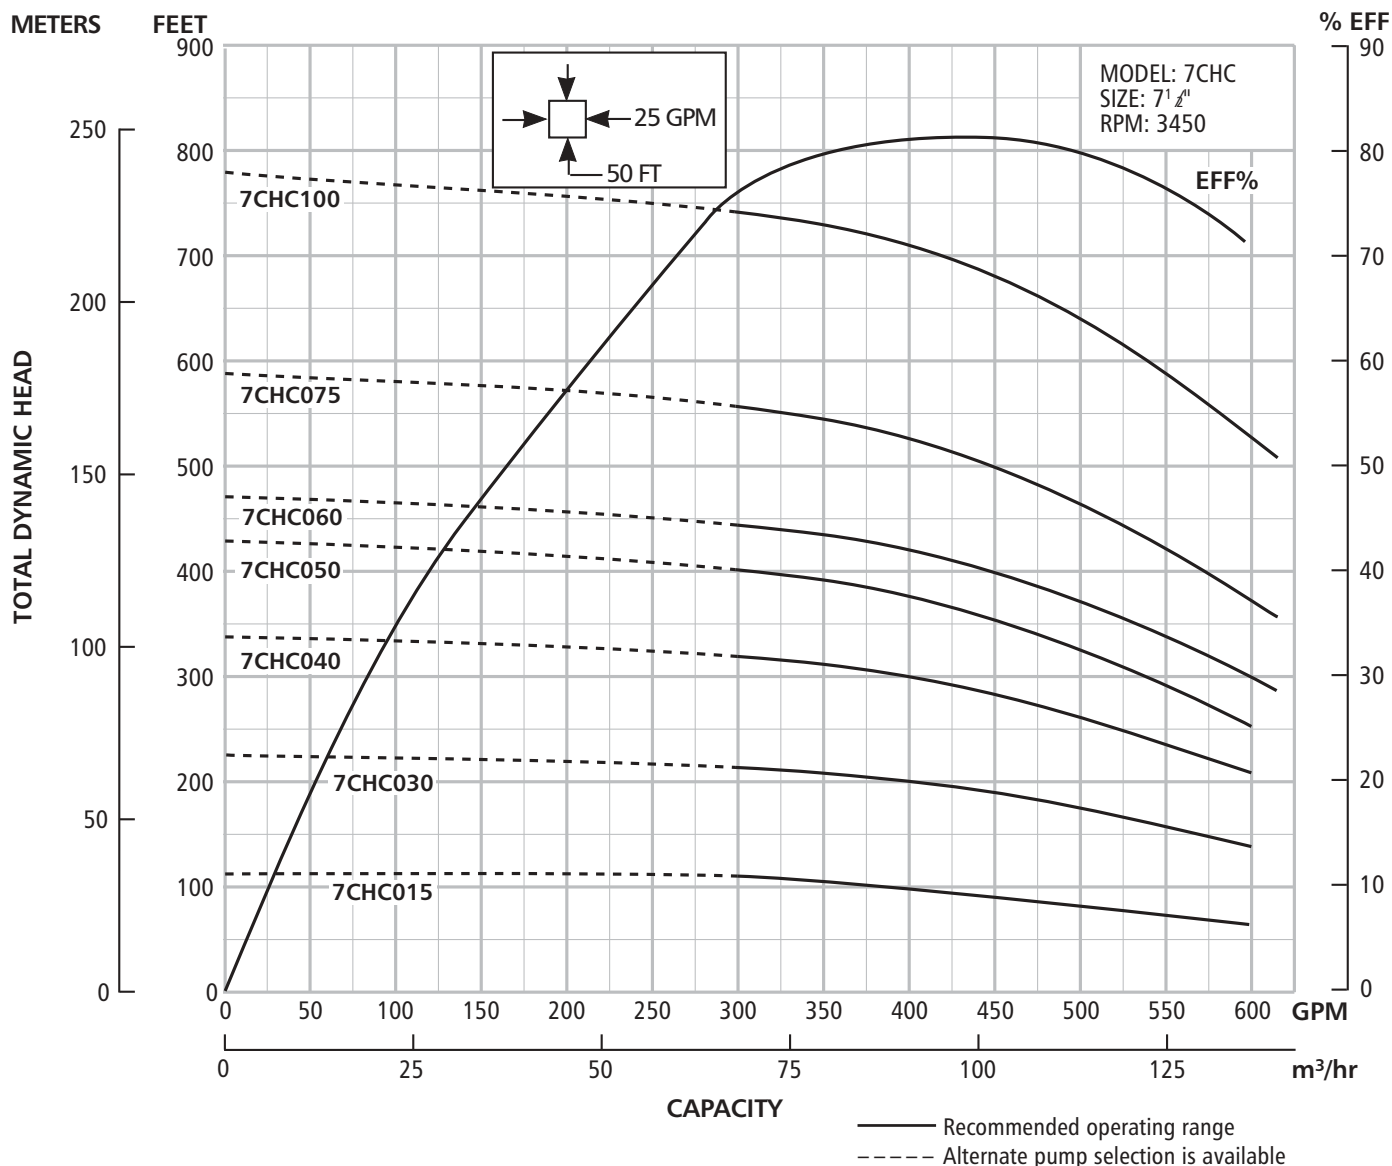

DIMENSIONS AND WEIGHTS


HP	Stages	W.E. Order Number	W.E. Length	W.E. Wt. (lbs.)
15	1	07CHC01566ATS	22.9	75
30	2	07CHC03066ATS	29.3	103
40	3	07CHC04066ATS	35.6	131
50	4	07CHC05066ATS	42.0	159
60	4	07CHC06066ATS		
75	5	07CHC07586ATS	50.0	199
100	6	07CHC10086ATS	56.5	227

(All dimensions in inches and weights in lbs. Do not use for construction purposes.)

PLEASE NOTE:

- Order motors separately.
- For intermediate horsepower pumps consult factory.
- Solid line is recommended operating range. The dotted line (---) signifies an alternate pump selection is available.
- Please specify all options changes in W.E. order number.

6" NPT DISCHARGE CONNECTION

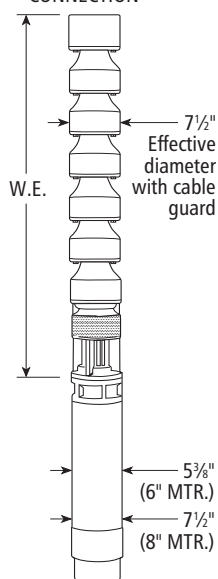

MATERIALS OF CONSTRUCTION

Part Name	Material
Shaft	ASTM A582 TYPE 416
Coupling	ASTM A582 S41600 CD
Suction Adapter	Ductile Iron ASTM A536
Discharge Bowl	ASTM A48 CL 30B
Rubber Bearings	RUBBER
Optional Bronze Bearings	ASTM B584
Discharge Bowl Bearing	ASTM B584
Taperlocks	ASTM A108 GR 101B
Bowl	ASTM A48 CL 30B
Upthrust Collar	Polyethylene
Impeller	ASTM B584
Fasteners	SAEJ429 GR 8
Cable Guard	ASTM A240 S 30400
Suction Strainer	ASTM A240 S 30400