


METERS FEET

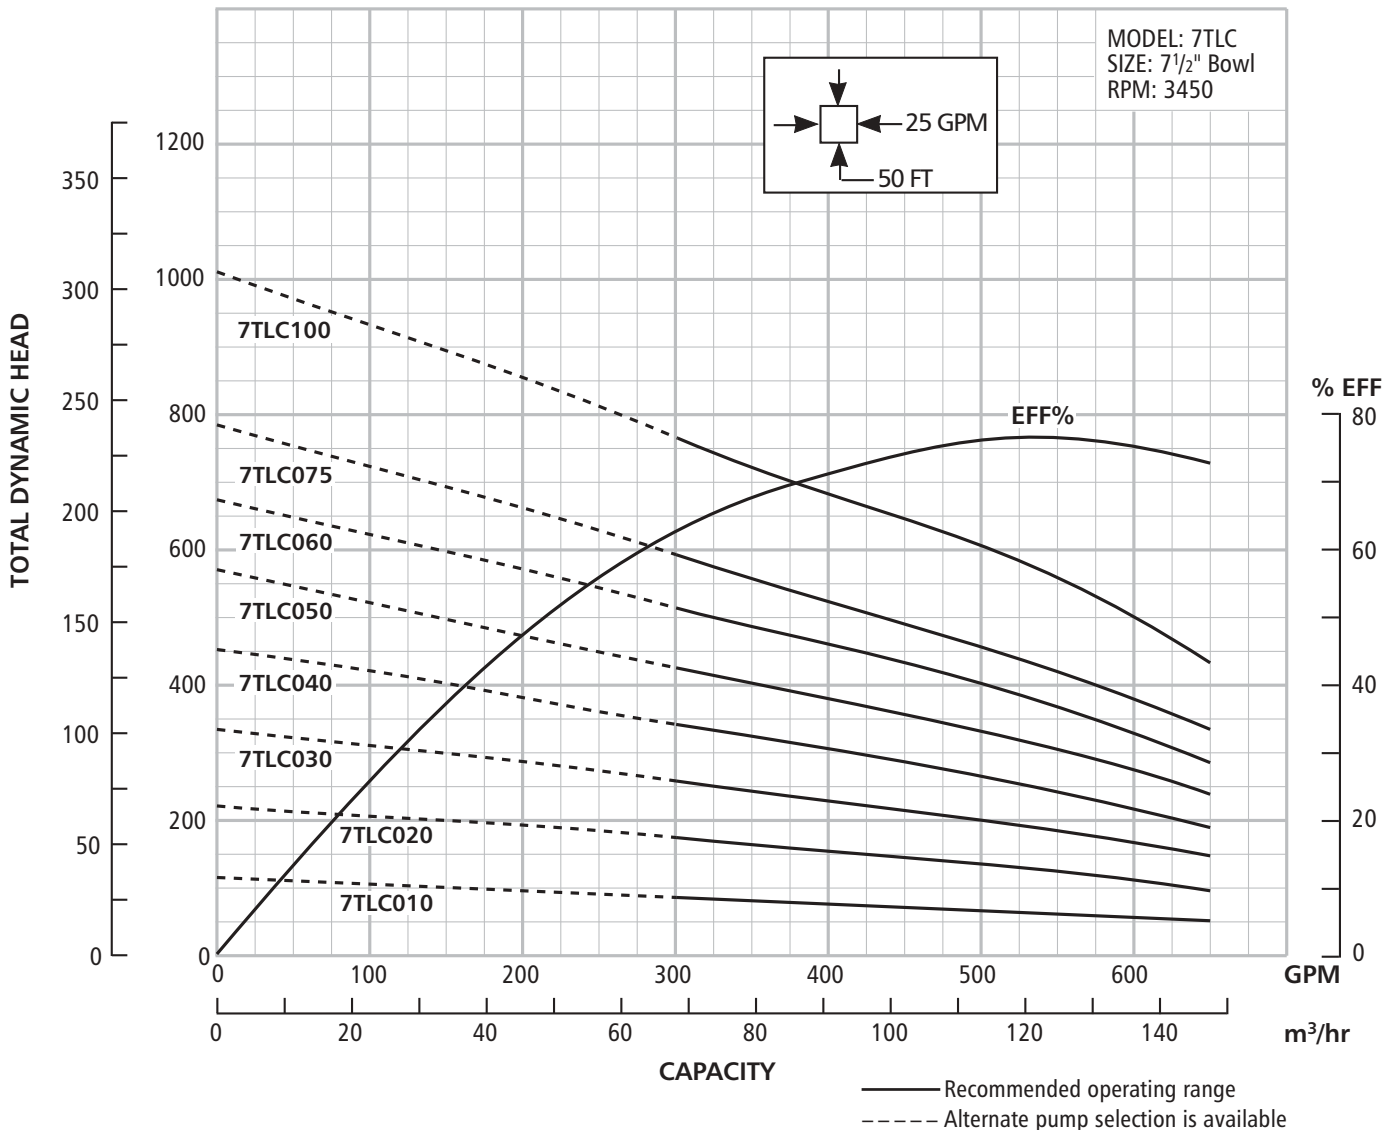

DIMENSIONS AND WEIGHTS


HP	Stages	W.E. Order Number	W.E. Length	W.E. Wt. (lbs.)
10	1	07TLC01066BTS	23.6	78
20	2	07TLC02066BTS	30.7	109
30	3	07TLC03066BTS	37.8	140
40	4	07TLC04066BTS	44.7	171
50	5	07TLC05066BTS	52.0	202
60	6	07TLC06066BTS	59.0	233
75	7	07TLC07586BTS	67.8	276
100	9	07TLC10086BTS	81.8	338

(All dimensions in inches and weights in lbs. Do not use for construction purposes.)

PLEASE NOTE:

- Order motors separately.
- For intermediate horsepower pumps consult factory.
- Solid line is recommended operating range. The dotted line (---) signifies an alternate pump selection is available.
- Please specify all options changes in W.E. order number.

6" NPT DISCHARGE CONNECTION

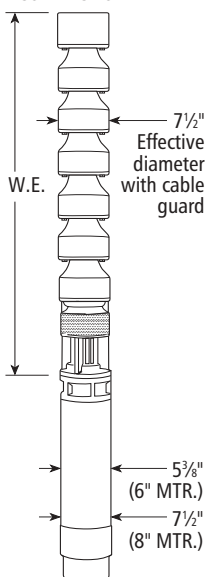

MATERIALS OF CONSTRUCTION

Part Name	Material
Shaft	ASTM A582 TYPE 416
Coupling	ASTM A582 S41600 CD
Suction Adapter	Ductile Iron ASTM A536
Discharge Bowl	ASTM A48 CL 30B
Rubber Bearings	RUBBER
Optional Bronze Bearings	ASTM B584
Discharge Bowl Bearing	ASTM B584
Taperlocks	ASTM A108 GR 101B
Bowl	ASTM A48 CL 30B
Upthrust Collar	Polyethylene
Impeller	ASTM B584
Fasteners	SAE J429 GR 8
Cable Guard	ASTM A240 S 30400
Suction Strainer	ASTM A240 S 30400