


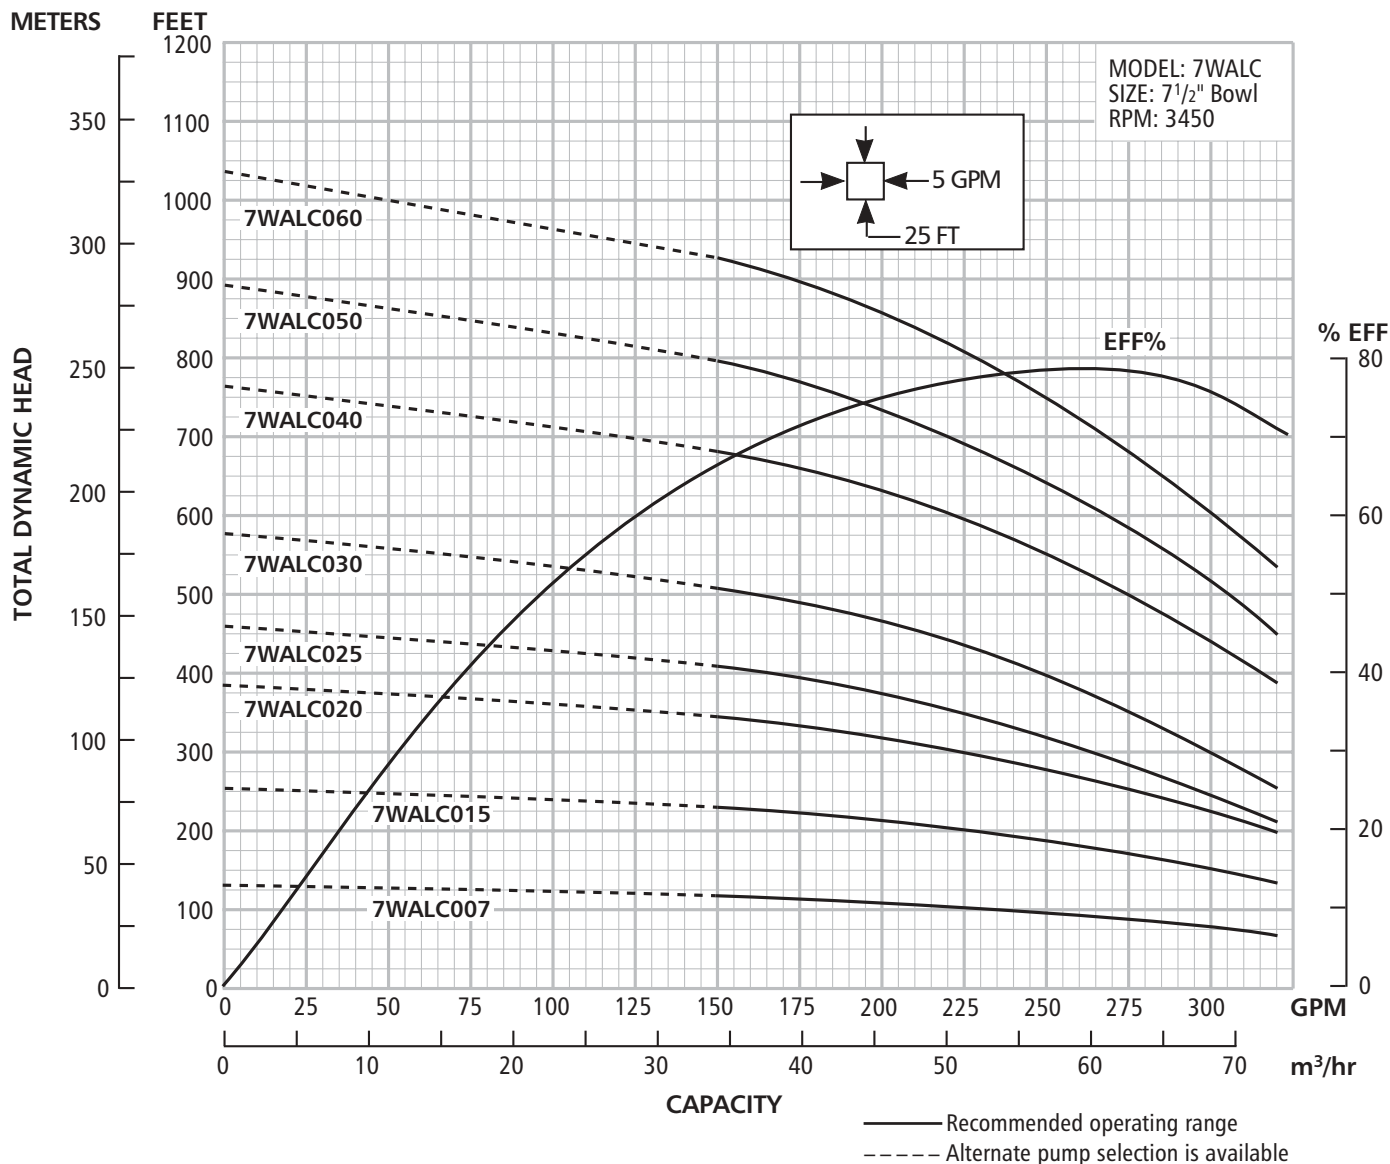

DIMENSIONS AND WEIGHTS


HP	Stages	W.E. Order Number	W.E. Length	W.E. Wt. (lbs.)
7.5	1	07WALC00766ATS	22.0	68
15	2	07WALC01566ATS	27.5	98
20	3	07WALC02066ATS	33.0	128
25	4	07WALC02566ATS	38.5	158
30	5	07WALC03066ATS	44.0	188
40	6	07WALC04066ATS	49.5	218
50	7	07WALC05066ATS	55.0	248
60	8	07WALC06066ATS	60.5	278

(All dimensions in inches and weights in lbs. Do not use for construction purposes.)

PLEASE NOTE:

- Order motors separately.
- For intermediate horsepower pumps consult factory.
- Solid line is recommended operating range. The dotted line (---) signifies an alternate pump selection is available.
- Please specify all options changes in W.E. order number.

6" NPT DISCHARGE CONNECTION

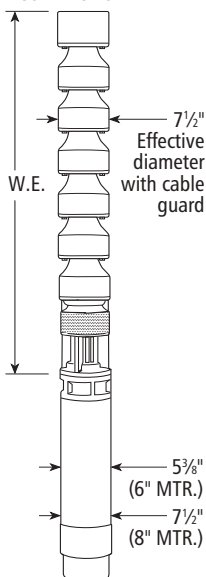

MATERIALS OF CONSTRUCTION

Part Name	Material
Shaft	ASTM A582 TYPE 416
Coupling	ASTM A582 S41600 CD
Suction Adapter	Ductile Iron ASTM A536
Discharge Bowl	ASTM A48 CL 30B
Rubber Bearings	RUBBER
Optional Bronze Bearings	ASTM B584
Discharge Bowl Bearing	ASTM B584
Taperlocks	ASTM A108 GR 101B
Bowl	ASTM A48 CL 30B
Upthrust Collar	Polyethylene
Impeller	ASTM B584
Fasteners	SAEJ429 GR 8
Cable Guard	ASTM A240 S 30400
Suction Strainer	ASTM A240 S 30400