


METERS FEET

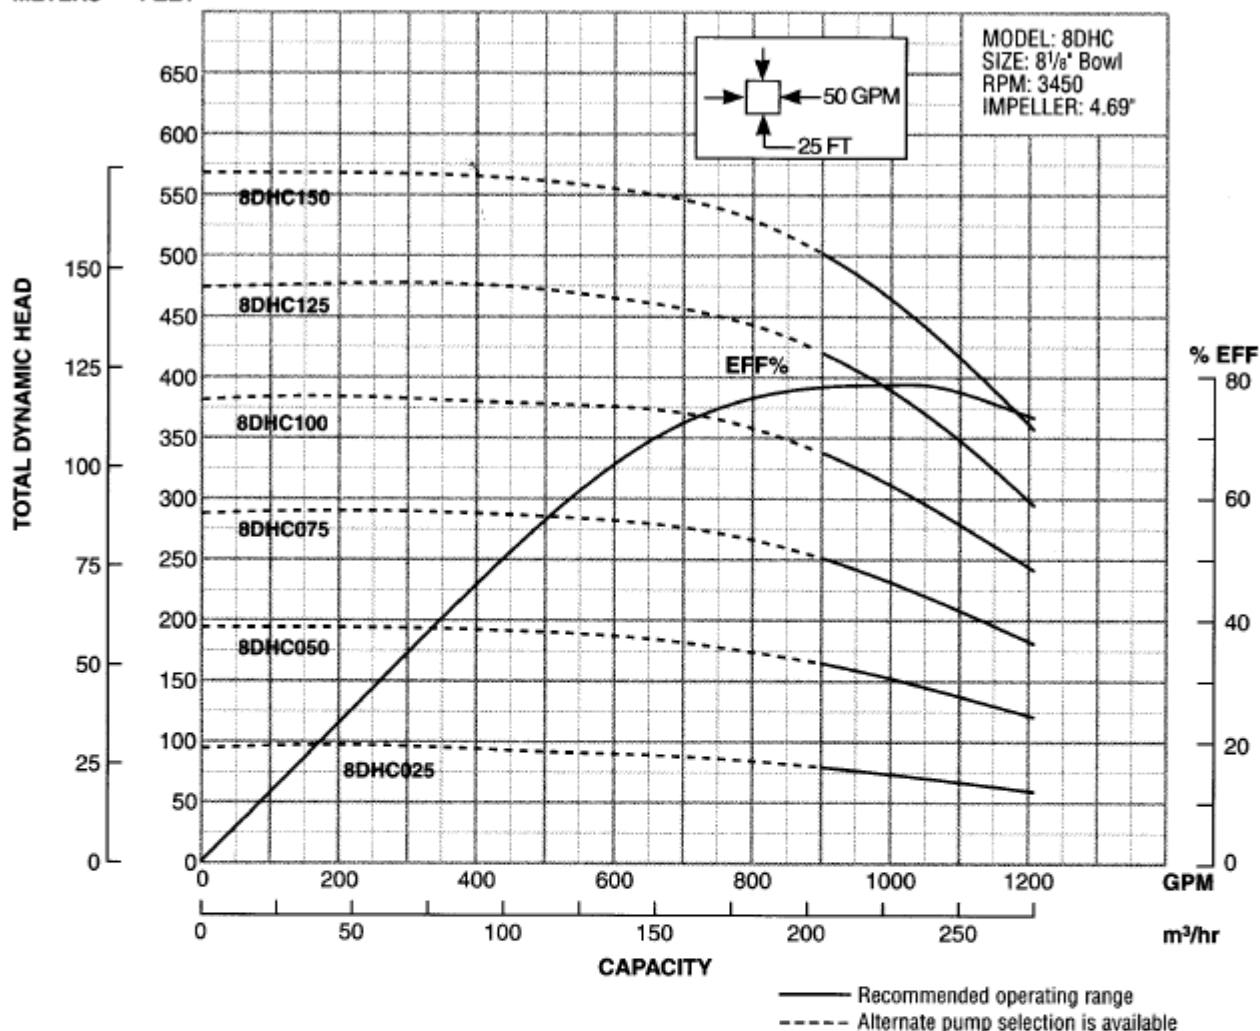

DIMENSIONS AND WEIGHTS

HP	Stages	W.E. Order Number	W.E. Length	W.E. Wt. (lbs.)
25	1	8DHC02566BTS	24	125
50	2	8DHC05066BTS	31 1/4	159
75	3	8DHC07586BTS	38 3/4	193
100	4	8DHC10086BTS	46 3/4	227
125	5	8DHC12586BTS	53 1/2	261
150	6	8DHC15086BTS	60 3/2	295

(All dimensions in inches and weights in lbs. Do not use for construction purposes.)

PLEASE NOTE:

- Order motors separately.
- For intermediate horsepower pumps consult factory.
- Solid line is recommended operating range. The dotted line (---) signifies an alternate pump selection is available.
- Please specify all options changes in W.E. order number.

6" NPT DISCHARGE CONNECTION



MATERIALS OF CONSTRUCTION

Part Name	Material
Shaft	ASTM A582 TYPE 416
Coupling	ASTM A582 S41600 CD
Suction Adapter	ASTM A48 CL 40
Discharge Bowl	ASTM A48 CL 30B
Rubber Bearings	RUBBER
Optional Bronze Bearings	ASTM B584
Discharge Bowl Bearing	ASTM B584
Taperlocks	ASTM A108 GR 101B
Epoxy Lined Bowl	ASTM A48 CL 30B
Upthrust Collar	ASTM A276 S41400
Impeller	ASTM B584
Fasteners	SAEJ429 GR 8
Cable Guard	ASTM A240 S 30400
Suction Strainer	ASTM A240 S 30400