


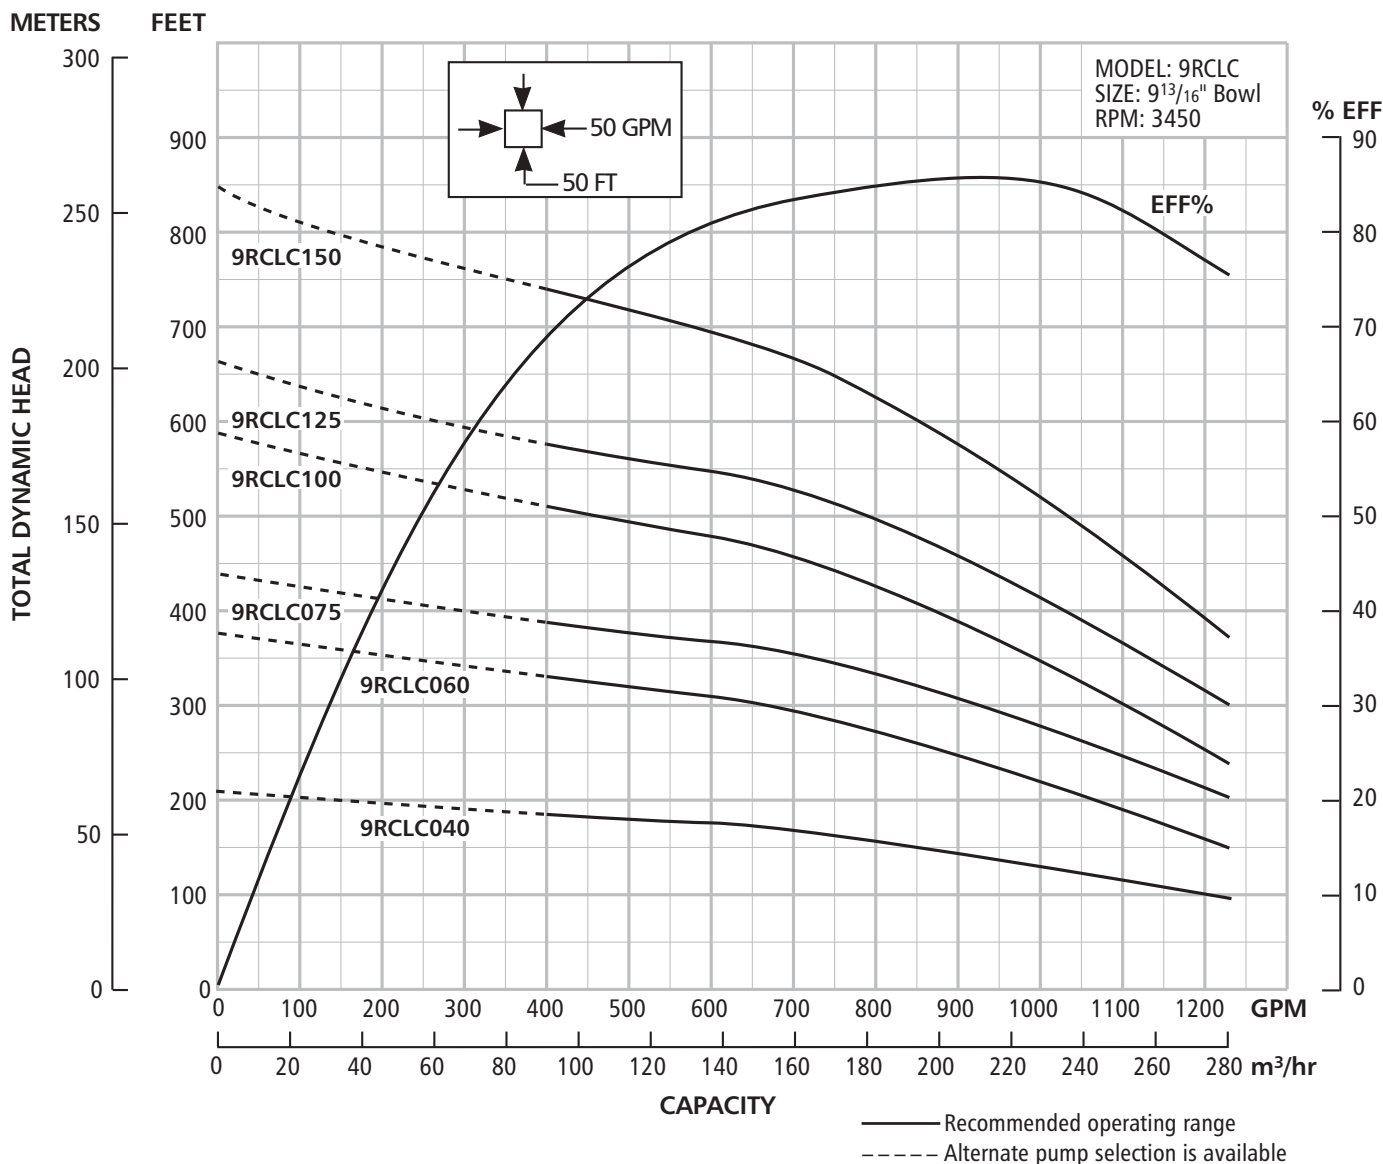


DIMENSIONS AND WEIGHTS

HP	Stages	W.E. Order Number	W.E. Length	W.E. Wt. (lbs.)
40	1	09RCLC04066ATS	28.0	194
60	2	09RCLC06066ATS	36.6	258
75	2	09RCLC07586ATS	34.8	270
100	3	09RCLC10086ATS	43.2	334
125	3	09RCLC12586ATS	43.2	334
150	4	09RCLC15086ATS	51.8	398

(All dimensions in inches and weights in lbs. Do not use for construction purposes.)


PLEASE NOTE:

- Order motors separately.
- For intermediate horsepower pumps consult factory.
- Solid line is recommended operating range. The dotted line (---) signifies an alternate pump selection is available.
- Please specify all options changes in W.E. order number.

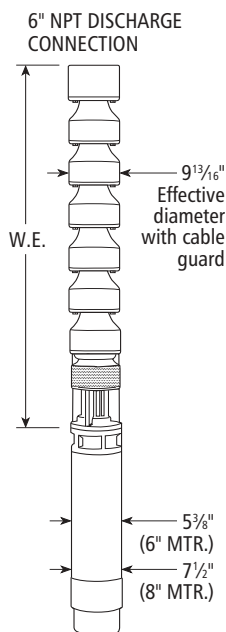

MATERIALS OF CONSTRUCTION

Part Name	Material
Shaft	ASTM A582 TYPE 416
Coupling	ASTM A582 S41600 CD
Suction Adapter	Ductile Iron ASTM A536
Discharge Bowl	ASTM A48 CL 30B
Rubber Bearings	RUBBER
Optional Bronze Bearings	ASTM B584
Discharge Bowl Bearing	ASTM B584
Taperlocks	ASTM A108 GR 101B
Bowl	ASTM A48 CL 30B
Upthrust Collar	Polyethylene
Impeller	ASTM B584
Fasteners	SAEJ429 GR 8
Cable Guard	ASTM A240 S 30400
Suction Strainer	ASTM A240 S 30400

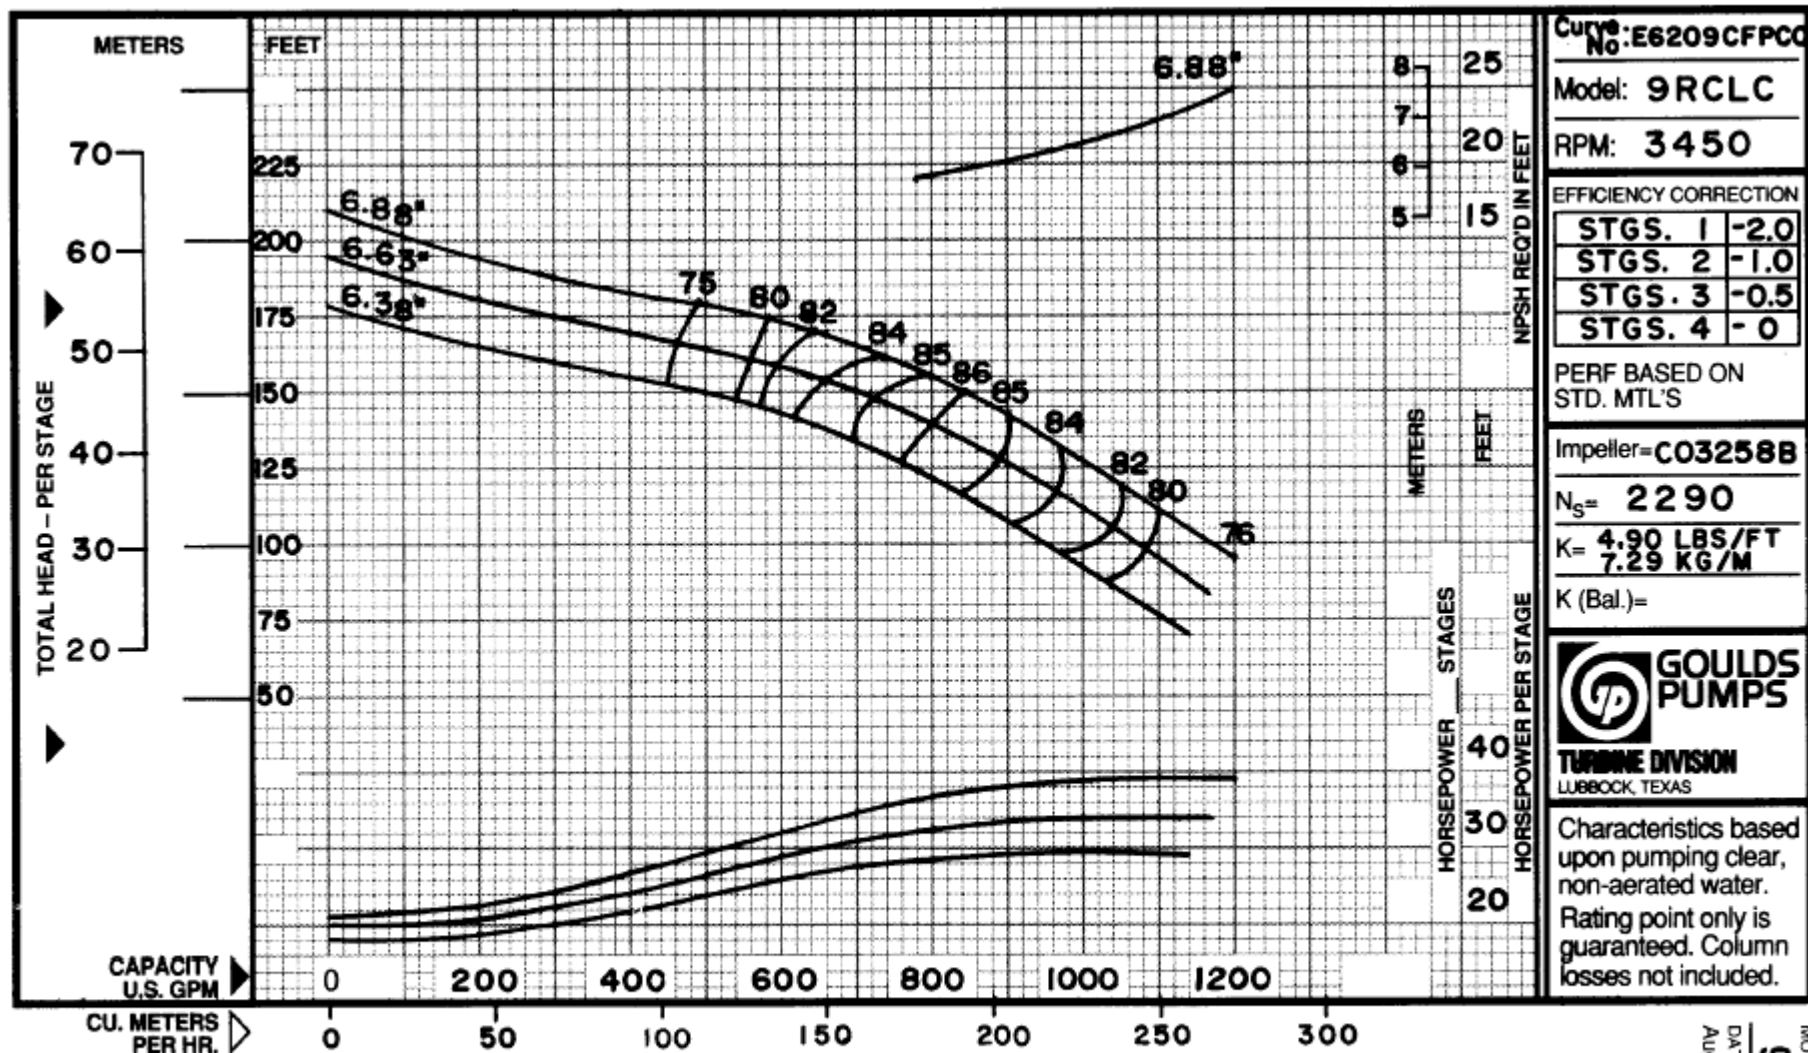

MODEL
9RCLC
 DATE
 August, 1995