


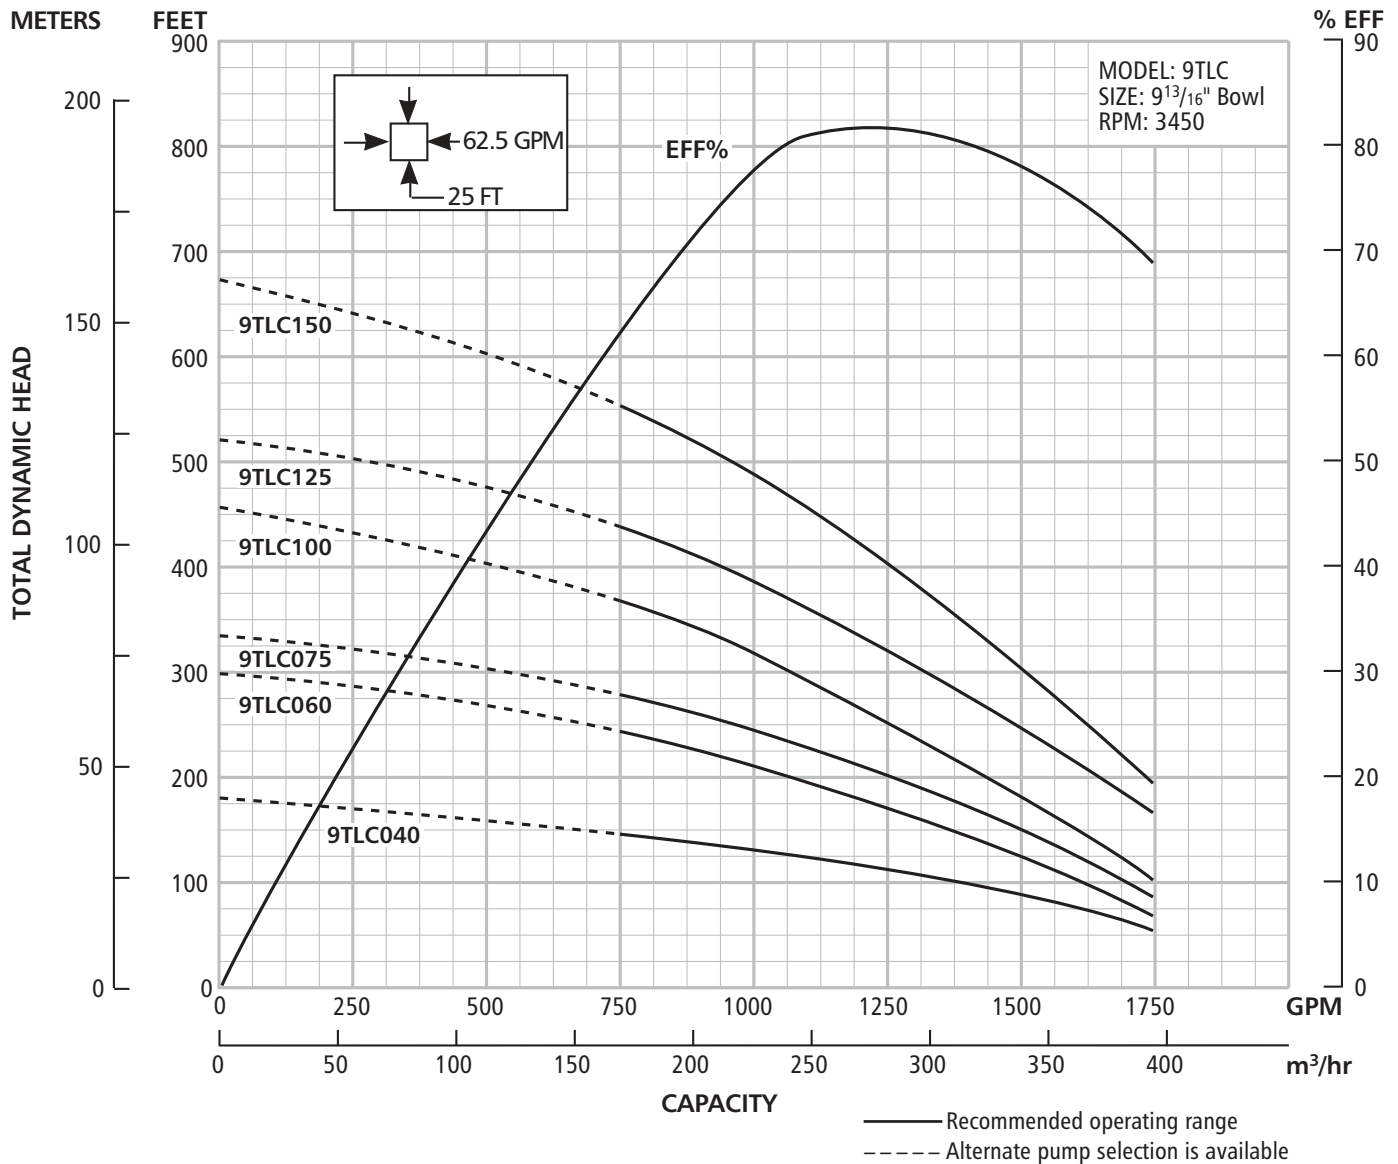


## DIMENSIONS AND WEIGHTS

| HP  | Stages | W.E. Order Number | W.E. Length | W.E. Wt. (lbs.) |
|-----|--------|-------------------|-------------|-----------------|
| 40  | 1      | 09TLC04066ATS     | 28.9        | 200             |
| 60  | 2      | 09TLC06066ATS     | 38.1        | 270             |
| 75  | 2      | 09TLC07586ATS     | 36.3        | 282             |
| 100 | 3      | 09TLC10086ATS     | 45.5        | 352             |
| 125 | 3      | 09TLC12586ATS     | 45.5        | 352             |
| 150 | 4      | 09TLC15086ATS     | 57.8        | 422             |

(All dimensions in inches and weights in lbs. Do not use for construction purposes.)


### PLEASE NOTE:

- Order motors separately.
- For intermediate horsepower pumps consult factory.
- Solid line is recommended operating range. The dotted line (---) signifies an alternate pump selection is available.
- Please specify all options changes in W.E. order number.

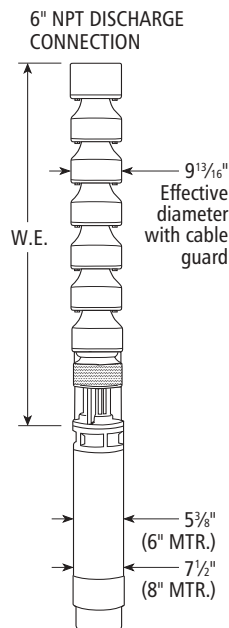

## MATERIALS OF CONSTRUCTION

| Part Name                | Material               |
|--------------------------|------------------------|
| Shaft                    | ASTM A582 TYPE 416     |
| Coupling                 | ASTM A582 S41600 CD    |
| Suction Adapter          | Ductile Iron ASTM A536 |
| Discharge Bowl           | ASTM A48 CL 30B        |
| Rubber Bearings          | RUBBER                 |
| Optional Bronze Bearings | ASTM B584              |
| Discharge Bowl Bearing   | ASTM B584              |
| Taperlocks               | ASTM A108 GR 101B      |
| Bowl                     | ASTM A48 CL 30B        |
| Upthrust Collar          | Polyethylene           |
| Impeller                 | ASTM B584              |
| Fasteners                | SAEJ429 GR 8           |
| Cable Guard              | ASTM A240 S 30400      |
| Suction Strainer         | ASTM A240 S 30400      |

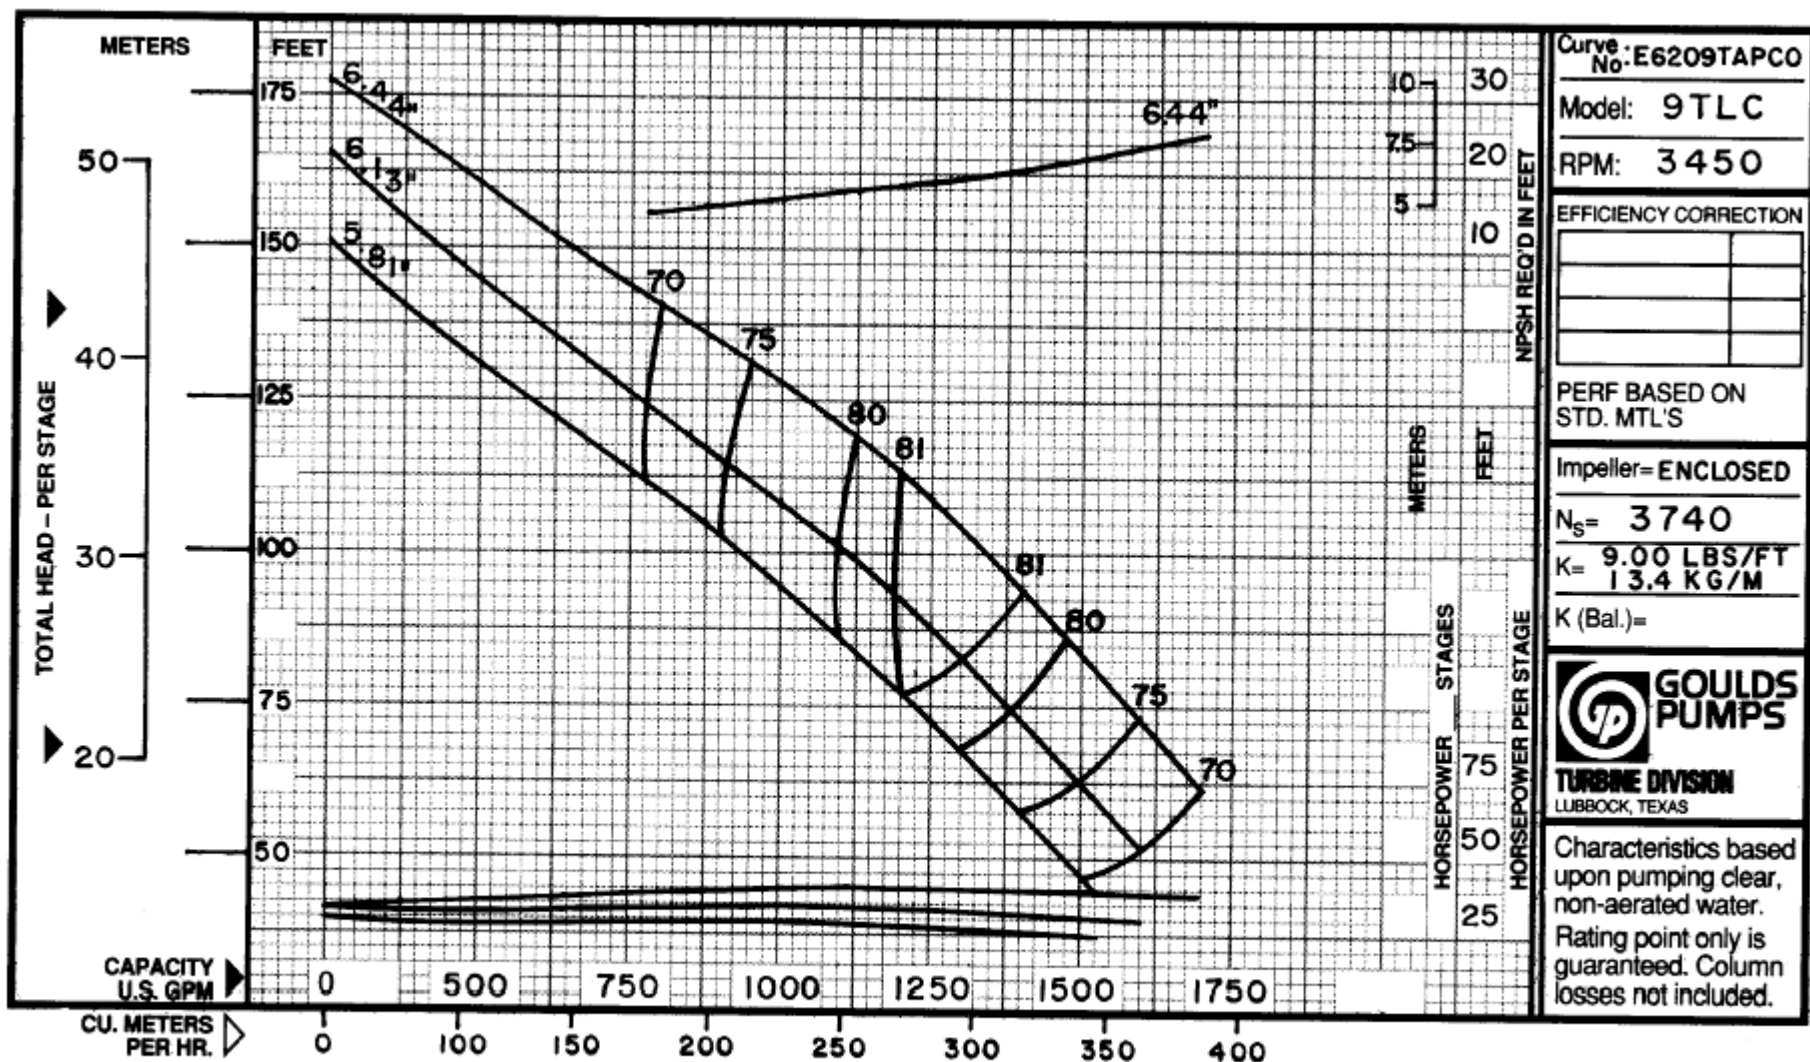

MODEL  
**9TLC**  
 DATE  
 March 1996  
 SUPERCEDES  
 NEW