PER STAGE	IMP. DIA	IMP. EXIT	IMPELLER PART NO. 2597	THRUST CONSTANT 32.0	PUMP SHAFT DIAM. $1\frac{3}{16}$
			IMPELLER PATTERN NO. 2557	WR² 0·72 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 30 INCHES

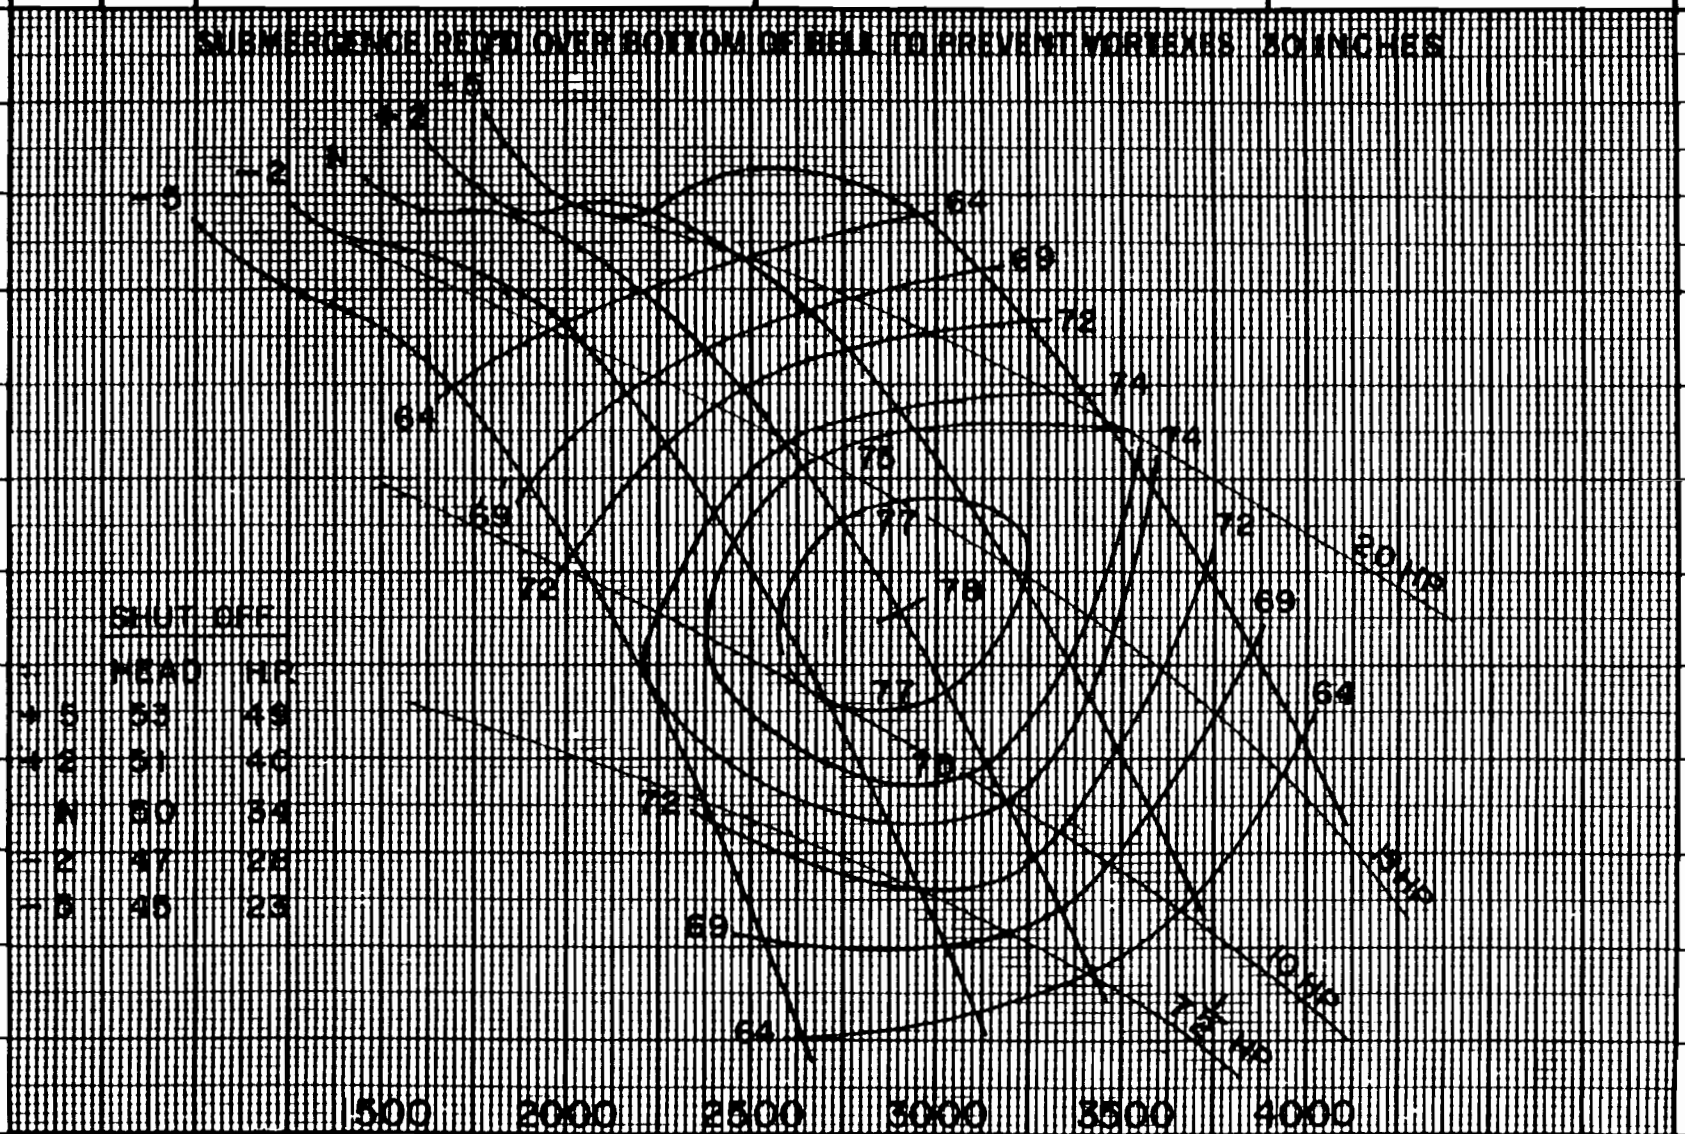

	SHUT OFF HEAD	HP
+5	53	49
+2	51	40
N	50	34
-2	47	28
-5	45	23

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.0

10 PO PROPELLER PUMP 1760 RPM

IMPELLER — BRONZE BOWL — CAST IRON

THE IDEAL PUMP COMPANY

PO BOX 922
STUTTGART, AR 72160