


NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

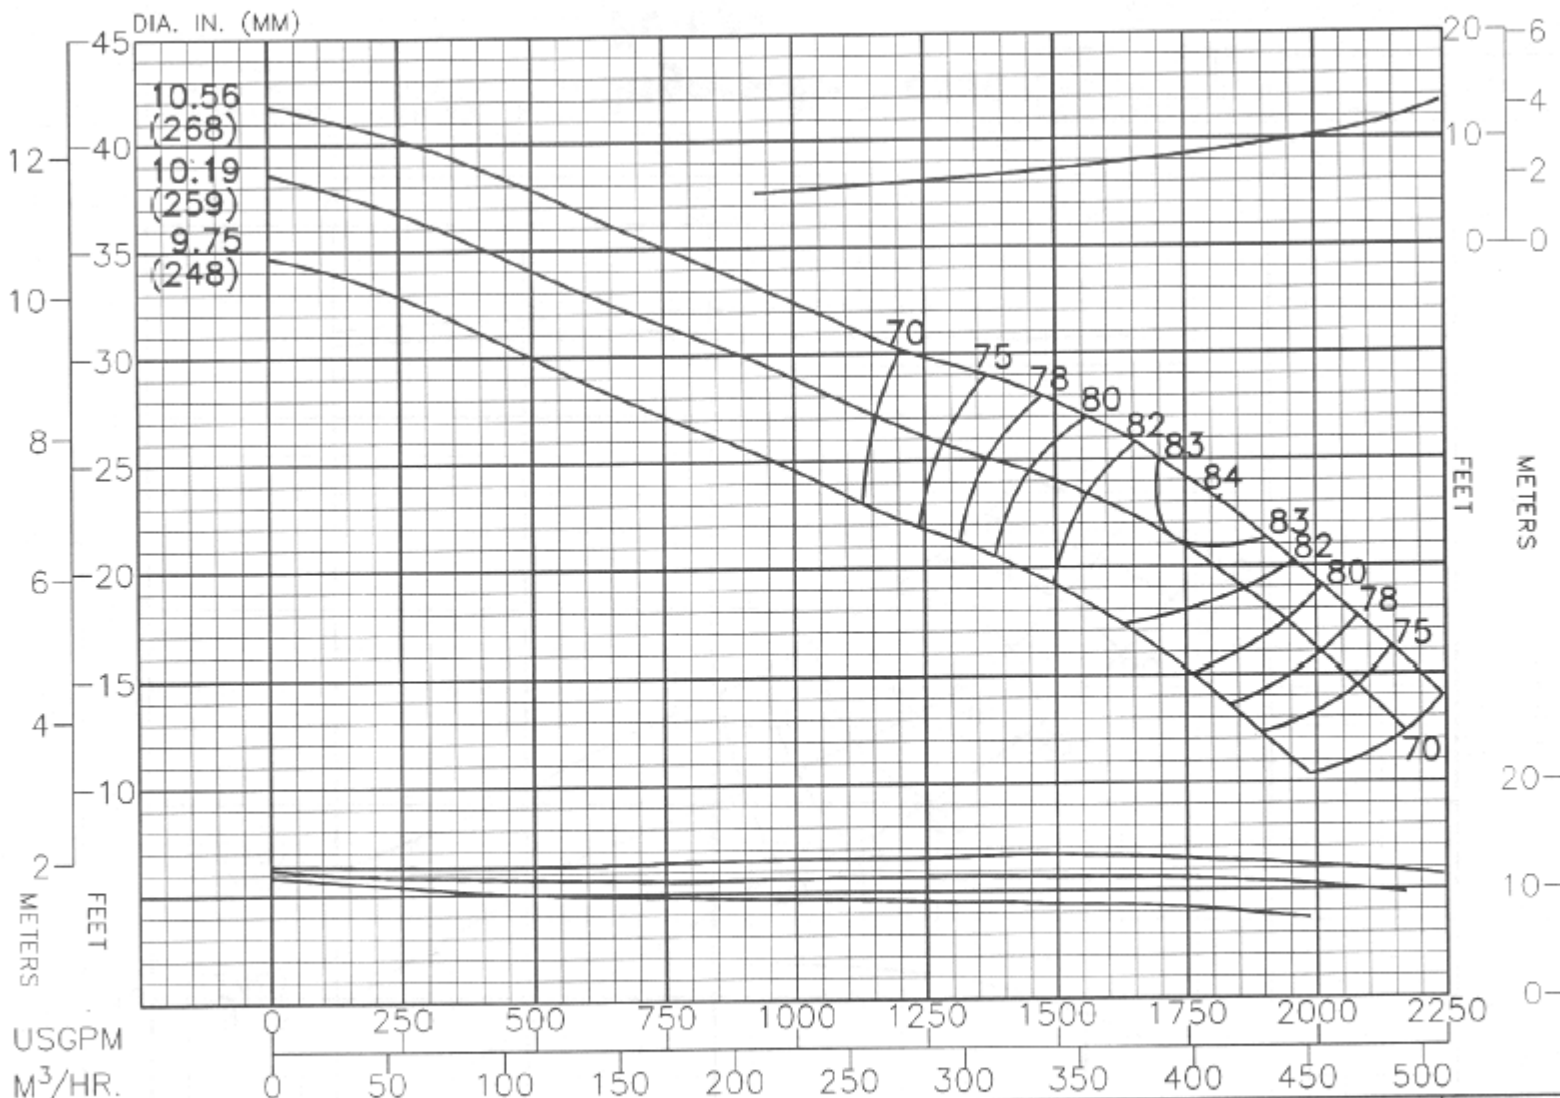

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-1.5
3	-1
4	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	16.4	24.4
BALANCED	---	---
EYE AREA-	44.8	50. IN.

RPM
1175
ENCLOSED IMPELLER
N _s = 4750

PUMP
14HH250
CURVE NO.
EC-2423