


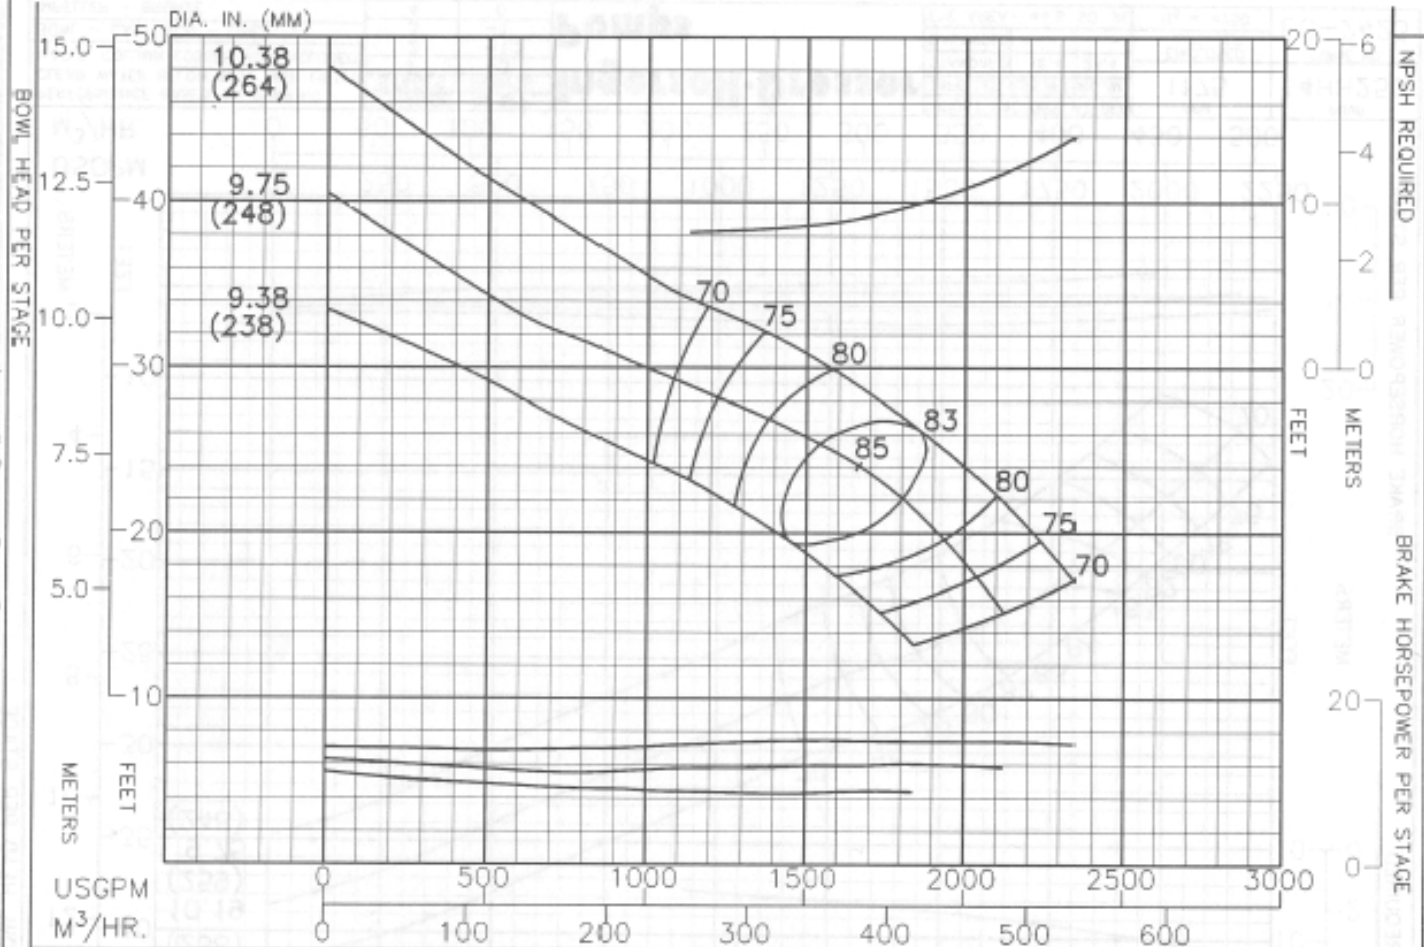

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE	IN EFF.
STAGES	POINTS
1	-1
2	-1
3	-1

Ingersoll-Dresser Pumps

THRUST FACTORS AT BEP	
IMPELLER LBS/FT	KG/M
STANDARD 15.3	22.8
BALANCED ---	---
EYE AREA - 44.2 SQ. IN.	

RPM
1175
ENCLOSED IMPELLER
N _e = 4370

PUMP
14HH276
CURVE NO.
EC-2425