


BOWL HEAD PER STAGE

NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

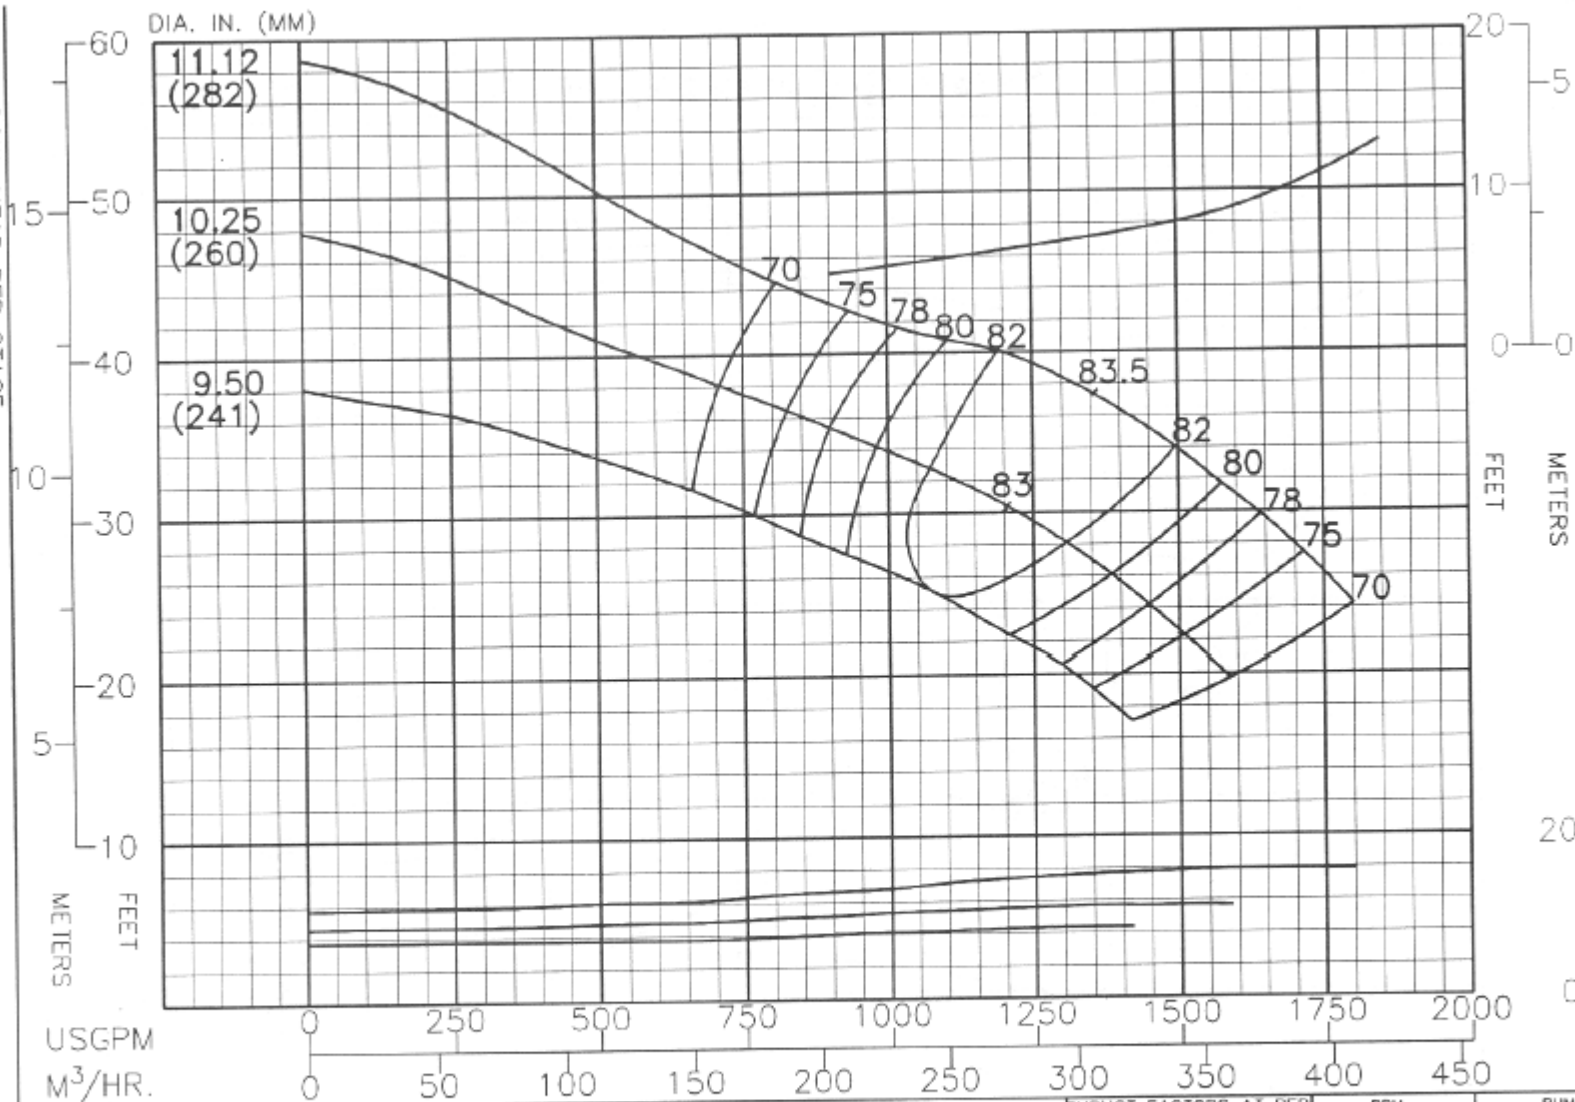

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATERIALS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-2
3	-1
4	0

**Ingersoll-Dresser
Pumps**

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	12.5	18.6
BALANCED	6.6	9.8
EYE AREA-32.7 SQ. IN.		

RPM
1175

ENCLOSED
IMPELLER
N_s = 2870

PUMP
14LKH

CURVE NO.
EC-2242