


BOWL HEAD PER STAGE

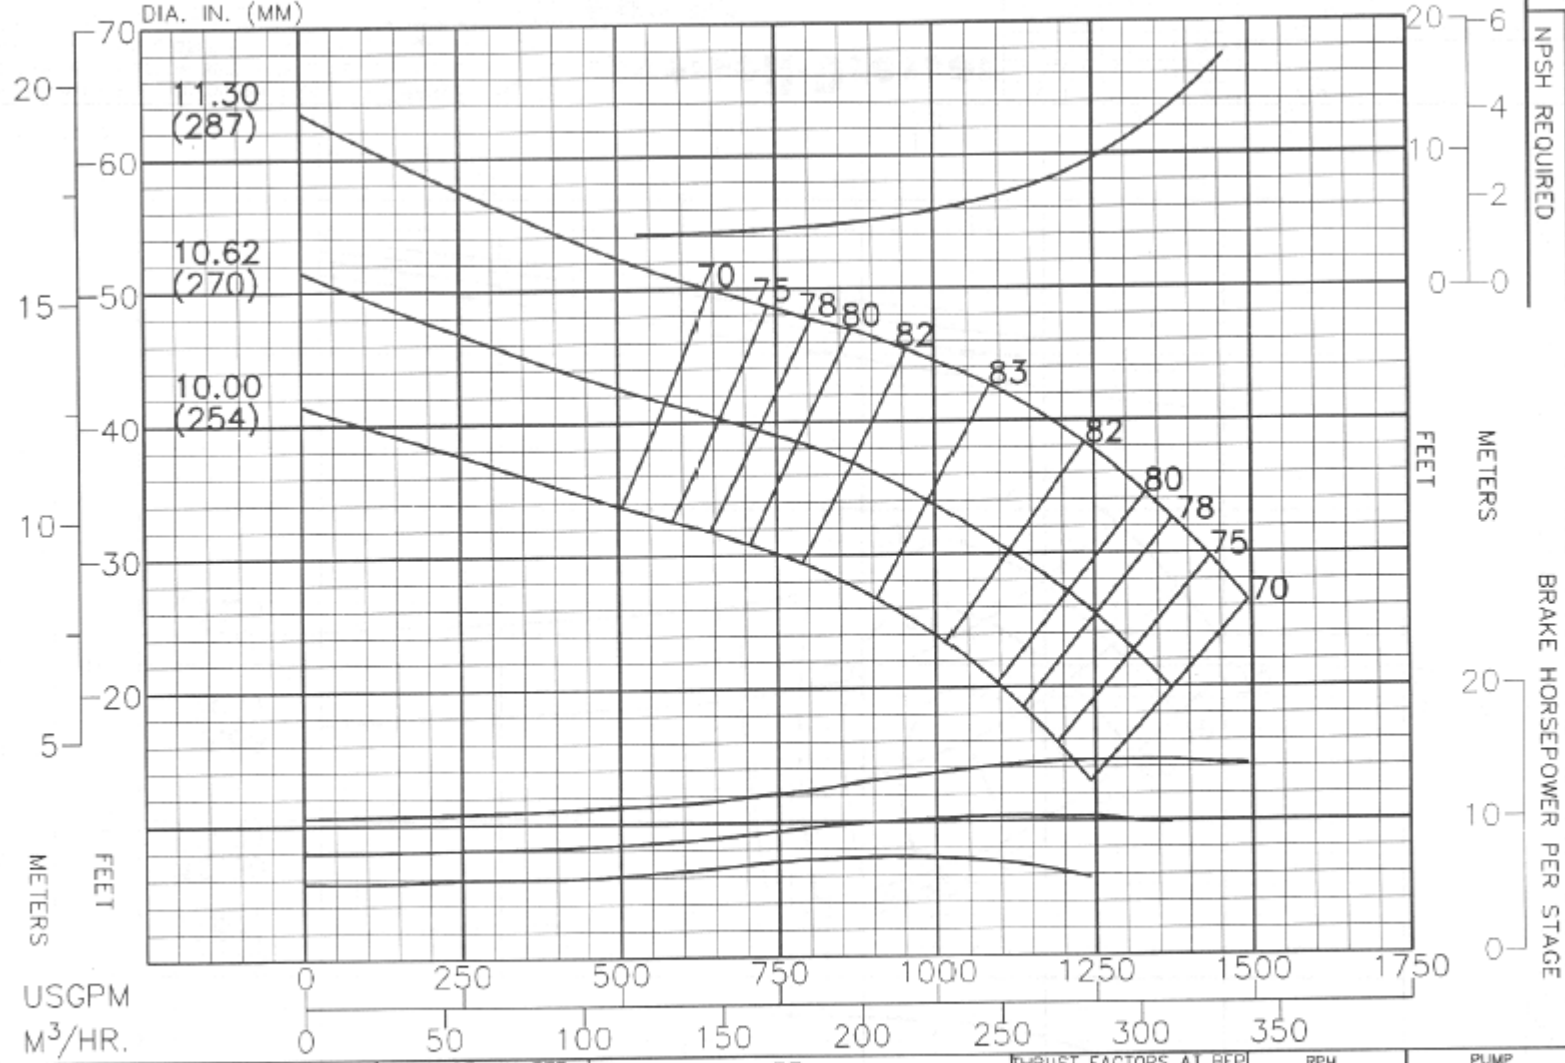

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-2
3	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KC/M
STANDARD	9.19 13.7
BALANCED	--- ---
EYE AREA- 25.3 SQ. IN.	

RPM
1175
ENCLOSED IMPELLER
N _s = 2320

PUMP
14M135
CURVE NO.
EC-2372