


BOWL HEAD PER STAGE

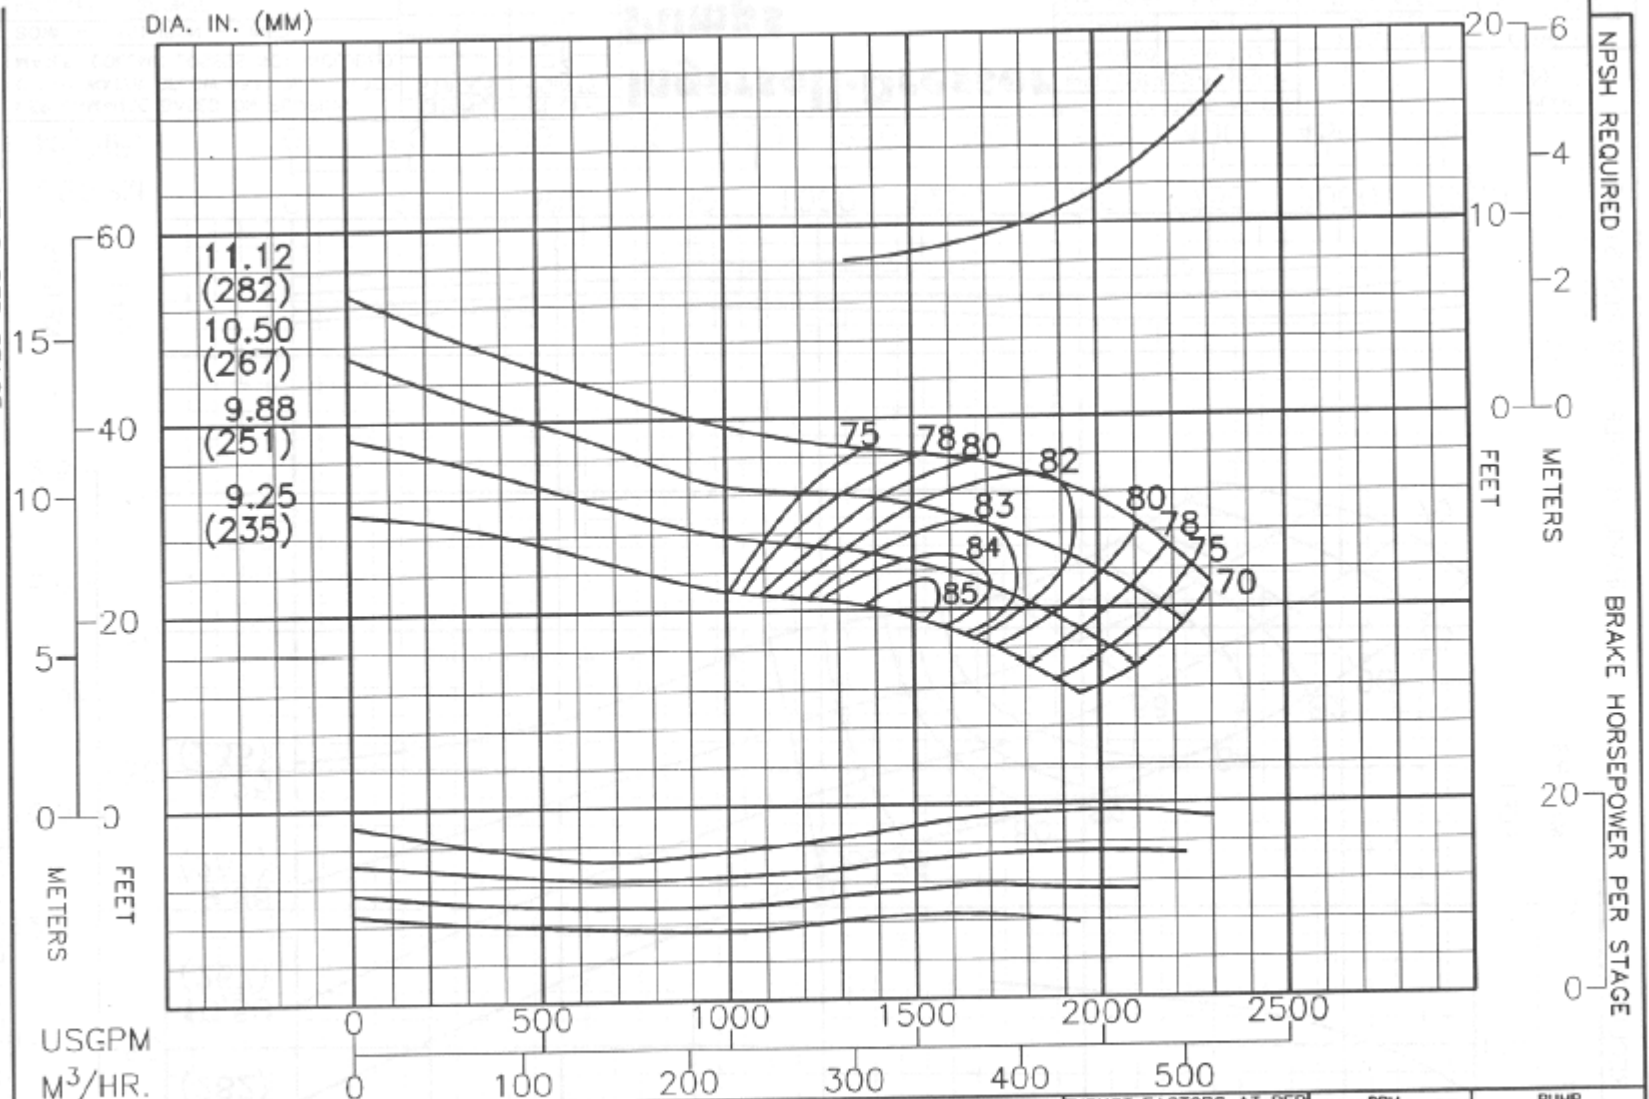

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATLS. COLUMN LOSSES NOT INCLUDED.	CHANGE IN EFF.		Ingersoll-Dresser Pumps	THRUST FACTORS AT BEP		RPM 1175	PUMP 14NKH
	STAGES	POINTS		IMPELLER	LBS/FT KG/M		
	1	-2		STANDARD	13.4 20.0	ENCLOSED IMPELLER N _s = 3700	CURVE NO. EC-1379
	2	-1		BALANCED	9.8 14.6		
BOWL - CAST IRON - LINED	3	0		EYE AREA-36.5 SQ. IN.			
IMPELLER - BRONZE							