


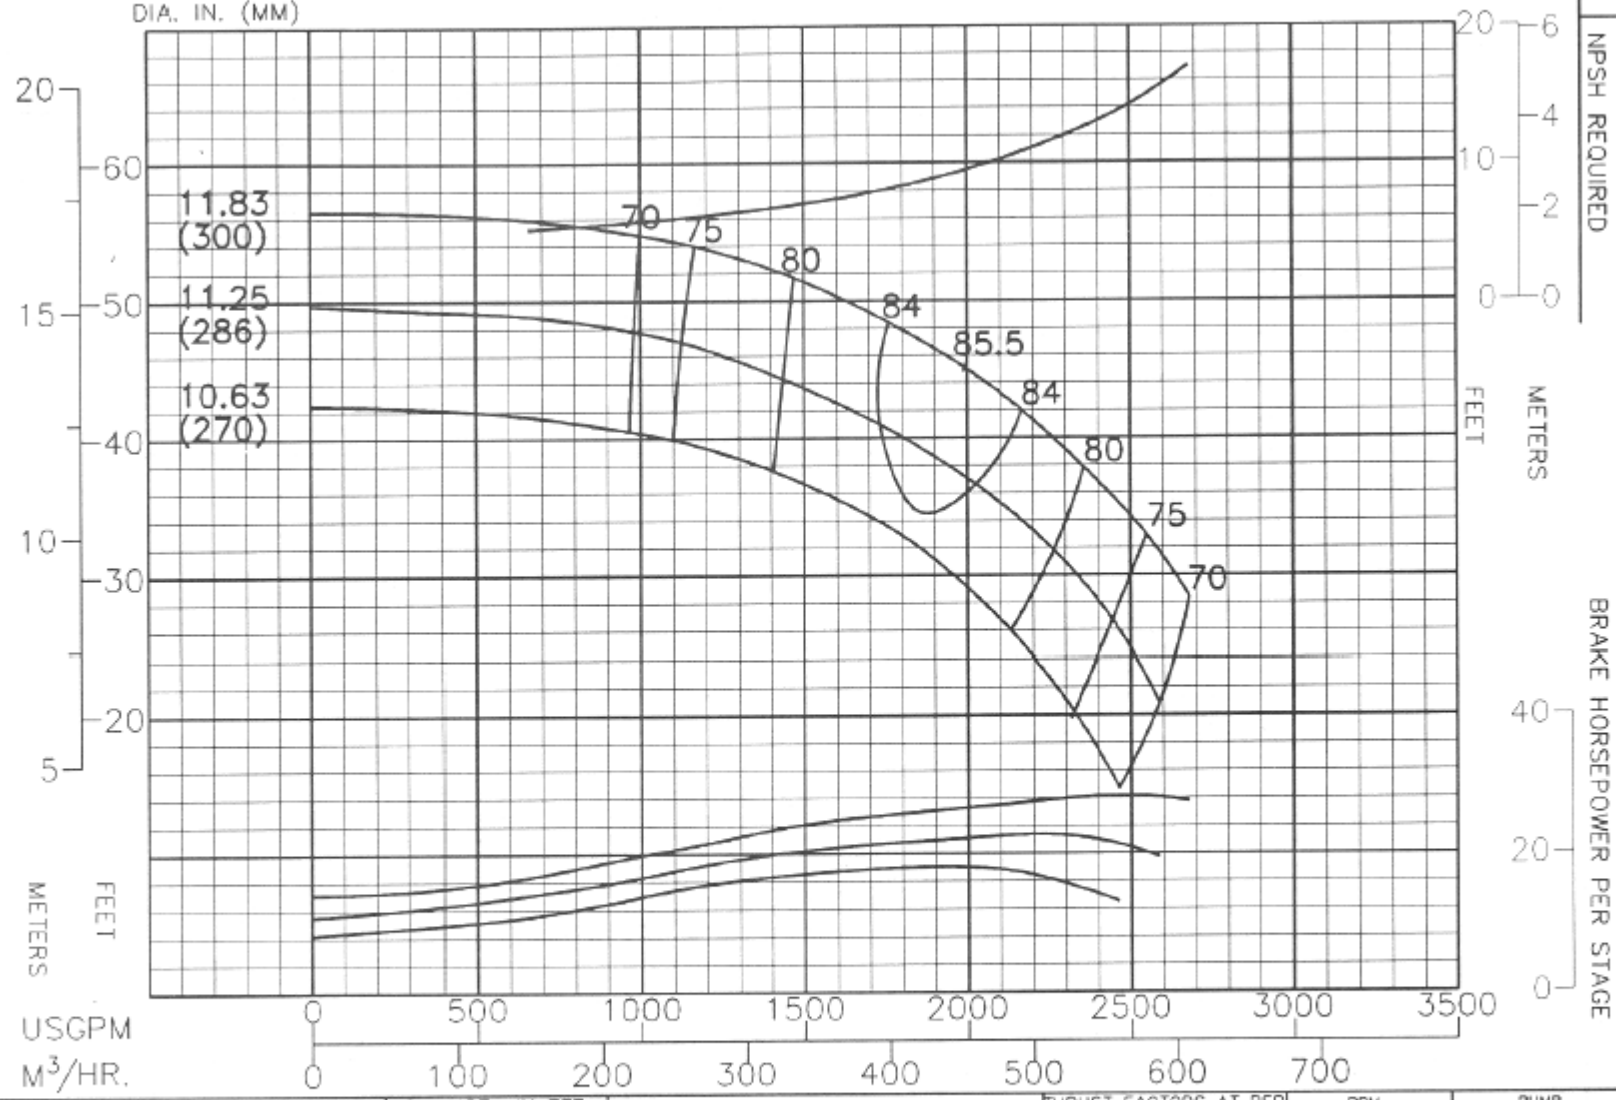

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-1.5
3	-1

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	12.0 17.9
BALANCED	--- ---
EYE AREA-	34.4 SQ. IN.

RPM	1175
ENCLOSED IMPELLER	
N _s =	3020

PUMP	15H277
CURVE NO.	EC-2391