


NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

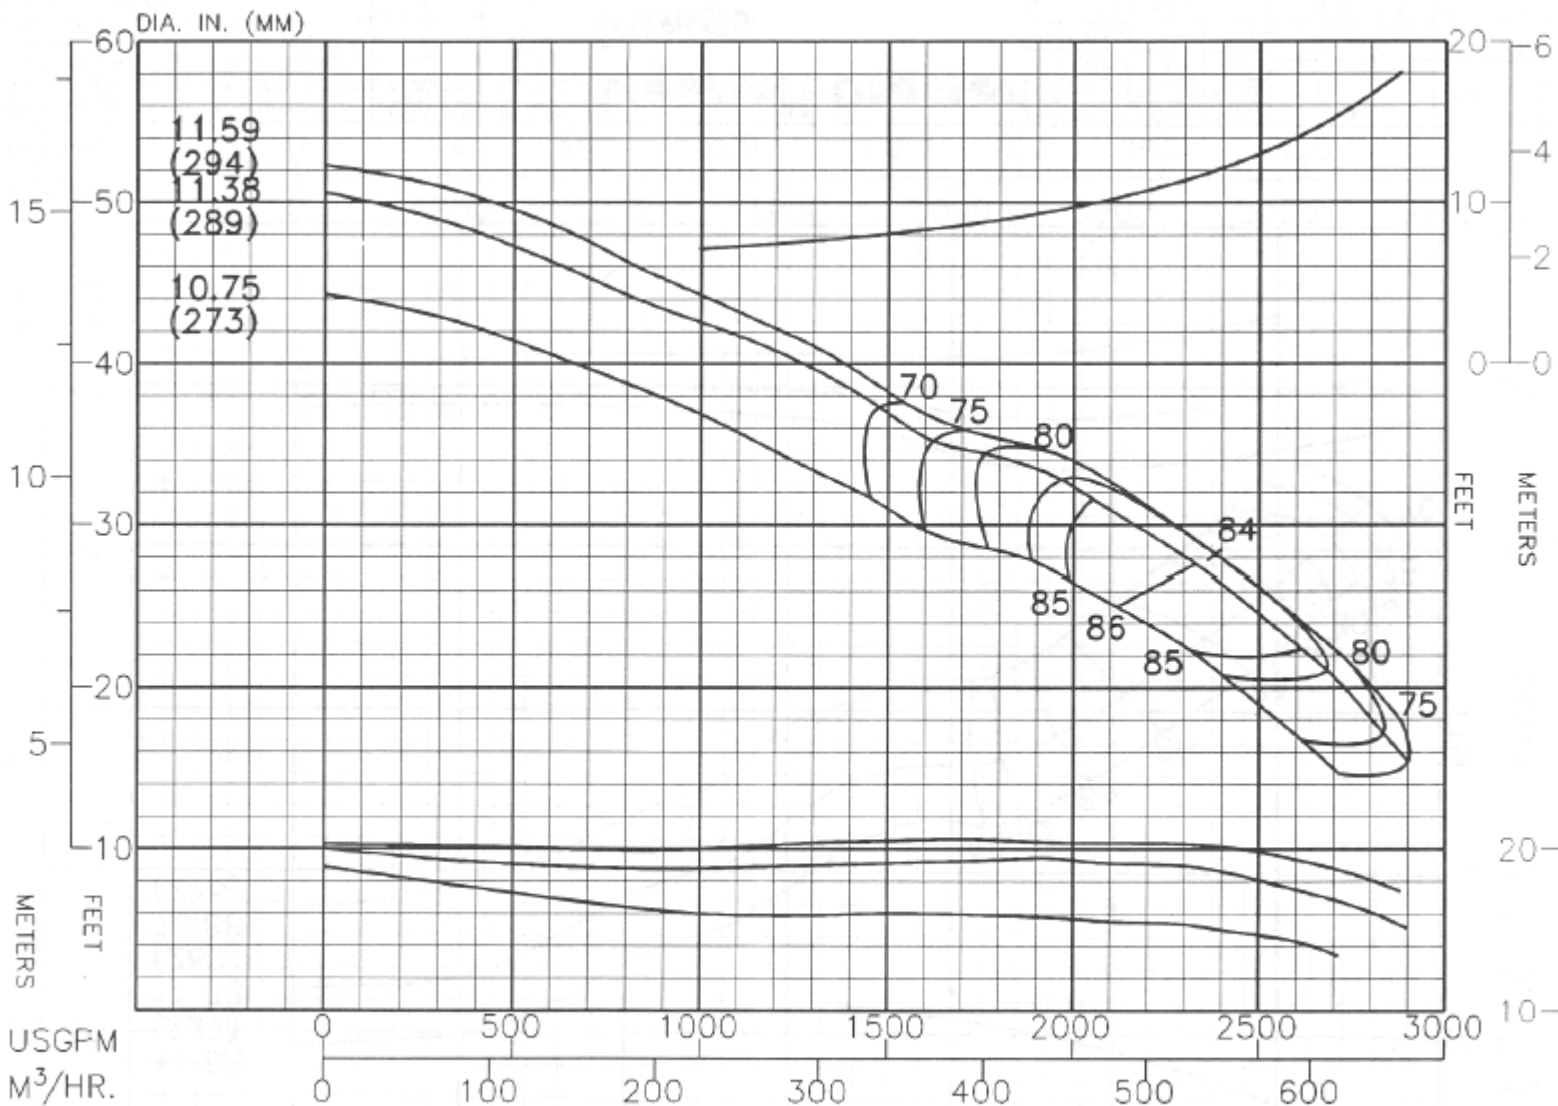

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE	IN EFF.
STAGES	POINTS
1	-3
2	-2
3	-1
4	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	19.3 28.8
BALANCED	--- ---
EYE AREA - 53.6 SQ. IN.	

RPM
1175
ENCLOSED IMPELLER
N _s = 4700

PUMP
15HH340
CURVE NO.
EC-2429

BOWL HEAD PER STAGE

Ingersoll-Dresser Pump Company

PERFORMANCE