


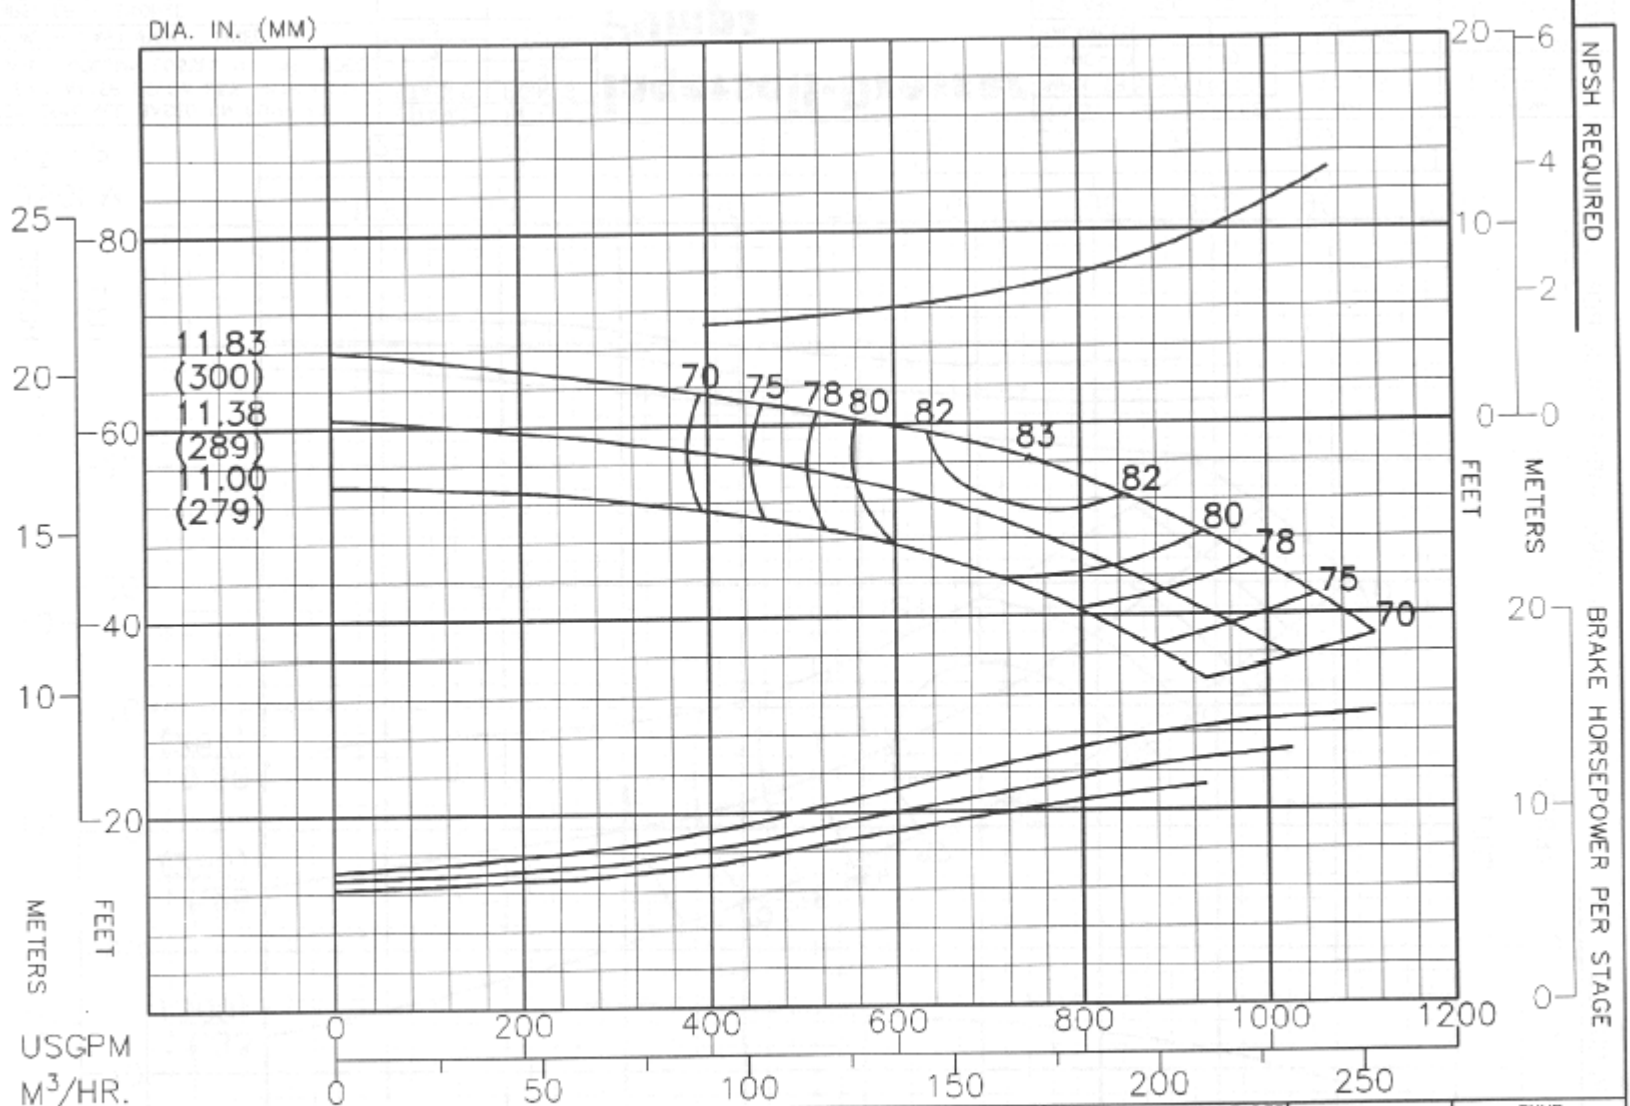

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-1.5
3	-1

Ingersoll-Dresser **Pumps**

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KC/M
STANDARD	4.97 7.41
BALANCED	---
EYE AREA	19.0 SQ. IN.

RPM
1175
ENCLOSED IMPELLER
N _s = 1560

PUMP
15L110
CURVE NO.
EC-2407