


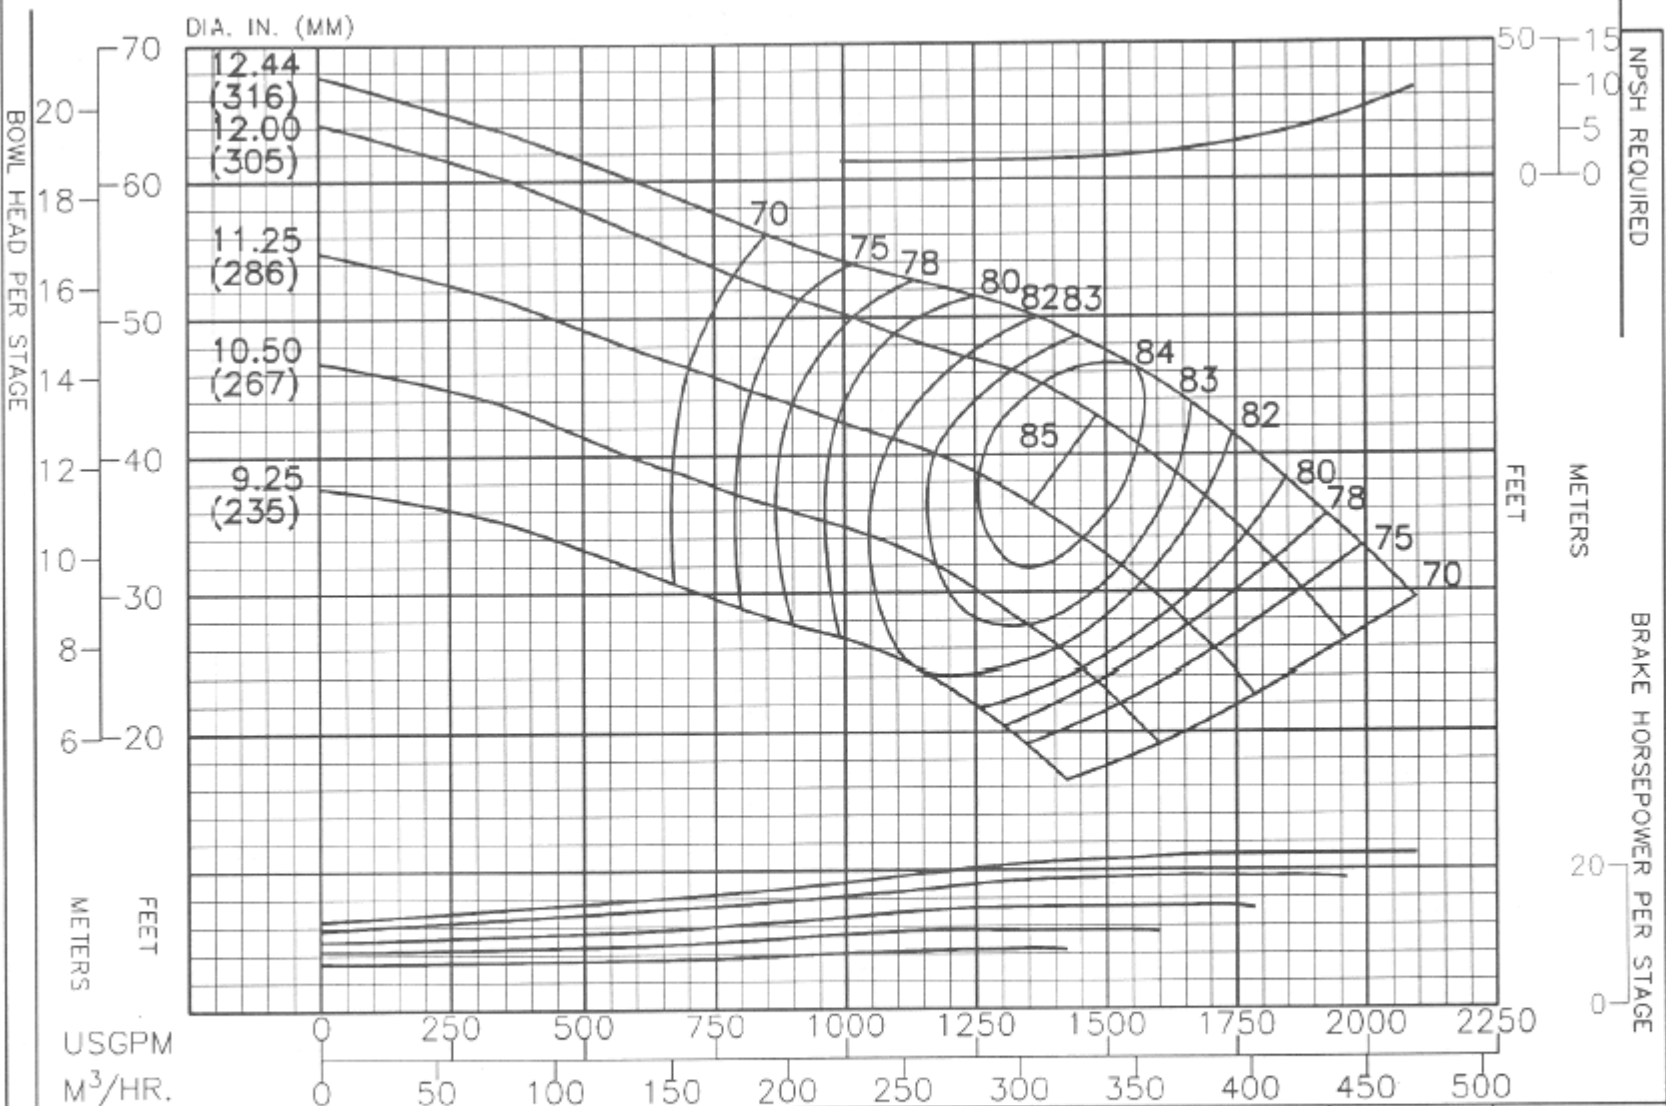

PERFORMANCE BASED ON PUMPING
 CLEAR WATER BELOW 85°F. WITH LISTED
 MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED	CHANGE IN EFF.
IMPELLER - BRONZE	STAGES POINTS
	1 -1
	2 0
	3 0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	11.4 17.0
BALANCED	4.5 6.7
EYE AREA—31.3 SQ. IN.	

RPM	1175
ENCLOSED IMPELLER	
N _s = 2610	

PUMP	16KKH
CURVE NO.	EC-1400