


BOWL HEAD PER STAGE

Ingersoll-Dresser Pump Company

PERFORMANCE

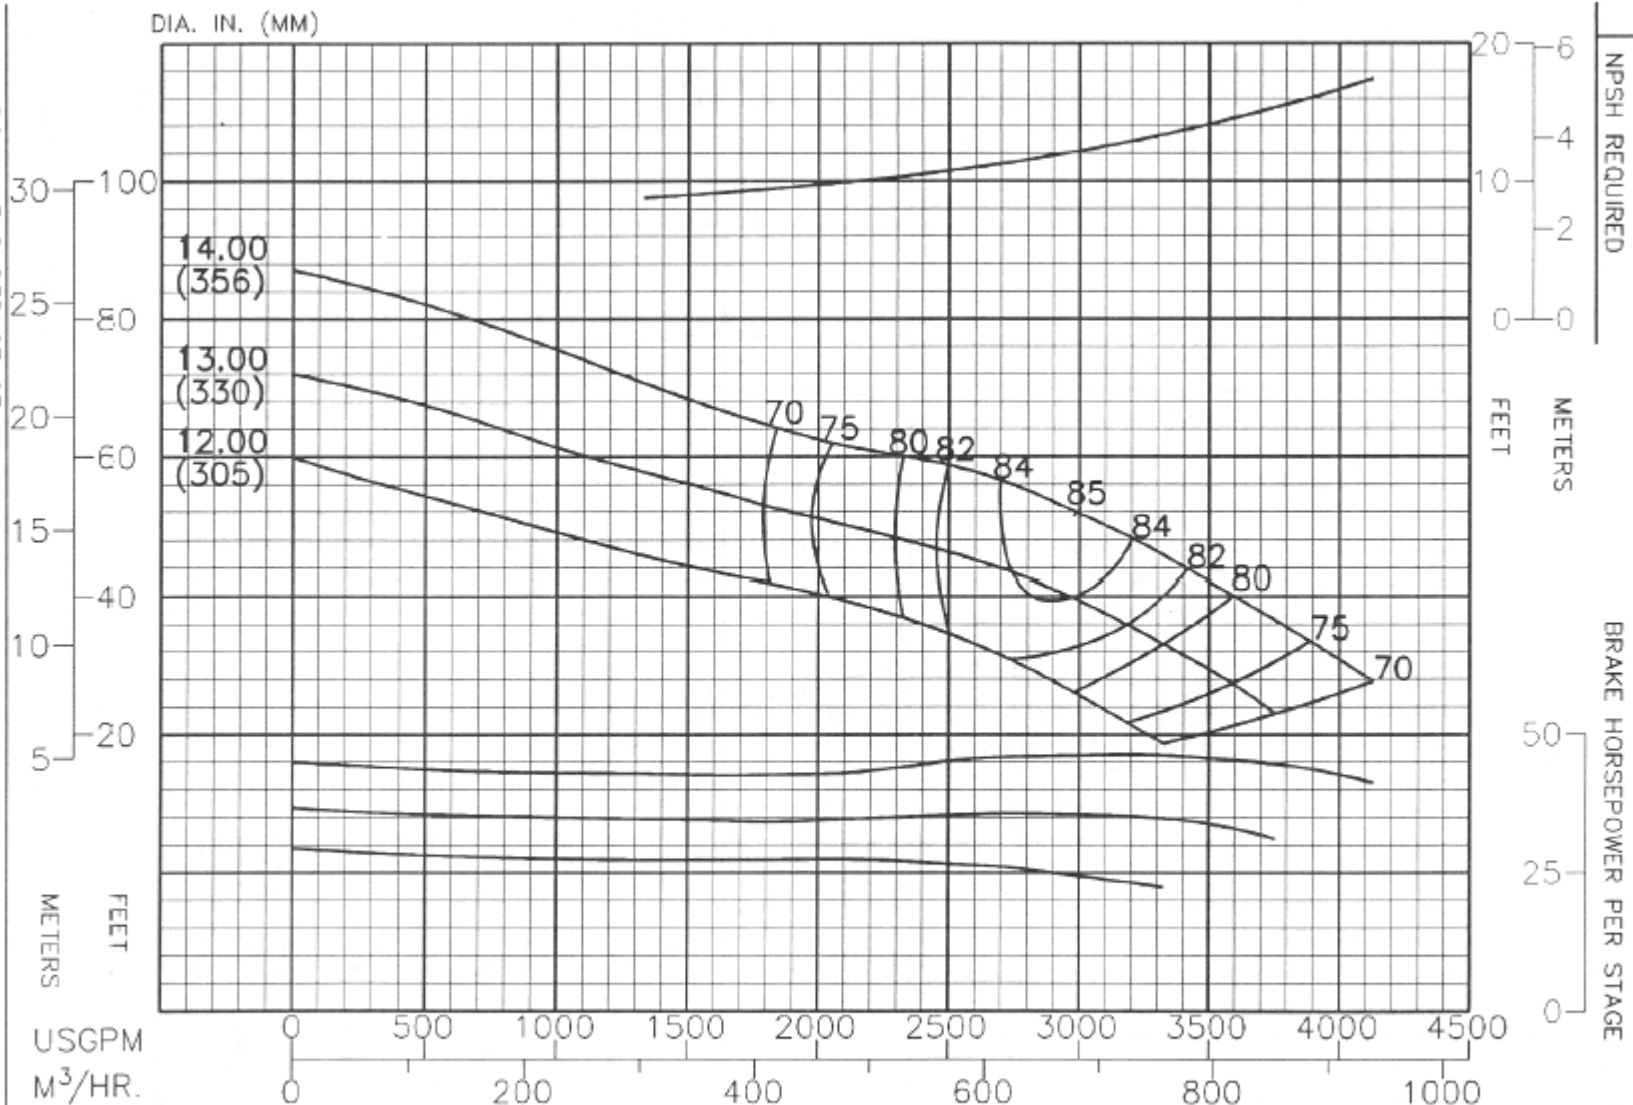

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATLS. COLUMN LOSSES NOT INCLUDED.	CHANGE	IN EFF.	Ingersoll-Dresser Pumps	THRUST FACTORS AT BEP		RPM	PUMP
	STAGES	POINTS				1180	18H500
	1	-1.5				IMPELLER LBS/FT KG/M	CURVE NO.
	2	-1.5				STANDARD 21.1 31.4	EC-2393
BOWL - CAST IRON	3	-1			BALANCED --- ---	ENCLOSED IMPELLER	
IMPELLER - BRONZE					EYE AREA- 68.0 SQ. IN.	N _s = 3340	