


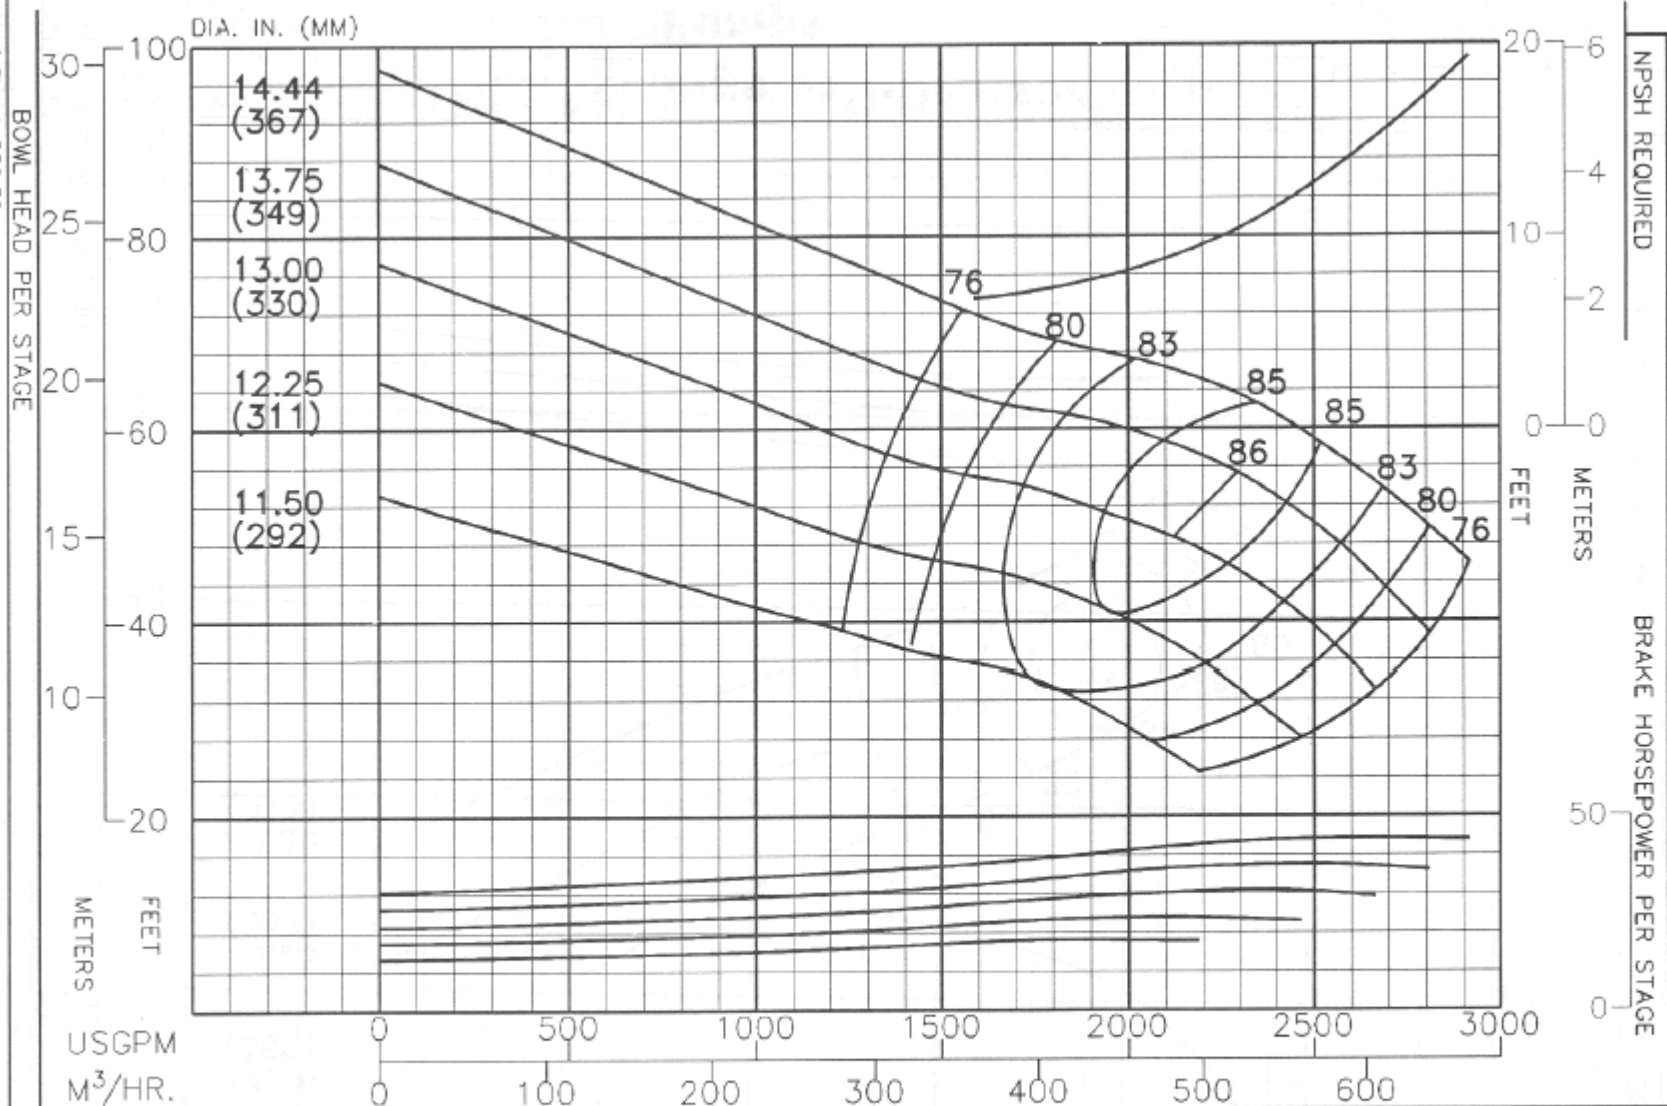

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-2
2	-1
3	0

Ingersoll-Dresser **Pumps**

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	14.6 21.8
BALANCED	5.8 8.7
EYE AREA-47.3 SQ. IN.	

RPM
1180
ENCLOSED IMPELLER
N _s = 2680

PUMP
18KKH
CURVE NO.
EC-1449