


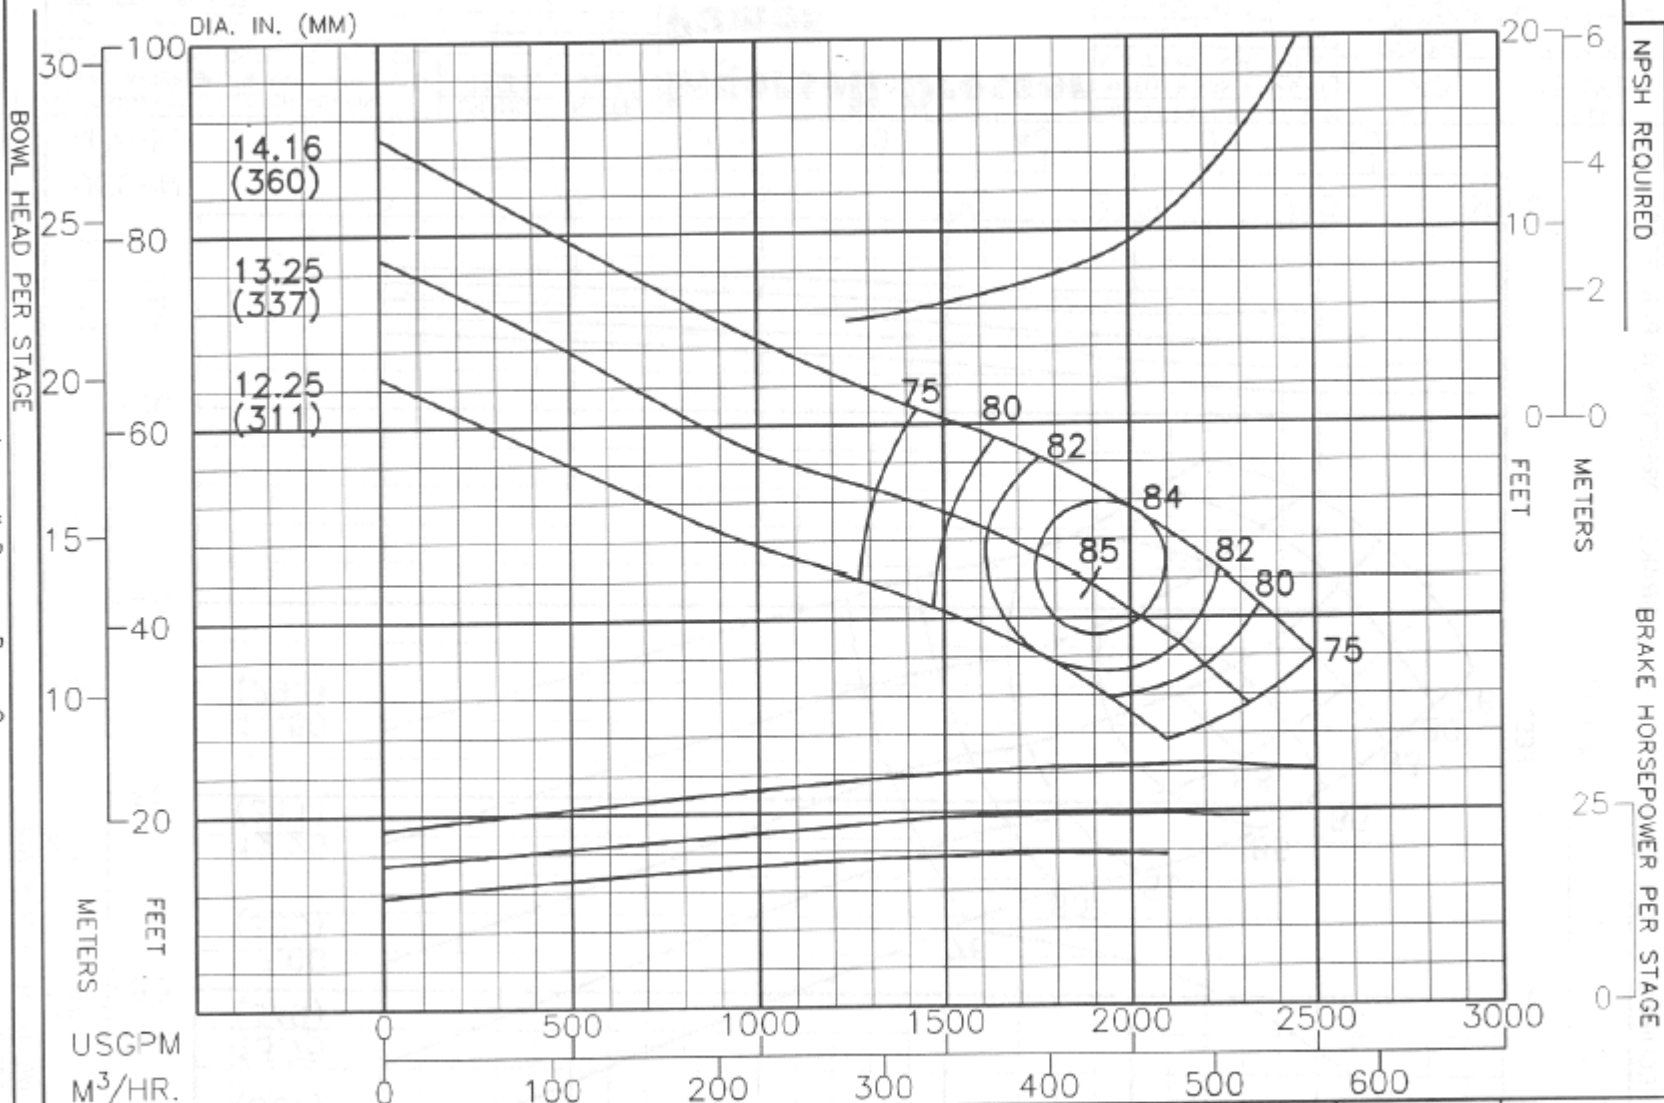

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE	IN EFF.
STAGES	POINTS
1	-2
2	-1
3	0

**Ingersoll-Dresser
Pumps**

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	16.3	24.3
BALANCED	5.8	8.7
EYE AREA-47.3 SQ. IN.		

RPM
1180
ENCLOSED IMPELLER
N _s = 2820

PUMP
18KKL
CURVE NO.
EC-1446