


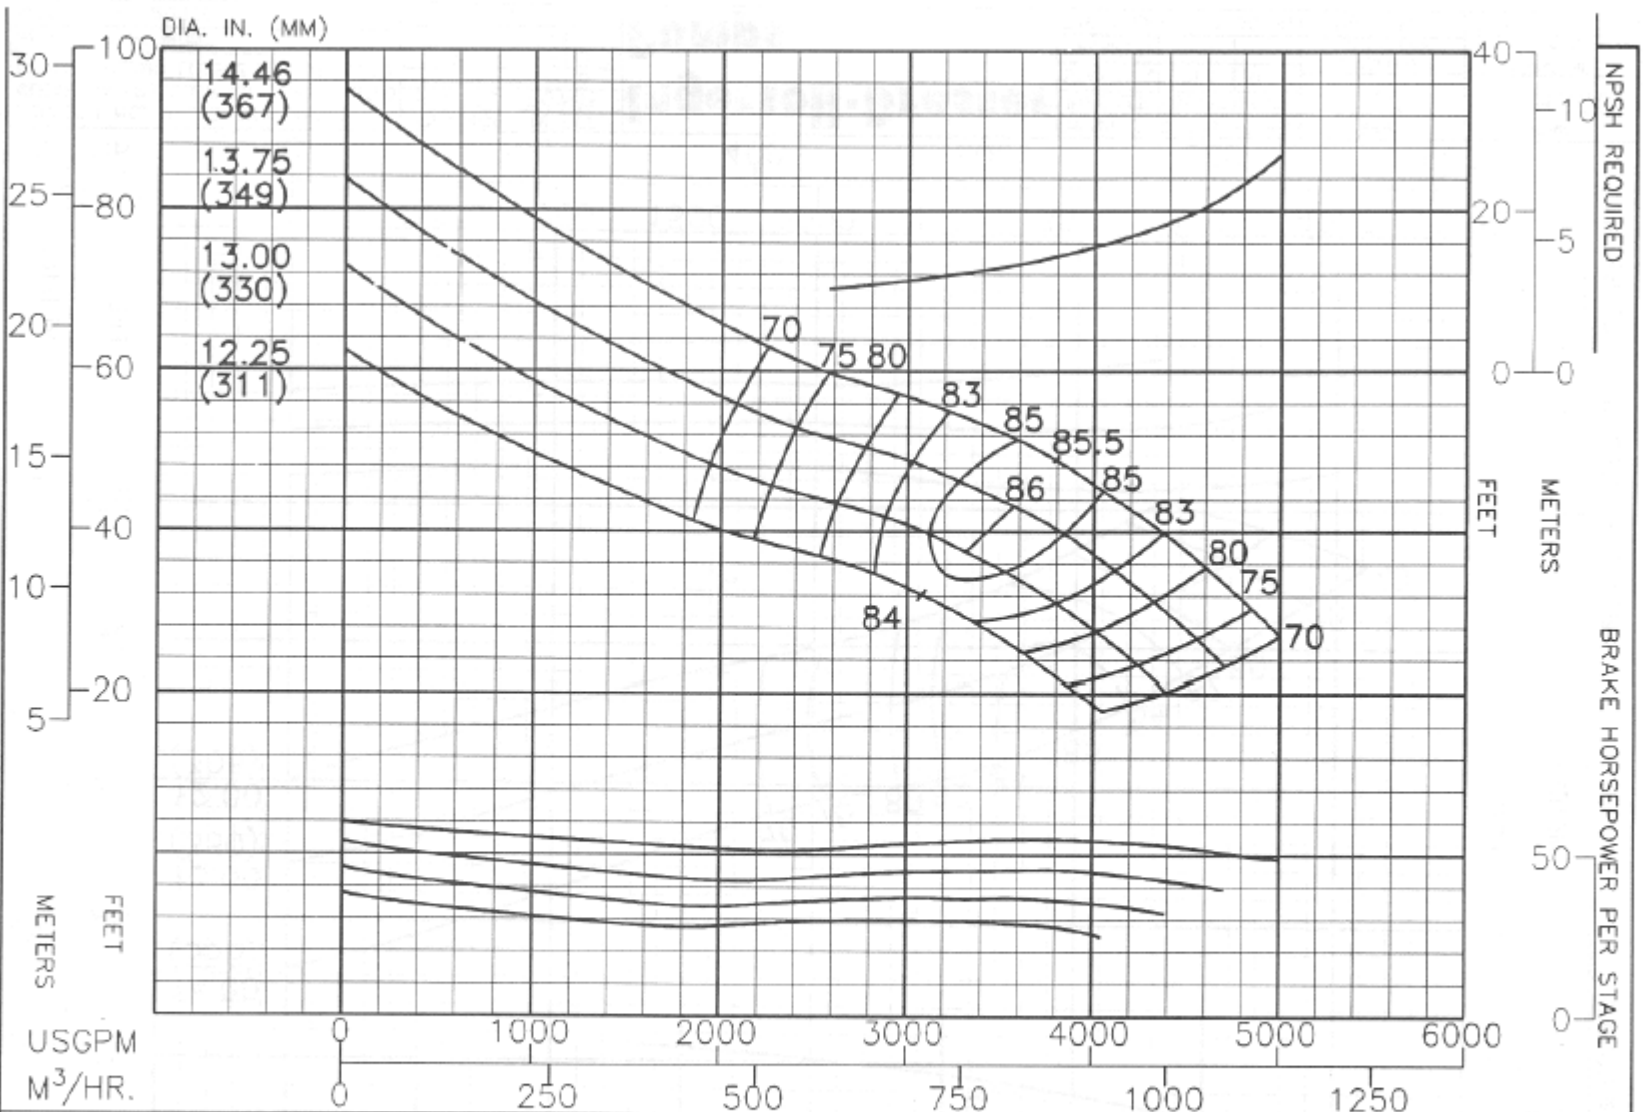

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-1
2	0

**Ingersoll-Dresser
Pumps**

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	23.2 34.6
BALANCED	15.7 23.4
EYE AREA	62.4 SQ. IN.

RPM	1180
ENCLOSED IMPELLER	
N _s	3930

PUMP	18NKL
CURVE NO.	EC-1454