


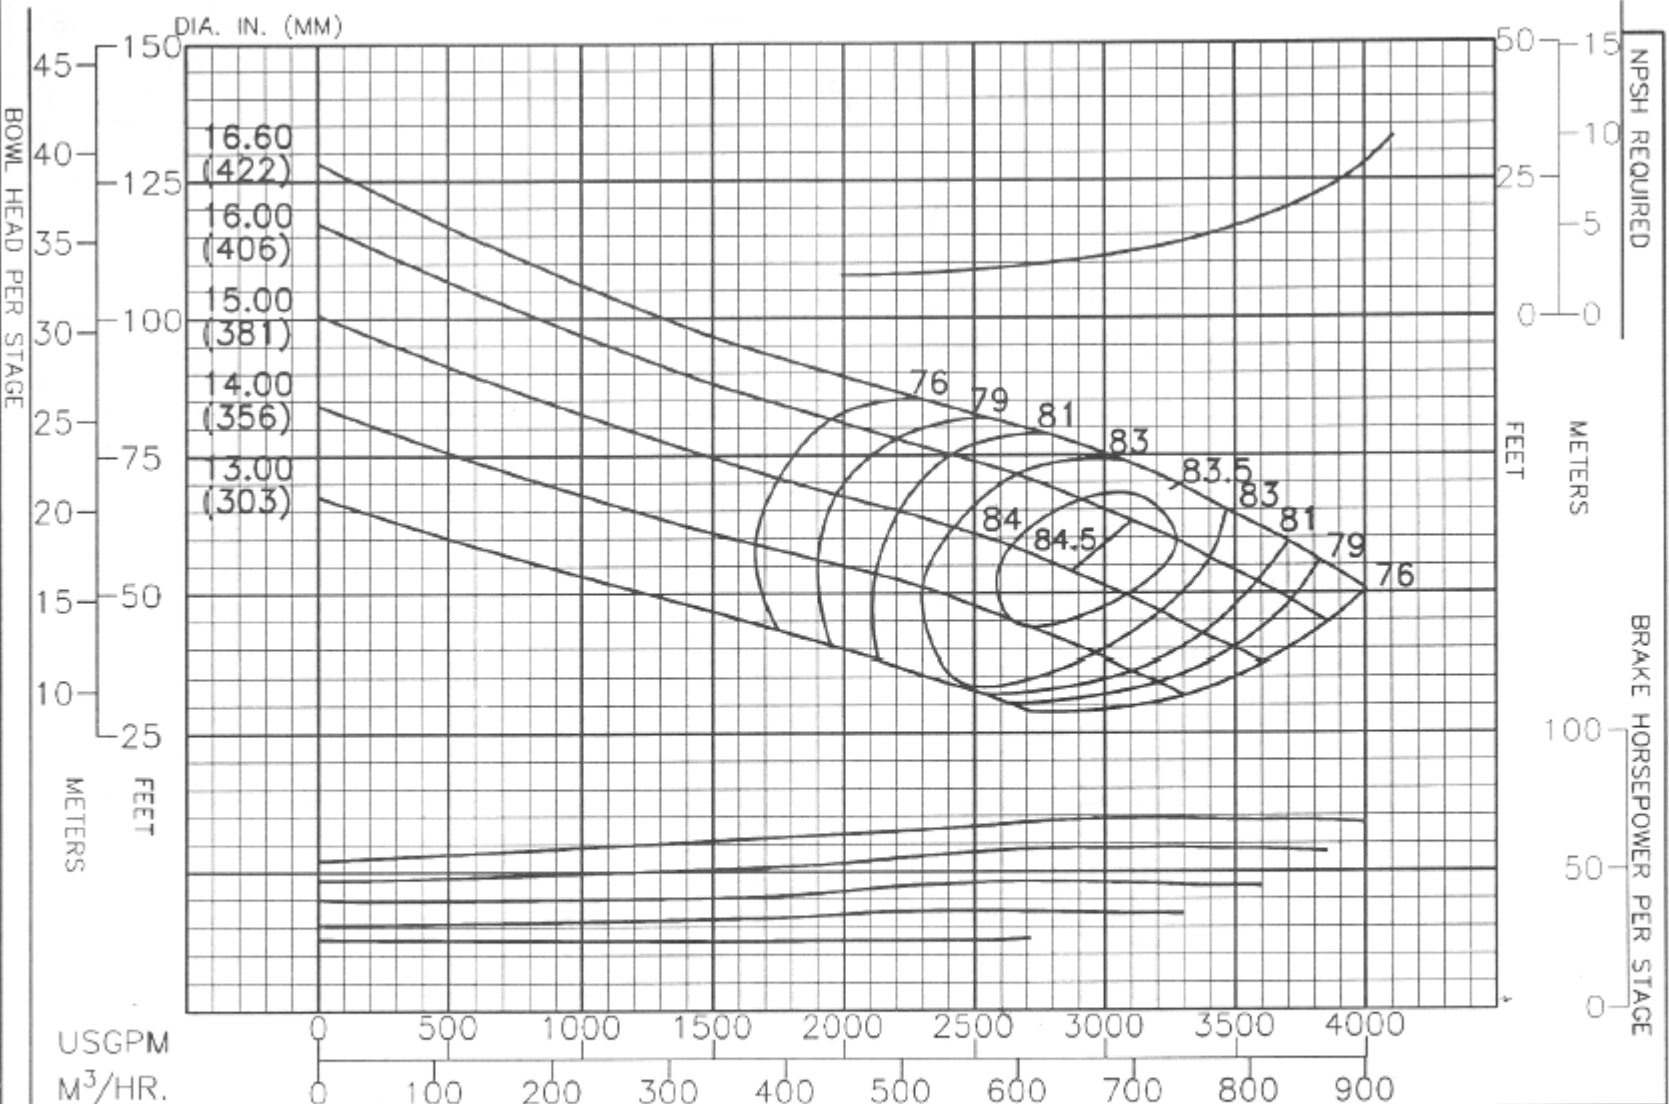

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-2
2	-1
3	0

**Ingersoll-Dresser
Pumps**

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	21.1 31.4
BALANCED	9.9 14.8
EYE AREA-60.5 SQ. IN.	

RPM
1180
ENCLOSED IMPELLER
N _s = 2800

PUMP
20KKL
CURVE NO.
EC-1368