


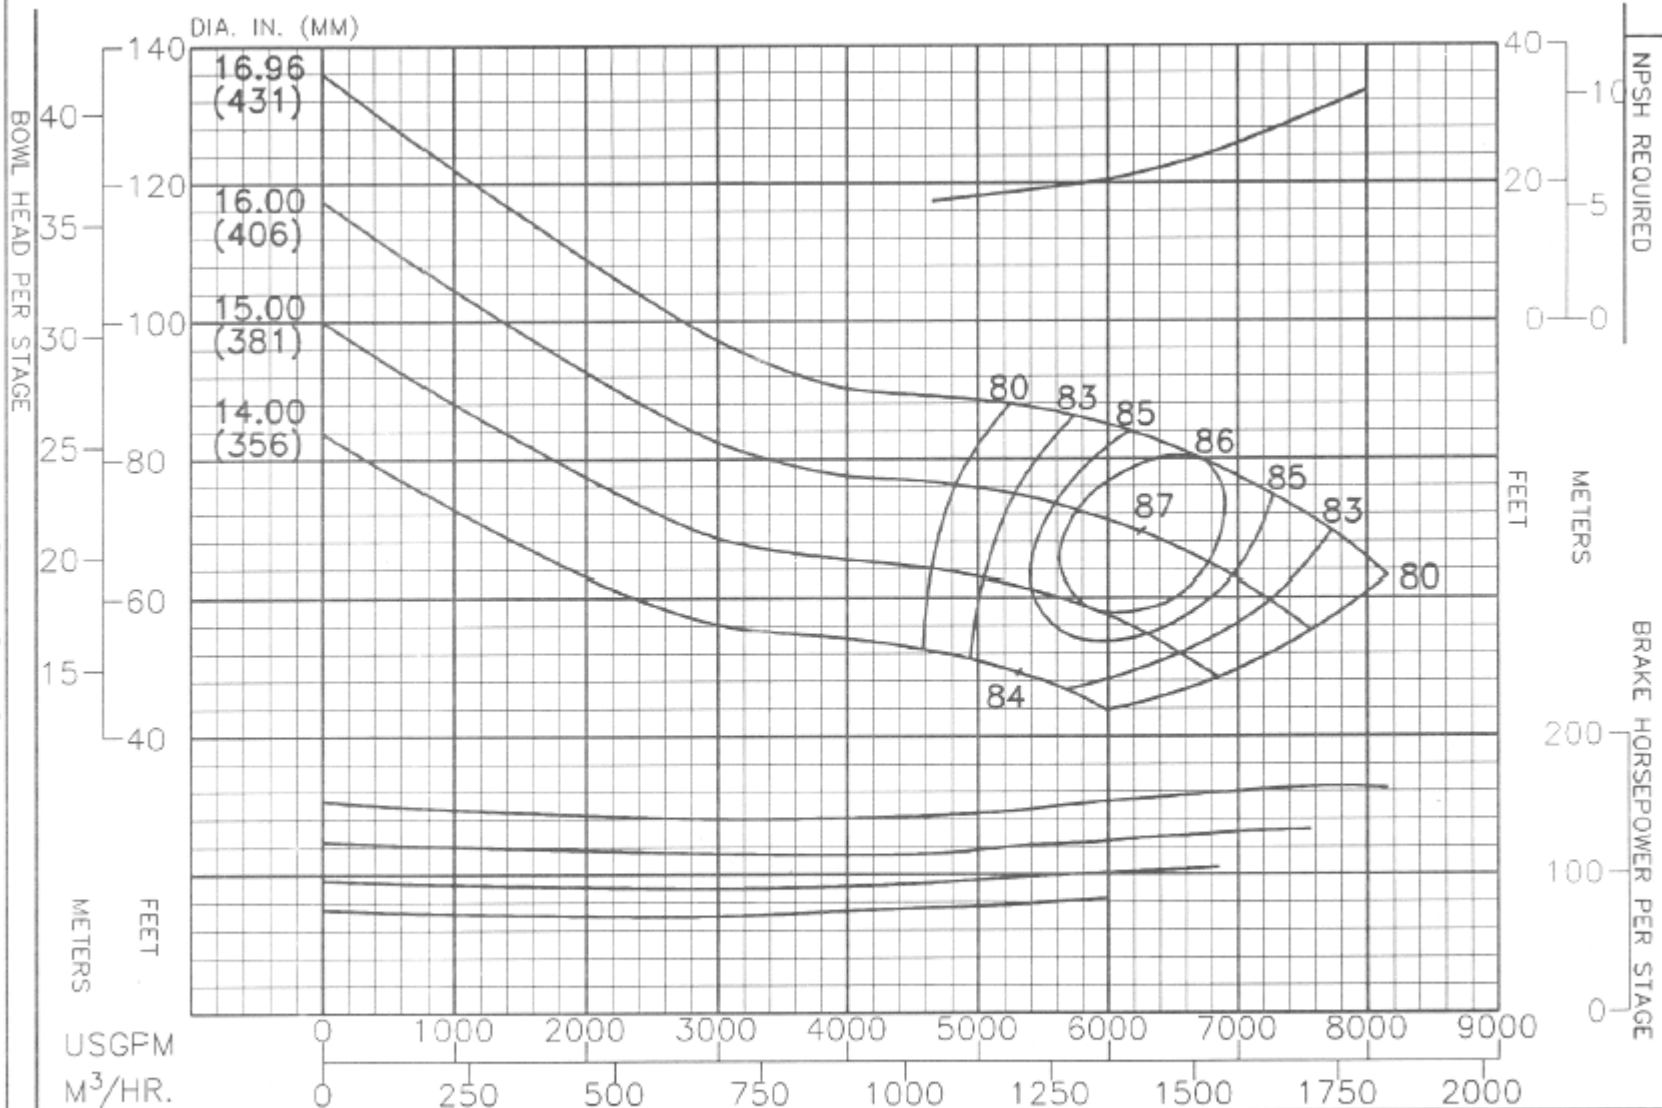

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE	IN EFF.
STAGES	POINTS
1	0
2	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS./FT. KC/M
STANDARD	29.5 44.0
BALANCED	22.4 33.4
EYE AREA-87.8 SQ. IN.	

RPM
1180
ENCLOSED IMPELLER
N _s = 3620

PUMP
20NKH
CURVE NO.
EC-1395