


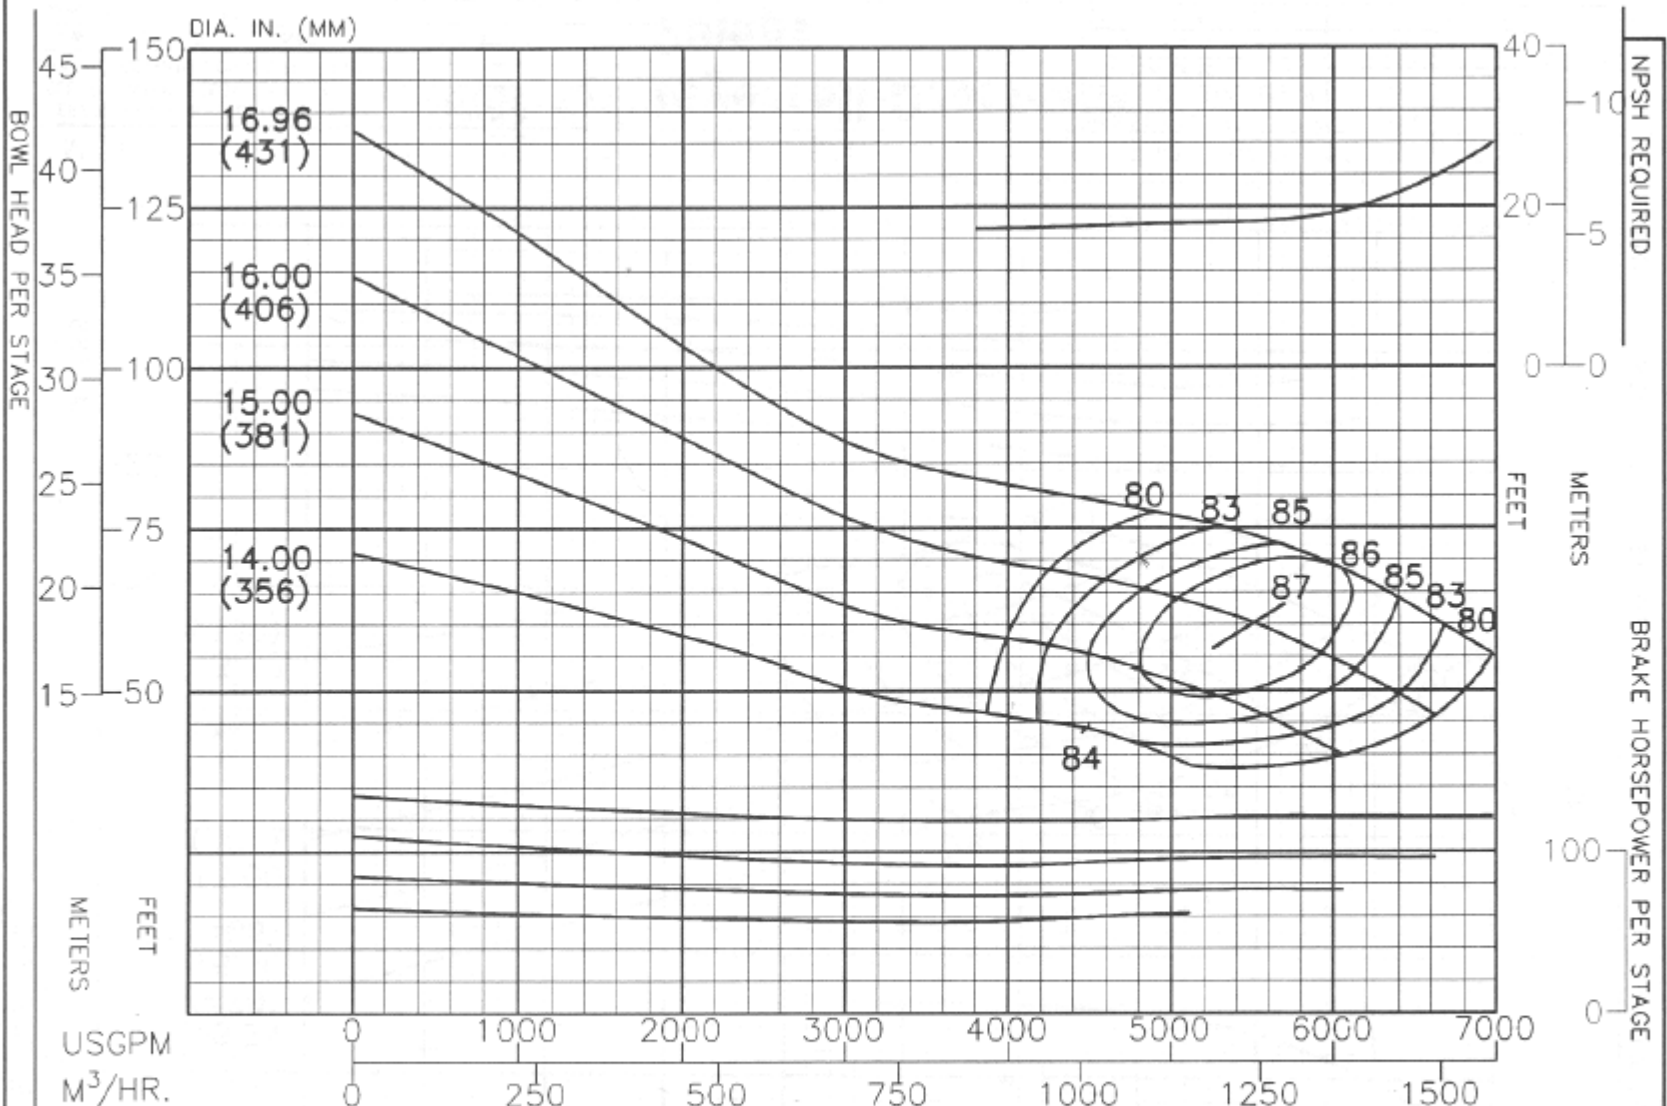

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATLS. COLUMN LOSSES NOT INCLUDED. BOWL - CAST IRON - LINED IMPELLER - BRONZE	CHANGE	IN EFF.	Ingersoll-Dresser Pumps	THRUST FACTORS AT BEP IMPELLER LBS/FT KG/M STANDARD 31.0 46.2 BALANCED 22.4 33.4 EYE AREA-87.8 SQ. IN.	RPM 1180 ENCLOSED IMPELLER N _s = 3630	PUMP 20NKL CURVE NO. EC-1397
	STAGES	POINTS				
	1	0				
	2	0				