


NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

BOWL HEAD PER STAGE

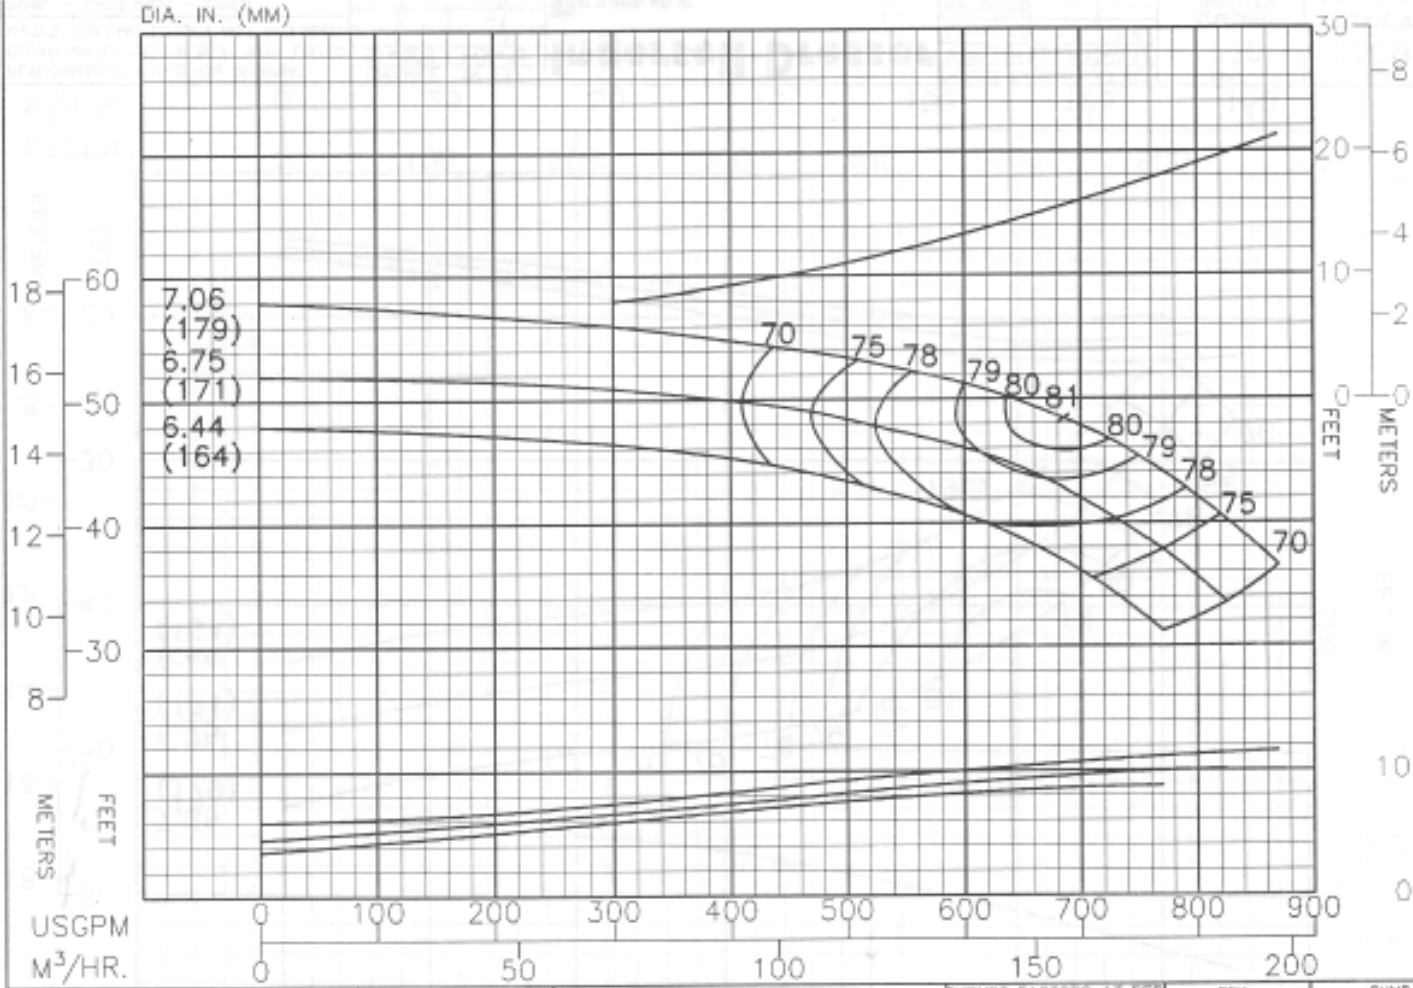

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - UNED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-5
2	-2
3	0

Ingersoll-Dresser Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	7.5 11.2
BALANCED	--- ---
EYE AREA-12.4 SQ. IN.	

RPM
1770
SEMIOPEN IMPELLER
N _s = 2750

PUMP
10CH
CURVE NO.
EC-1472