


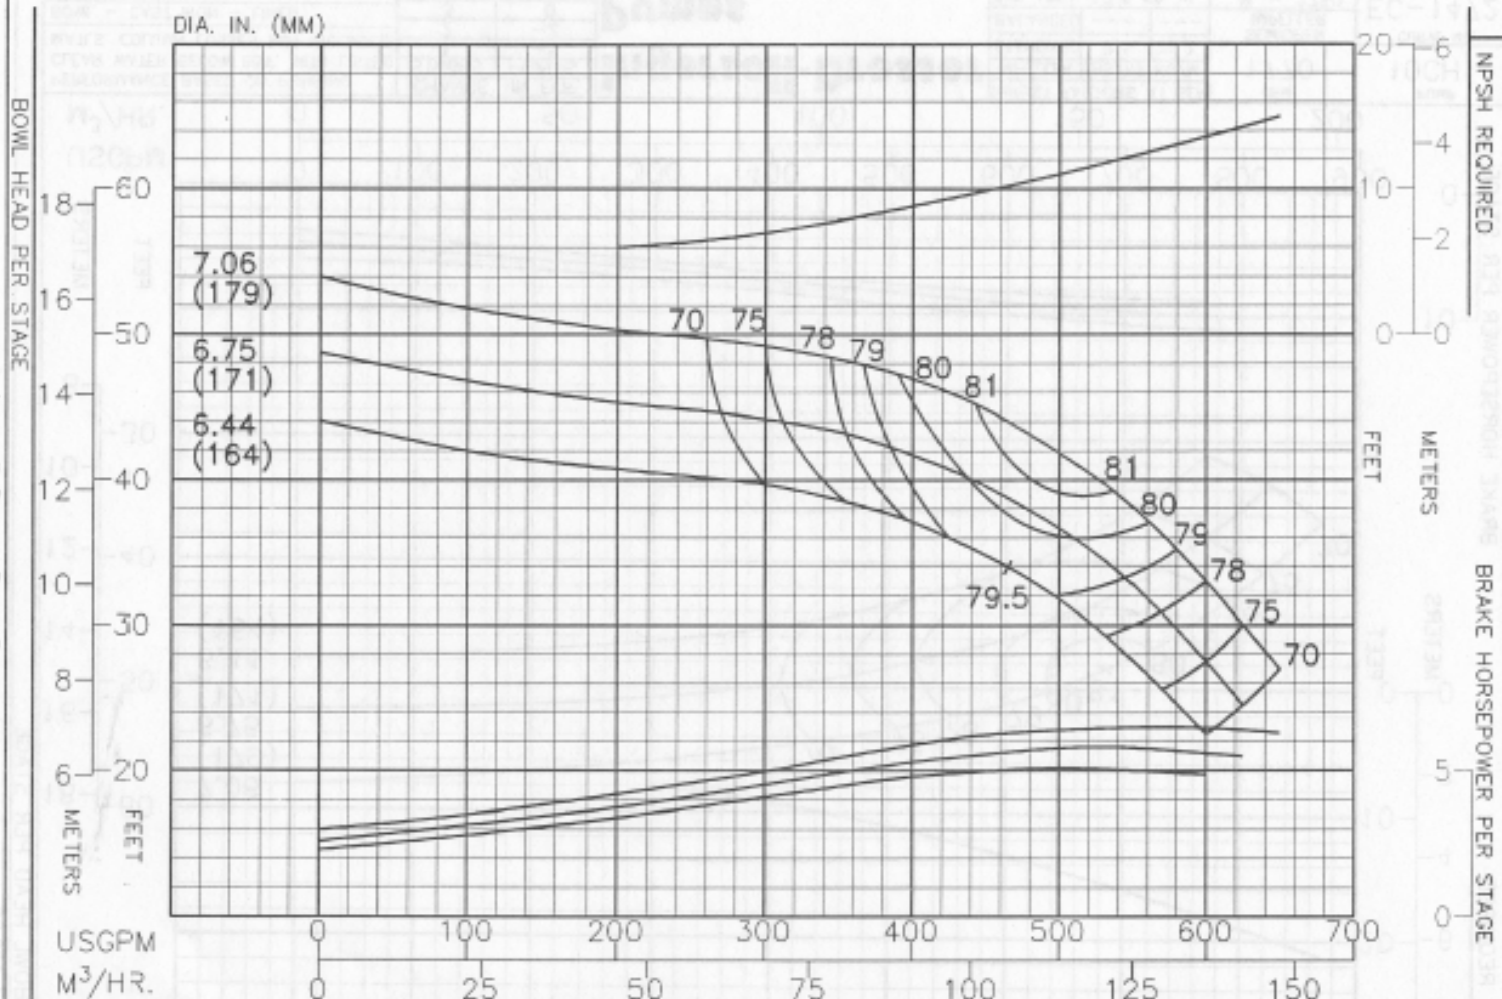

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.
BOWL - CAST IRON - UNED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-1
3	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	7.7 11.5
BALANCED	--- ---
EYE AREA-12.4 SQ. IN.	

RPM	1770
SEMIOPEN IMPELLER	N _s = 2385

PUMP	10CM
CURVE NO.	EC-1471