


BOWL HEAD PER STAGE

Ingersoll-Dresser Pump Company

PERFORMANCE

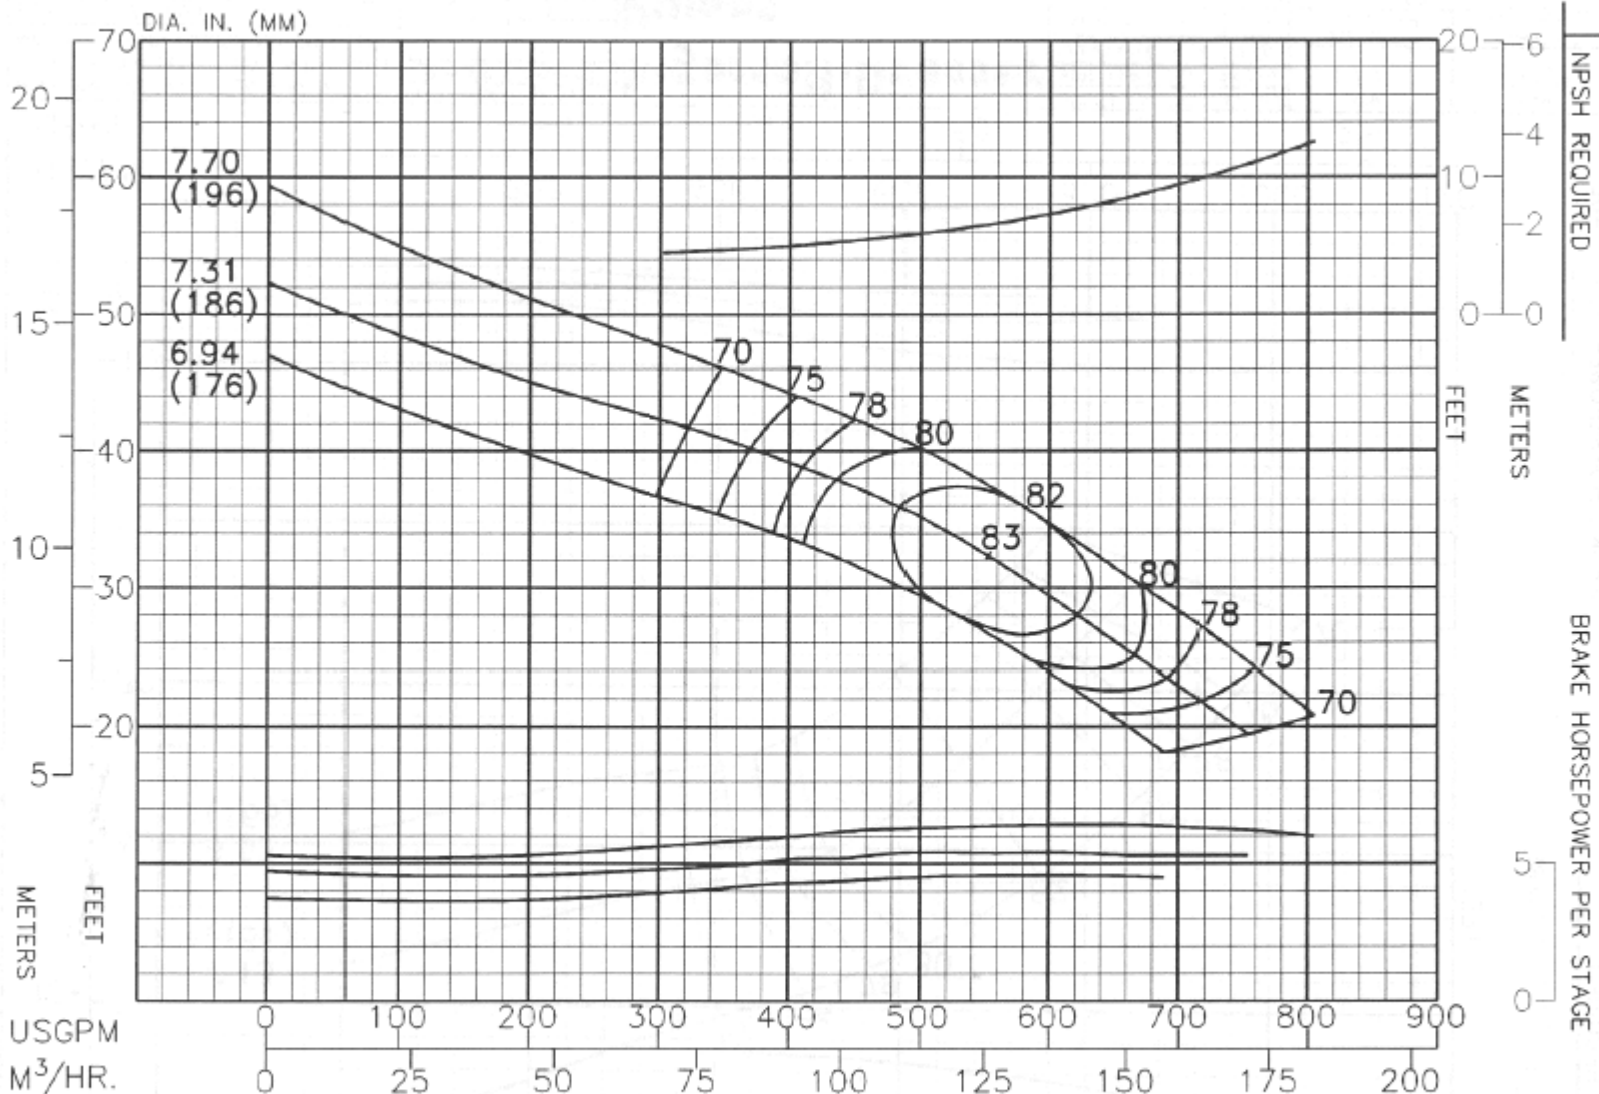

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATLS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-2
3	-1

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	IMPELLER LBS/FT	KG/M
STANDARD	5.34	7.96
BALANCED	---	---
EYE AREA	14.3	SQ. IN.

RPM	1770
ENCLOSED IMPELLER	N _s = 2920

PUMP	10H61
CURVE NO.	EC-2386