


NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

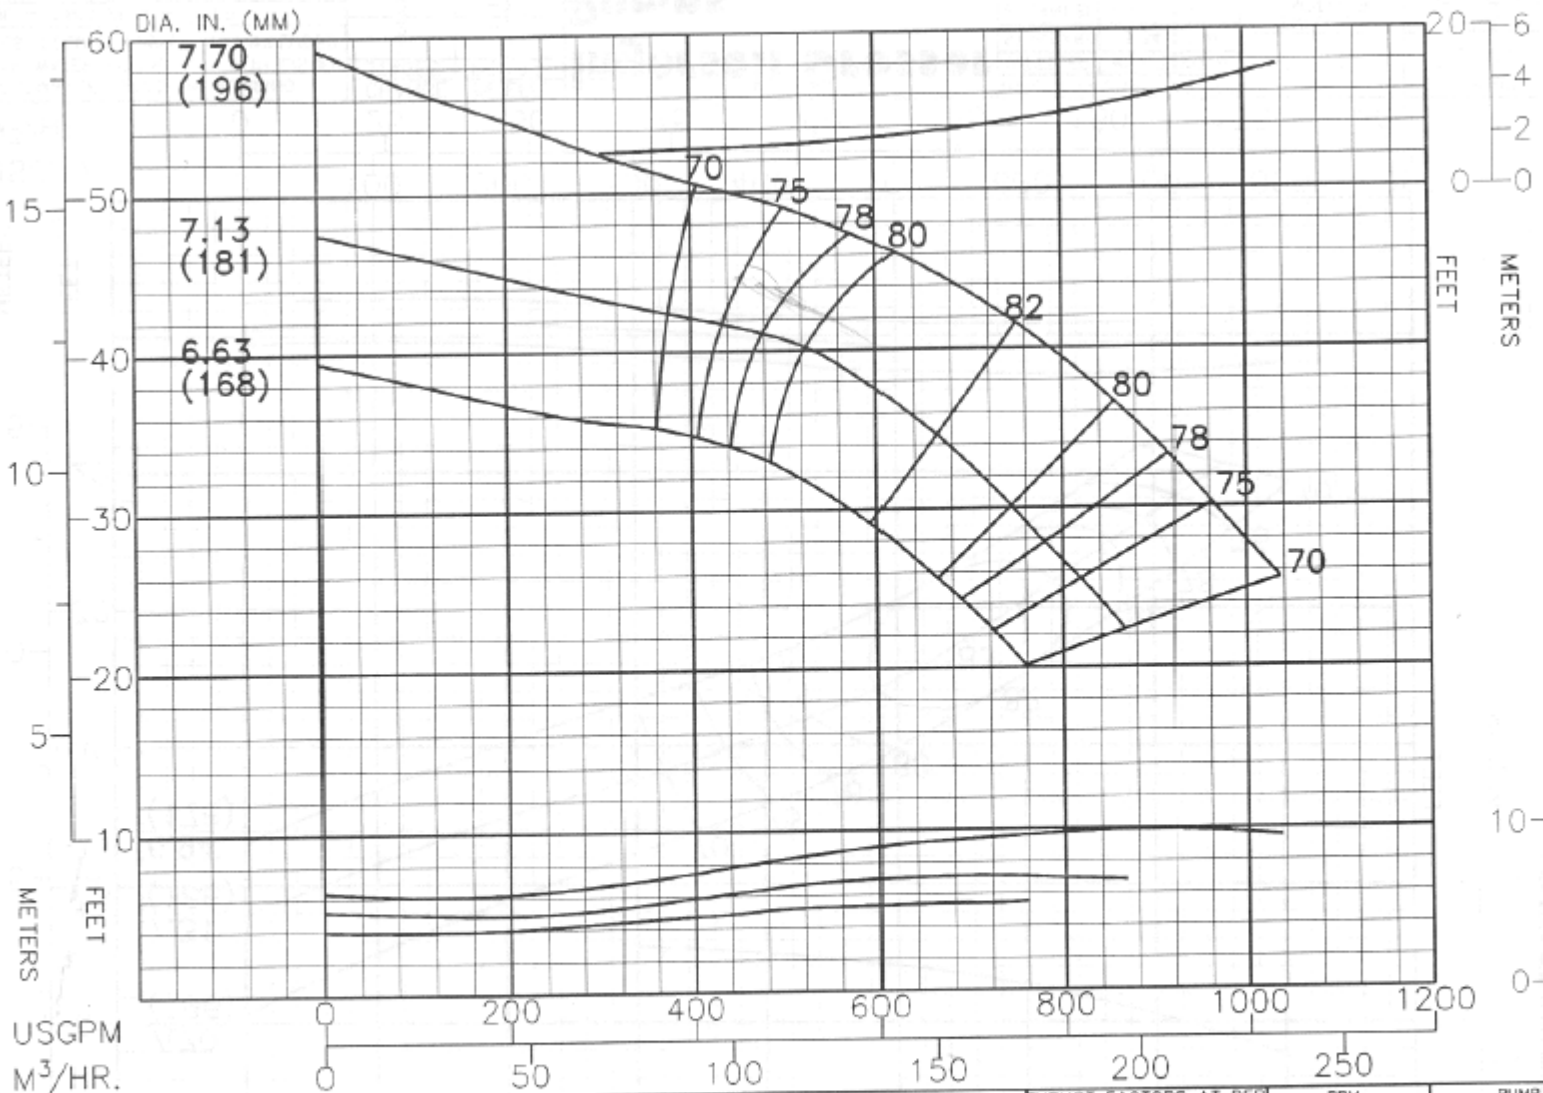

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED.

BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-2
2	-1
3	0

**Ingersoll-Dresser
Pumps**

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	5.14	7.66
BALANCED	---	---
EYE AREA-	14.3	SQ. IN.

RPM
1770
ENCLOSED IMPELLER
N _s = 2960

PUMP
10H75
CURVE NO.
EC-2387