


NPSH REQUIRED

BRAKE HORSEPOWER PER STAGE

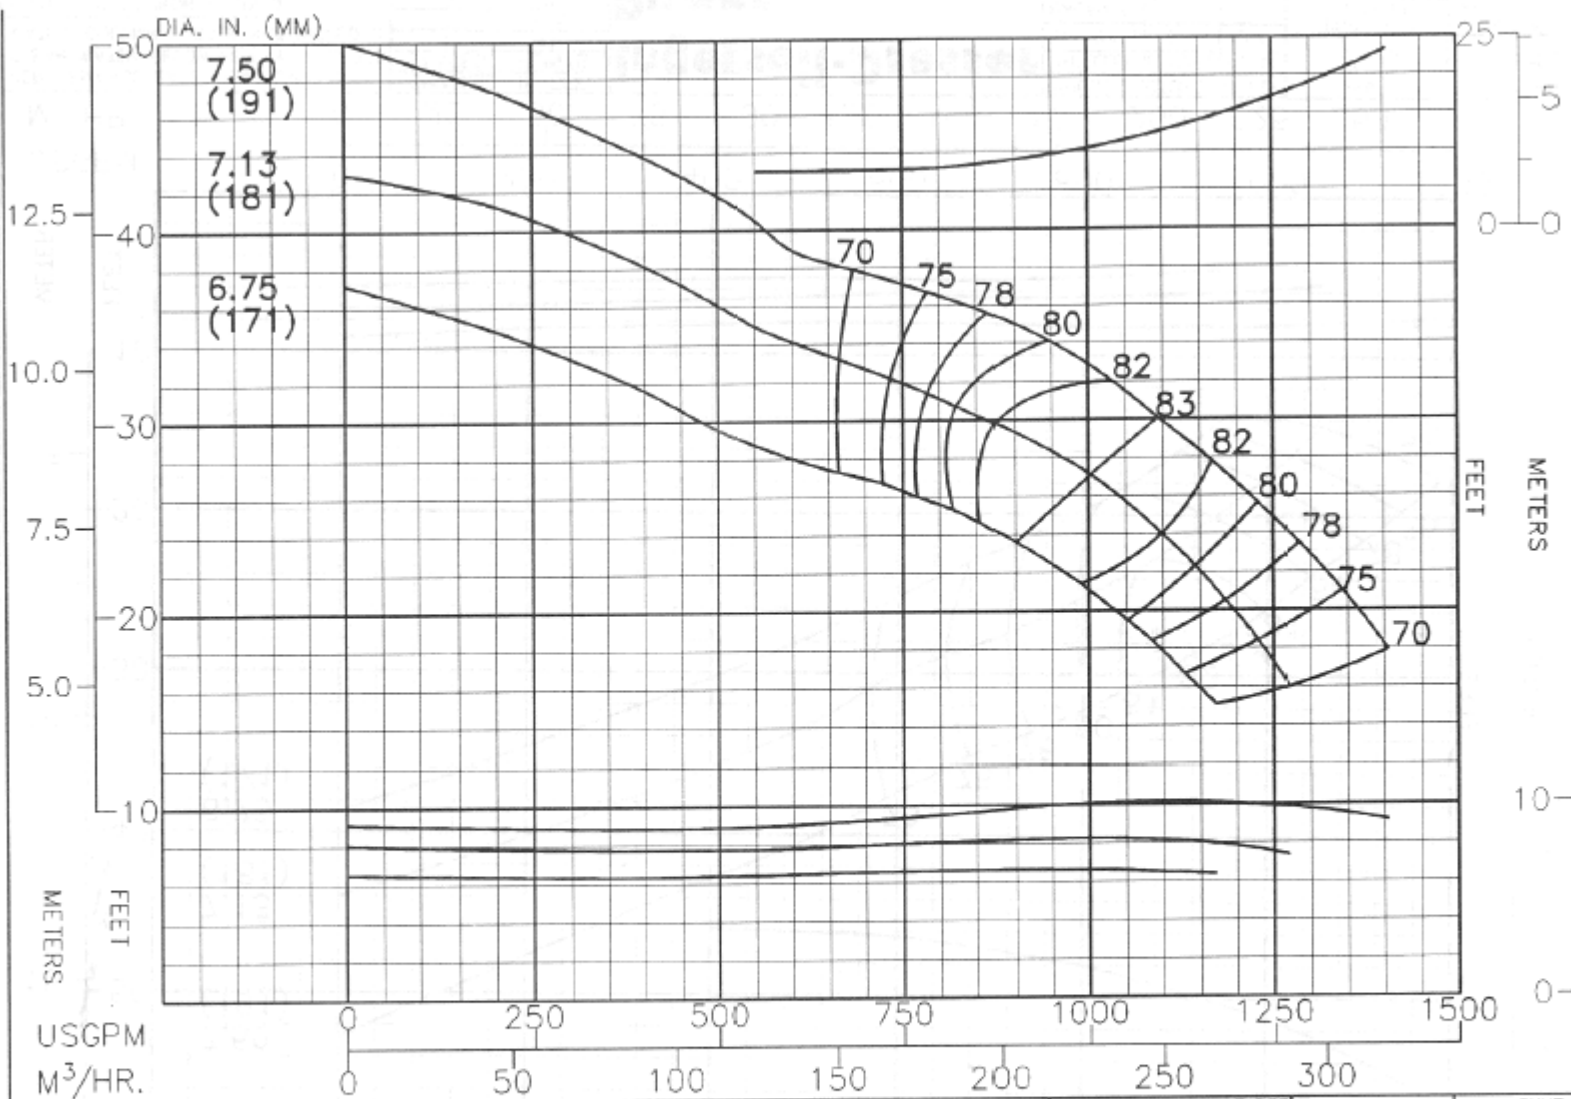

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMN LOSSES NOT INCLUDED

BOWL - CAST IRON - LINED

IMPELLER - BRONZE

CHANGE	IN EFF.
STAGES	POINTS
1	-1.5
2	-1
3	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP	
IMPELLER	LBS/FT KG/M
STANDARD	8.2 12.2
BALANCED	---
EYE AREA- 22.2 SQ. IN.	

RPM	1770
ENCLOSED IMPELLER	---
N _s = 4560	

PUMP	10HH110
CURVE NO.	EC-2418