


BOWL HEAD PER STAGE

Ingersoll-Dresser Pump Company

PERFORMANCE

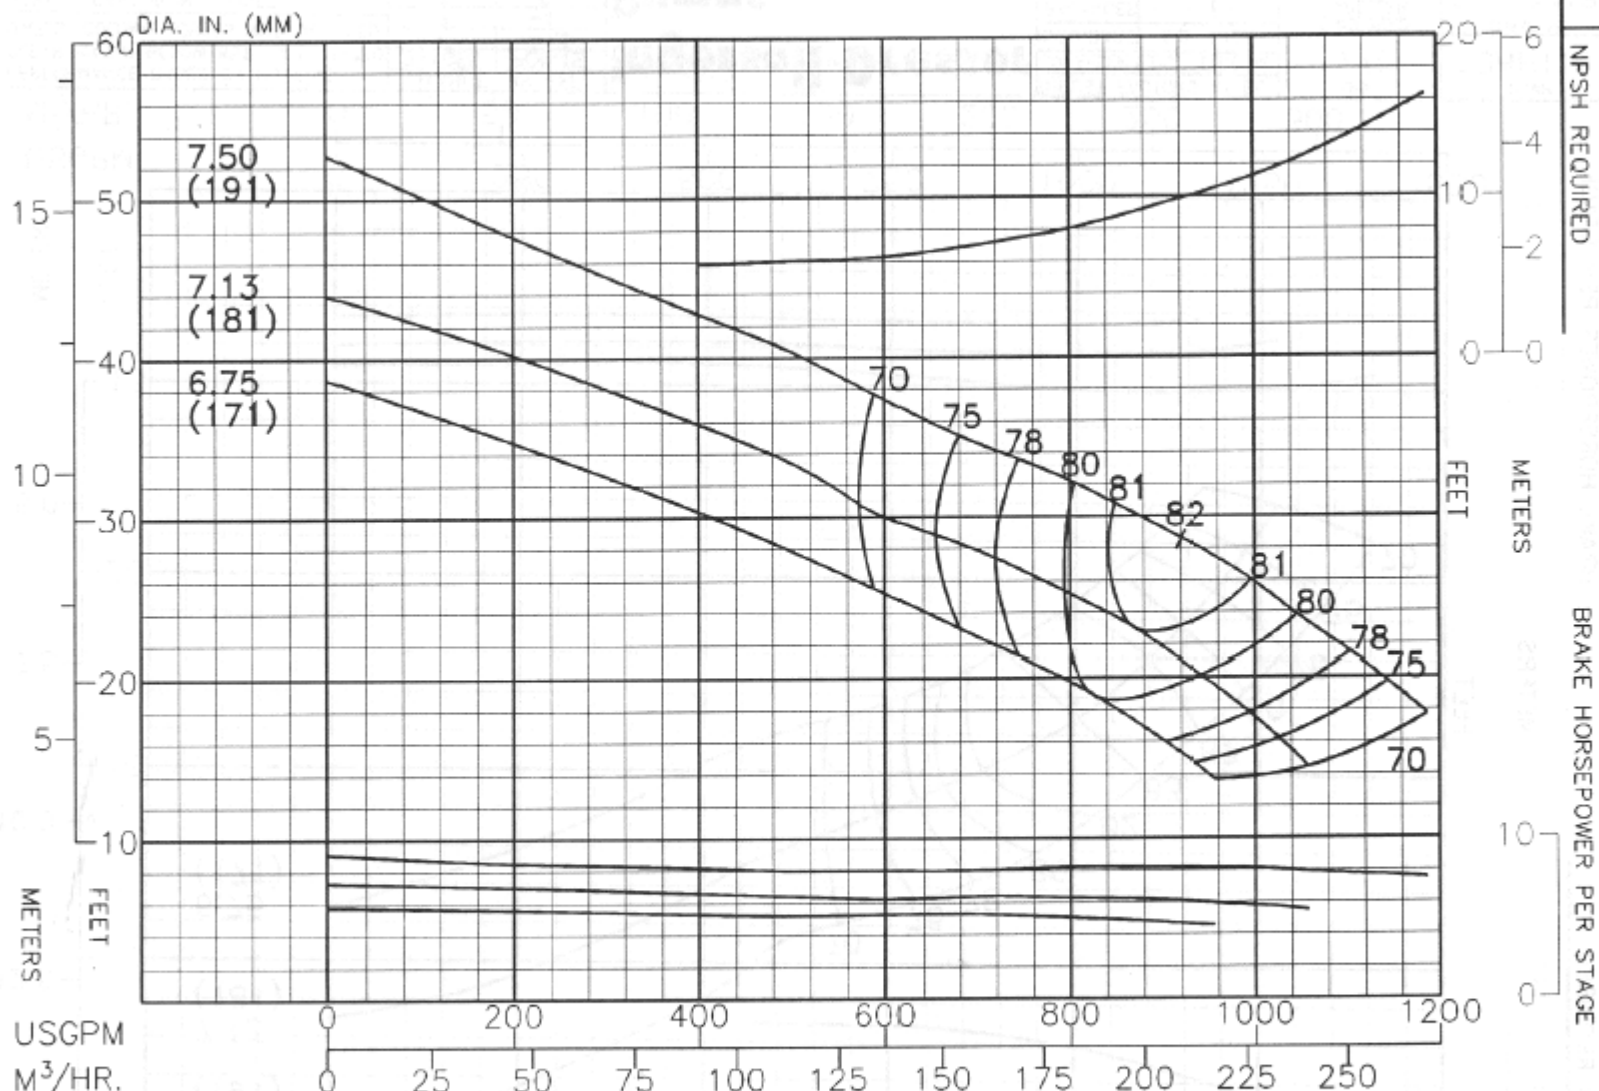

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATLS. COLUMN LOSSES NOT INCLUDED. BOWL - CAST IRON - LINED IMPELLER - BRONZE	CHANGE	IN EFF.	Ingersoll-Dresser Pumps	THRUST FACTORS AT BEP		RPM	PUMP
	STAGES	POINTS		IMPELLER	LBS/FT KG/M	1770	10HH90
	1	-1		STANDARD	8.3 12.4	ENCLOSED IMPELLER	CURVE NO. EC-2417
	2	-5		BALANCED	--- ---		
	3	0		EYE AREA- 22.2 SQ. IN.		N _s = 4340	