


Ingersoll-Dresser Pump Company

PERFORMANCE

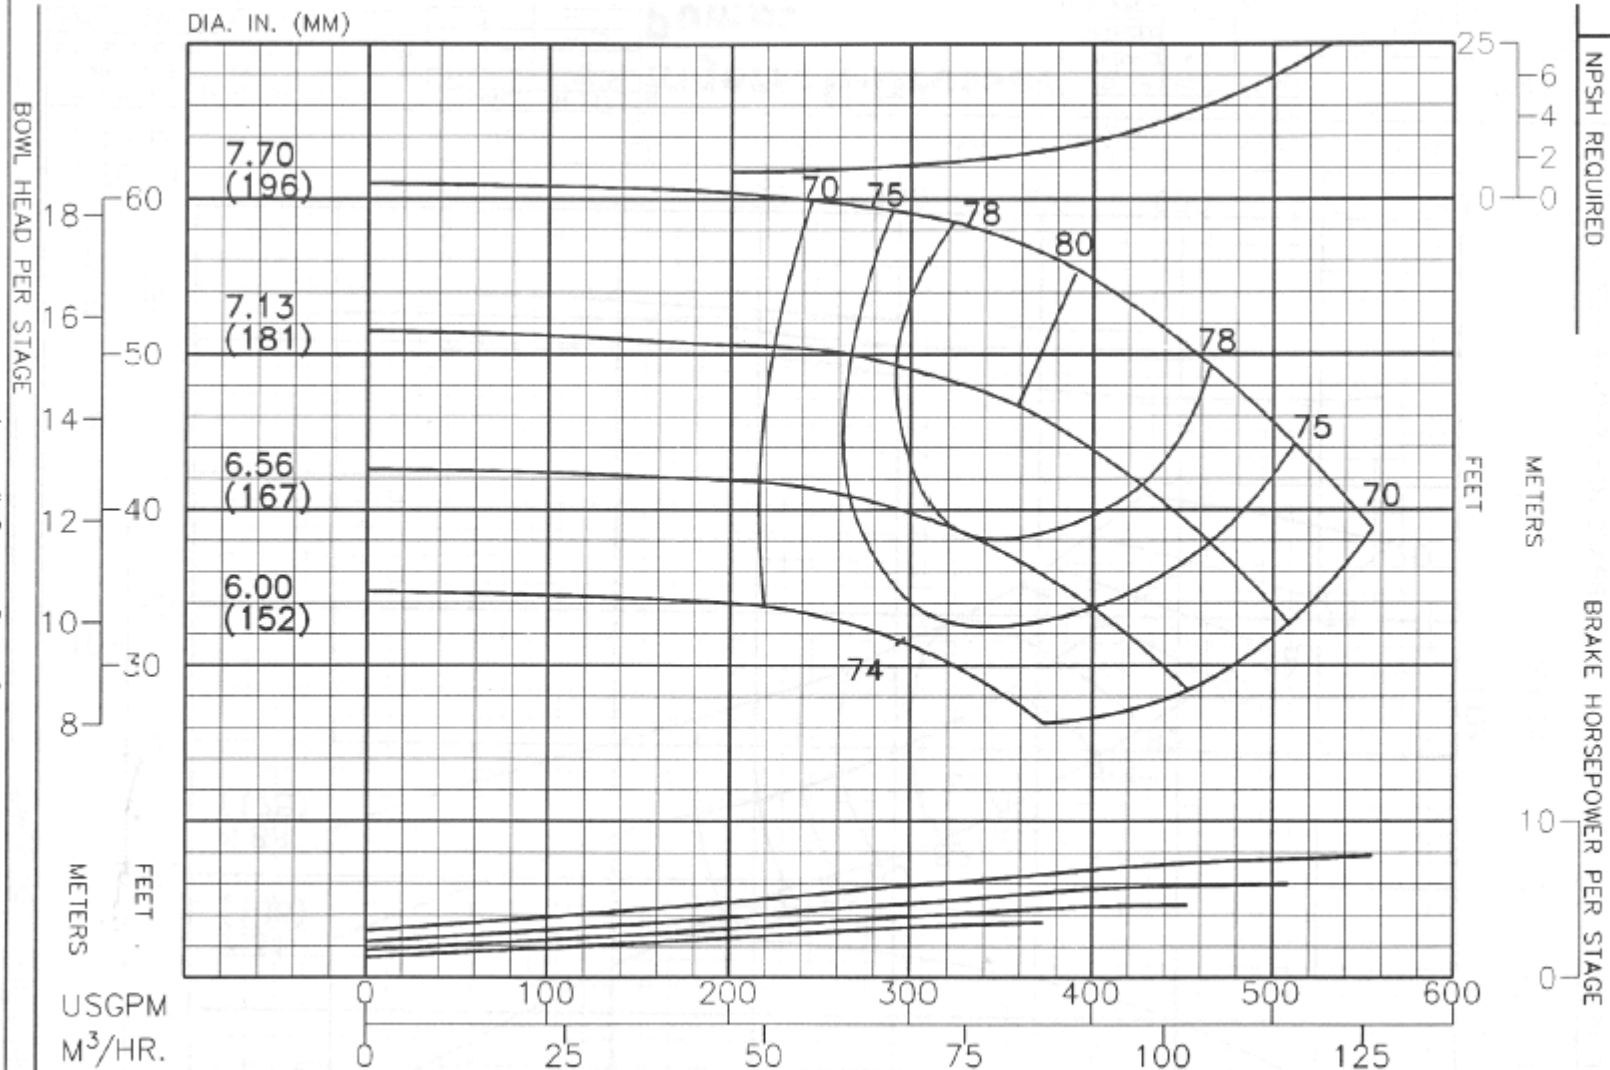

PERFORMANCE BASED ON PUMPING
CLEAR WATER BELOW 85°F. WITH LISTED
MATS. COLUMNS LOSSES NOT INCLUDED.
BOWL - CAST IRON - LINED
IMPELLER - BRONZE

CHANGE STAGES	IN EFF. POINTS
1	-3
2	-2
3	-1
4	0

Ingersoll-Dresser
Pumps

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	3.1	4.6
BALANCED	2.5	3.7
EYE AREA-8.64 SQ. IN.		

RPM	1770
ENCLOSED IMPELLER	
N _s = 1720	

PUMP	10JKH
CURVE NO.	EC-1476